



Customer information packet

VJPFPM2534T-5

30HP, 3505RPM, 3PH, 60HZ, 284JP, 3936M, OPSB, F

Class - None

Division - Not Applicable

Specifications

Enclosure	OPSB
Frame	284JP
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	30.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	575.0 V @ 60 HZ
Agency Approvals	UL CSA EEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	28.000 A @ 575.0 V
Design Code	B
Drip Cover	Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	91.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Drip Cover Mounting
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	28.0 a
Insulation Class	F
Inverter Code	Not Inverter

Part detail

Revision	R
Type	AC
Mech. spec.	39T043
Base	
Status	PRD/A
Elec. spec.	39WGX990
Layout	39LYT043
Eff. date	06-26-2024
CD Diagram	CD0382
Poles	02
Leads	6#12
Proprietary	False
Created date	07-21-2016

KVA Code	G
Lifting Lugs	Vertical Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	6 @ 12 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3936M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	29.23 IN
Power Factor	89
Product Family	Fire Pump Motor
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Tapped & Key
Rodent Screen	Included
Service Factor	1.15
Shaft Diameter	1.250 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	3505 rpm
Speed Code	Single Speed
Starting Method	Wye Start - Delta Run
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3454L

CAT.NO.	VJPFPM2534T-5				CUST P/N				I.P.				23	
SPEC.	39T043X990H2				SER.NO.				FRAME				284JP	
HZ	60	HP	30		RPM	3505		HZ		HP			RPM	
VOLTS	575				CODE	G		VOLTS					CODE	
AMPS	28				DES	B		AMPS					DES	
EFF	91	SER.F.		1.15		PF	89		EFF			SER.F.		PF
RATING	40C AMB-CONT				DE BRG		6312		GREASE		POLYREX EM			
BLANK					ODE BRG		6208		MTR. WT.		266			
					CLASS		F		PH	3				
					ENCL		OPSB		CC	010A				
HTR-VOLTS	HTR-AMPS				HTR-WATTS									

AC Induction Motor Performance Data

Record # 58305

Typical performance - not guaranteed values

Winding: 39WGX990-R001				Type: 3936M		Enclosure: OPSB	
Nameplate Data				575 V, 60 Hz: Single Voltage Motor			
Rated Output (HP)		30		Full Load Torque		44.9 LB-FT	
Volts		575		Start Configuration		direct on line	
Full Load Amps		28		Breakdown Torque		157 LB-FT	
R.P.M.		3505		Pull-up Torque		47.7 LB-FT	
Hz	60	Phase	3	Locked-rotor Torque		67.4 LB-FT	
NEMA Design Code		B	KVA Code	G	Starting Current		171 A
Service Factor (S.F.)		1.15		No-load Current		8.18 A	
NEMA Nom. Eff.		91	Power Factor	89	Line-line Res. @ 25°C		0.548 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		36°C	
S.F. Amps				Temp. Rise @ S.F. Load		44°C	
				Locked-rotor Power Factor		29.2	
				Rotor inertia		0.92 LB-FT2	

Load Characteristics 575 V, 60 Hz, 30 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	61	82	87	89	89	88	89
Efficiency	89.4	92.3	92.6	91.6	90.5	88.9	91
Speed	3578	3556	3533	3508	3481	3450	3492
Line amperes	10.4	15.1	21	27.5	34.5	42.3	31.7

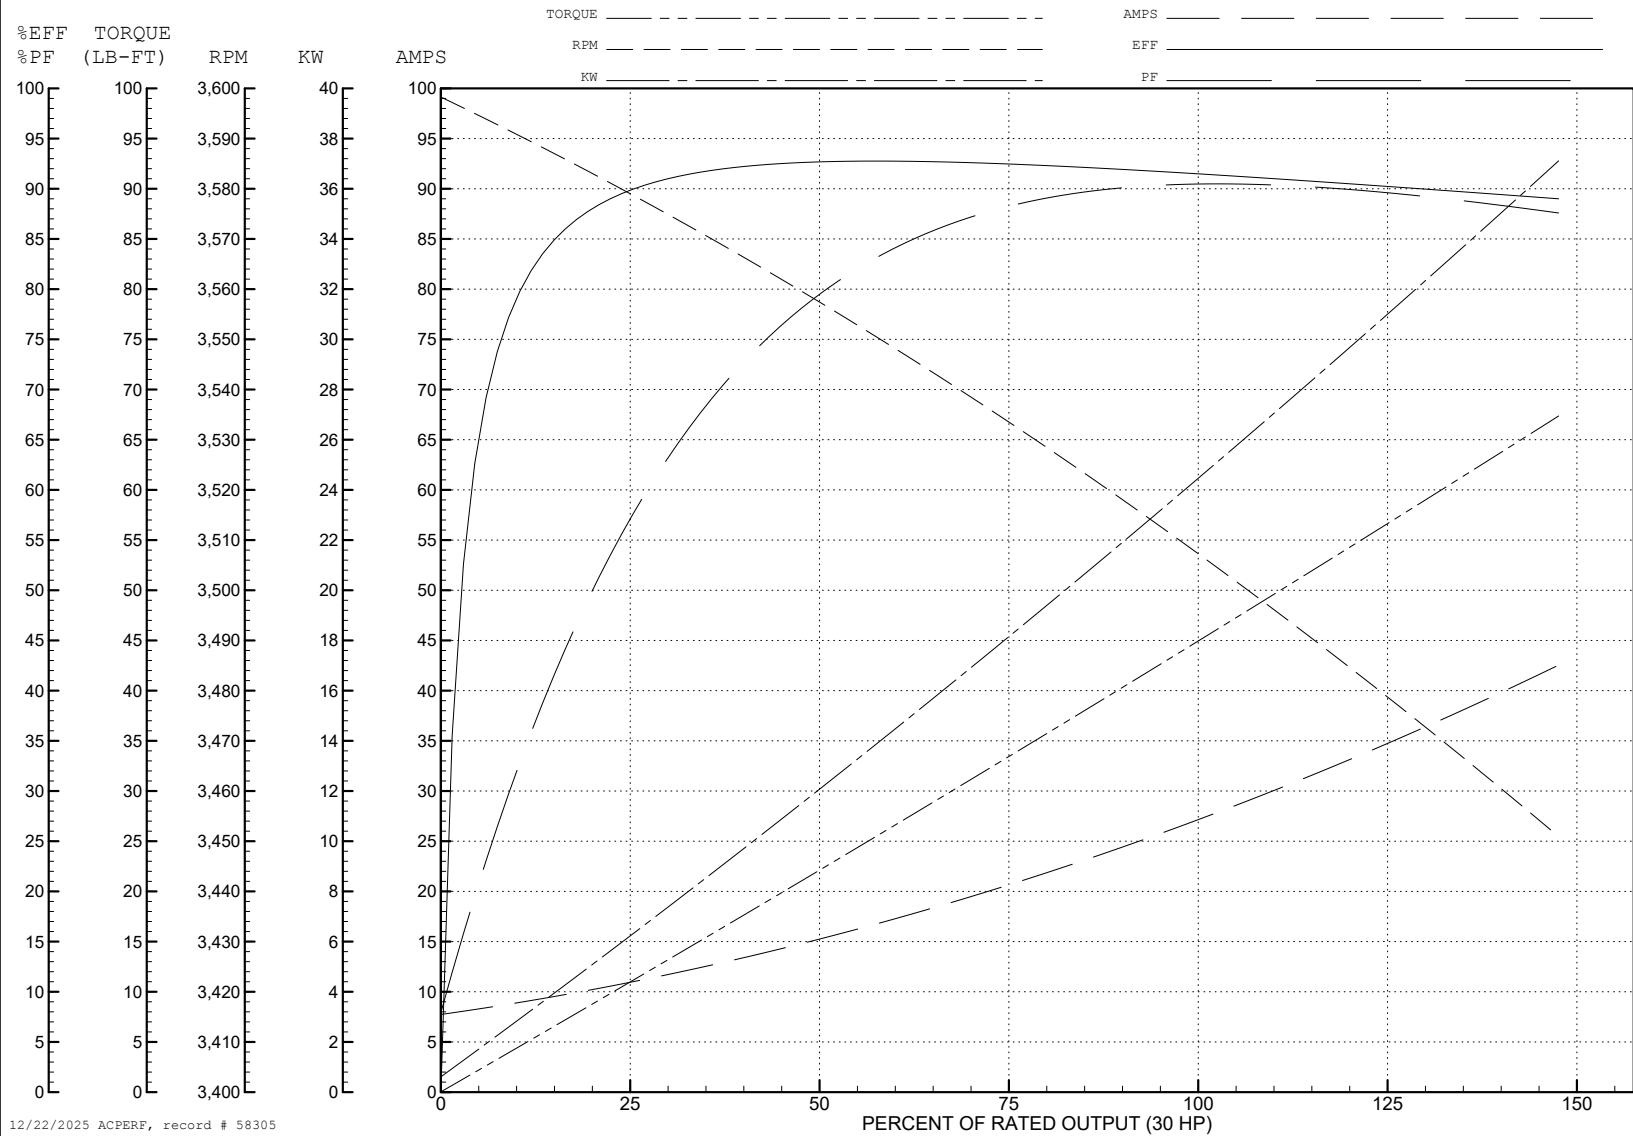
ABB Motors and Mechanical Inc.

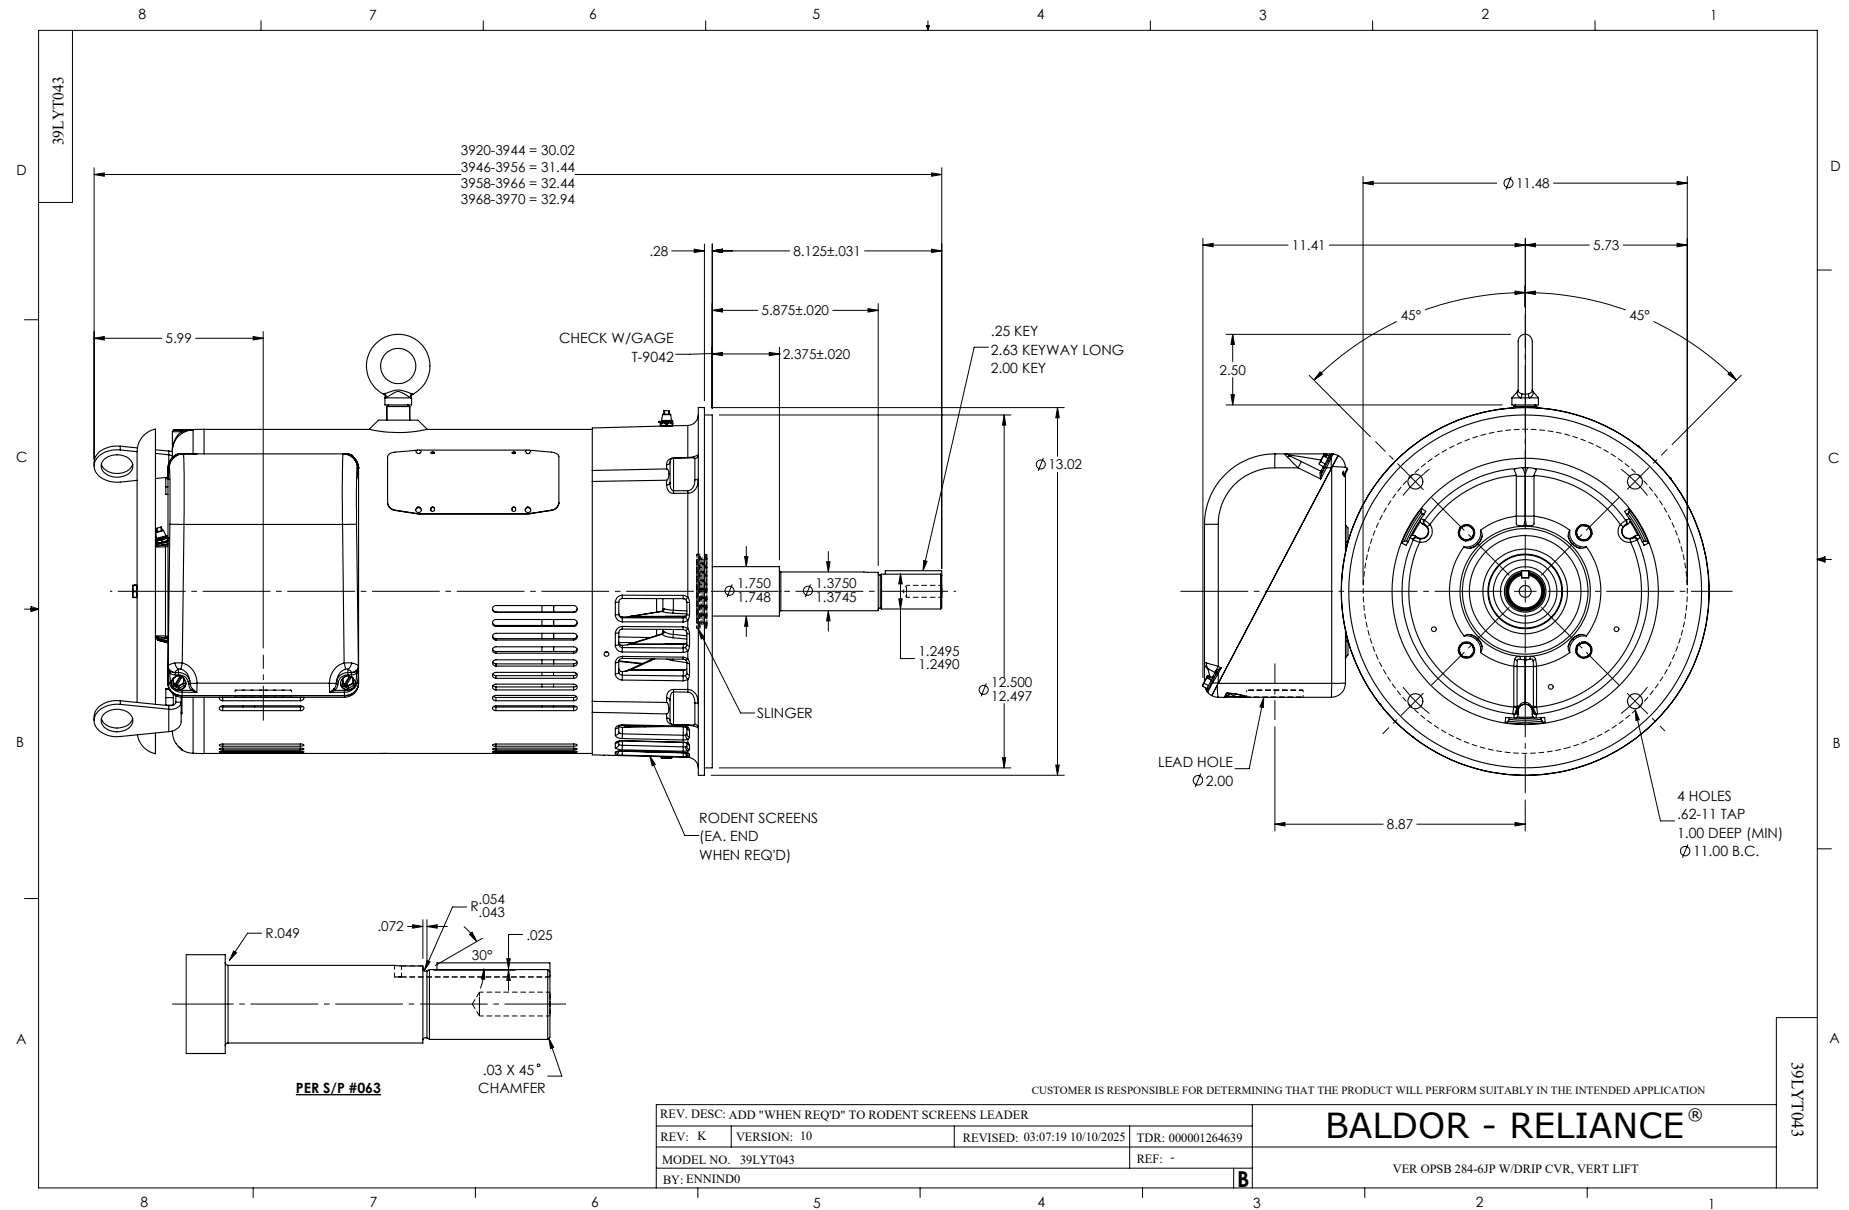
WINDING # 39WGX990

Typical performance - not guaranteed values.

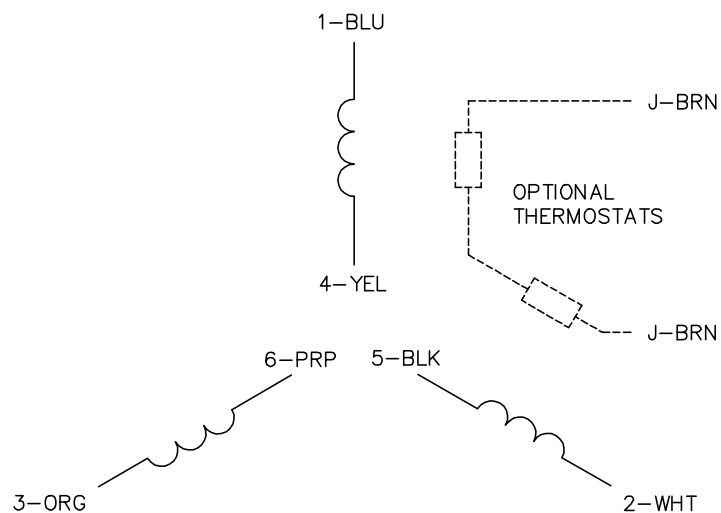

30 HP 3 PH 60 HZ 3505 RPM 575 V 3936M

TORQUES (LB-FT): PO=157 PU=47.7 LR=67.4 LRA=171






CD0382

RUN CONNECTION
(1D)

LINE

START CONNECTION
(1Y)

LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.
5. FOR ACROSS-THE-LINE STARTING, USE 'RUN' CONNECTION.

REV. DESC: ADD CLASS CONN00000007

REV. LTR: F

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\243

REVISED: 09:05:32 02/19/2019

BY: ENBRIRO

MTL: —



BALDOR - RELIANCE®

3PH, SV, 6 LEADS, Y START/D RUN

SH 1 of 1

CD0382