



Customer information packet

EM2552T-4

75HP, 1185RPM, 3PH, 60HZ, 405T, ODP, FOOT,
Class - None
Division - Not Applicable

Specifications

Enclosure	DP
Frame	405T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	75.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	CCSA US CCSAUSEEV CSA EEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Current @ Voltage	86.900 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	95.0 %
Feedback Device	NO FEEDBACK
Heater Indicator	No Heater
High Voltage Full Load Amps	86.9 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	G
Lifting Lugs	No Lifting Lugs
Motor Lead Quantity/Wire Size	6 @ 6 AWG
Motor Standards	NEMA

Part detail

Revision	S
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	A40WG0466
Layout	617428-118
Eff. date	12-19-2025
CD Diagram	416820-008
Poles	06
Leads	6#6
Proprietary	False
Created date	10-19-2010

Motor Type	A40064M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	33.95 IN
Power Factor	85
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Service Factor	1.15
Shaft Diameter	2.875 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1185 rpm
Speed Code	Single Speed
Starting Method	Wye Start - Delta Run
Thermal Device - Bearing	None
Thermal Device - Winding	None

Nameplate


NP2349L


SPEC NO.	P40G302			CAT.NO.	EM2552T-4					FRAME	405T	
HP	75	VOLTS	460		PHASE	3	DESIGN	B	TYPE	P		
RPM	1185	AMPS	86.9		HZ	60	AMB	40	SF	1.15		
DRIVE END BEARING	80BC03J30X			DUTY	CONT	INSUL.CLASS		F				
OPP D.E. BEARING	80BC03J30X			ENCL	DP	CODE	G					
SER.NO.				POWER FACTOR		85	NEMA-NOM-EFFICIENCY					95
							MAX CORR KVAR		15.0	GUARANTEED EFFICIENCY		94.5
							NEMA NOM/CSA QUOTED EFF					
							MOTOR WEIGHT					


Accessories

Part number	Description	Multiplier
089407053B	C-FACE BRKT 400 089407053WCA	P1
089407054B	D-FLANGE BRKT 400 089407054WCA, D-FLG	

REL. S.O.	FRAME	HP	TYPE	PHASE/ HERTZ	RPM	VOLTS
	405T	75	P	3/60	1185	460
AMPS	DUTY	AMB °C/ INSUL.	S.F.	NEMA DESIGN	CODE LETTER	ENCL.
86.9	CONT	40/F	1.15	B	G	ODP
E/S	ROTOR	TEST S.O.	TEST DATE	STATOR RES. @25 °C OHMS (BETWEEN LINES)		
496415	418142-71-EE	---	---	.0860		
PERFORMANCE						
LOAD	HP	AMPERES	RPM	% POWER FACTOR	% EFFICIENCY	
NO LOAD	0	31.0	1200	4.11	0	
1/4	18.8	37.2	1197	51.1	92.5	
2/4	37.5	50.7	1194	73.0	95.0	
3/4	56.2	67.7	1190	81.6	95.3	
4/4	75.0	86.9	1187	85.1	95.0	
5/4	93.8	108	1183	86.2	94.4	
SPEED TORQUE						
	RPM	TORQUE % FULL LOAD	TORQUE LB.-FT.	AMPERES		
LOCKED ROTOR	0	165	549	541		
PULL UP	400	156	519	509		
BREAKDOWN	1132	243	808	302		
FULL LOAD	1187	100	332	86.9		
AMPERES SHOWN FOR 460. VOLT CONNECTION. IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE						
REMARKS: TYPICAL DATA XE MOTOR-NEMA NOM. EFF. 95.0 %, GUAR. MIN. EFF. 94.5 %						
			DR. BY J.J. HARRISON CK. BY W.I. SMITH APP. BY W.I. SMITH DATE 09/08/09		A-C MOTOR PERFORMANCE DATA A40WG0466-R001 ISSUE DATE 12/15/10	

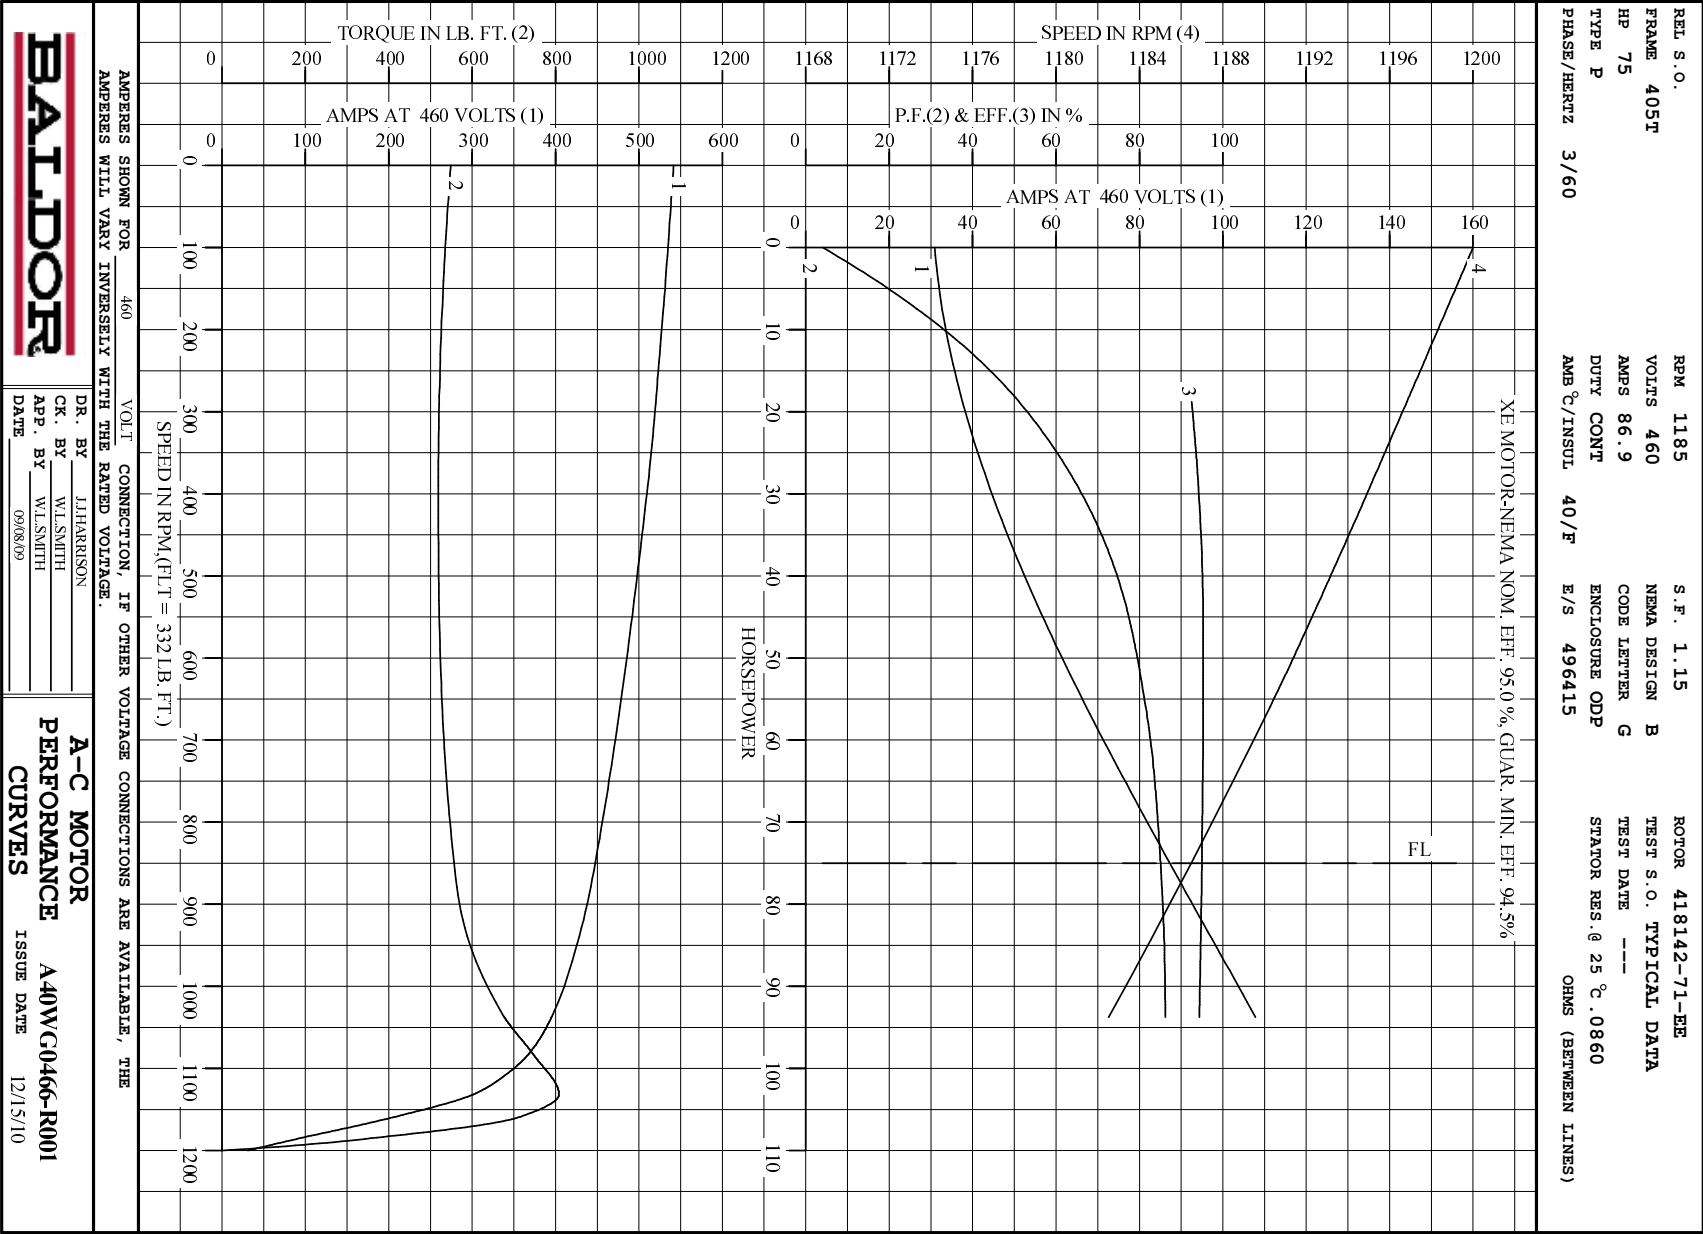


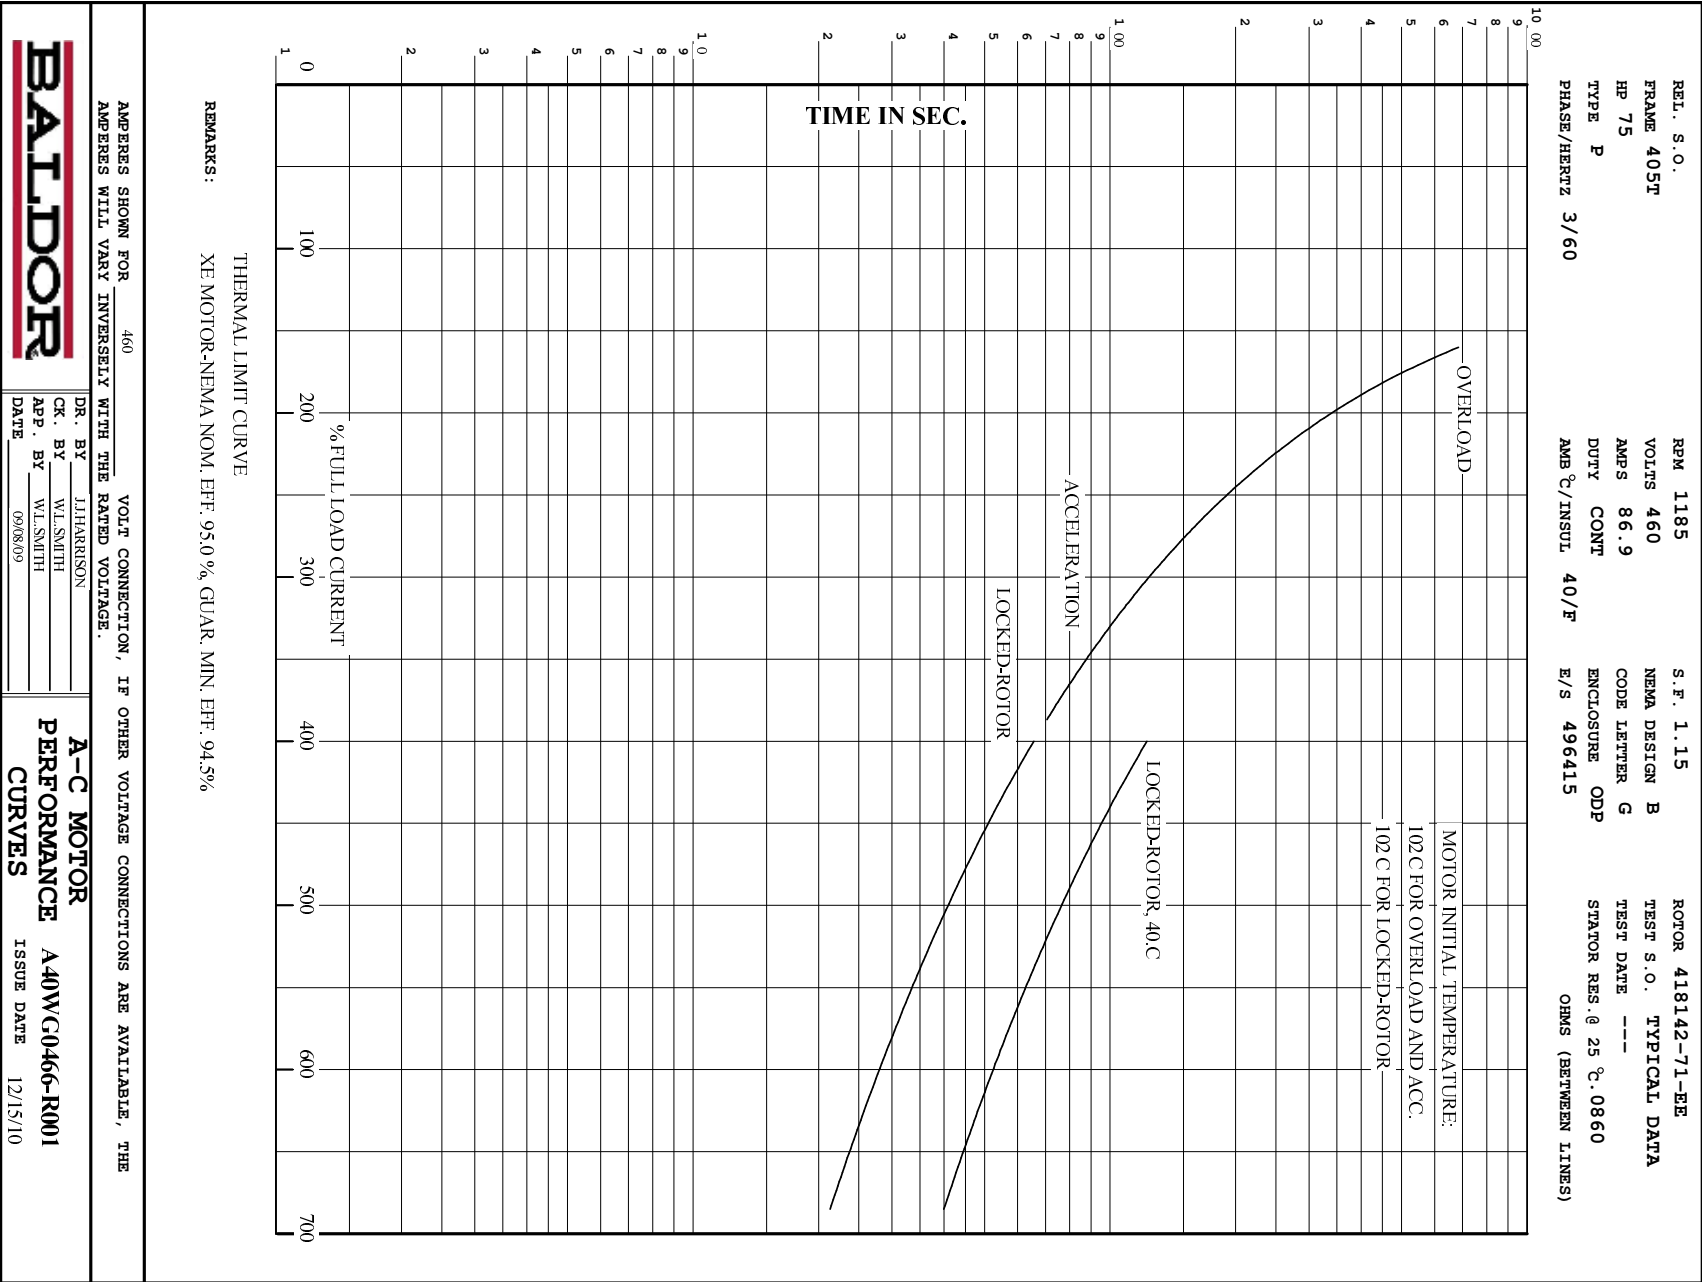


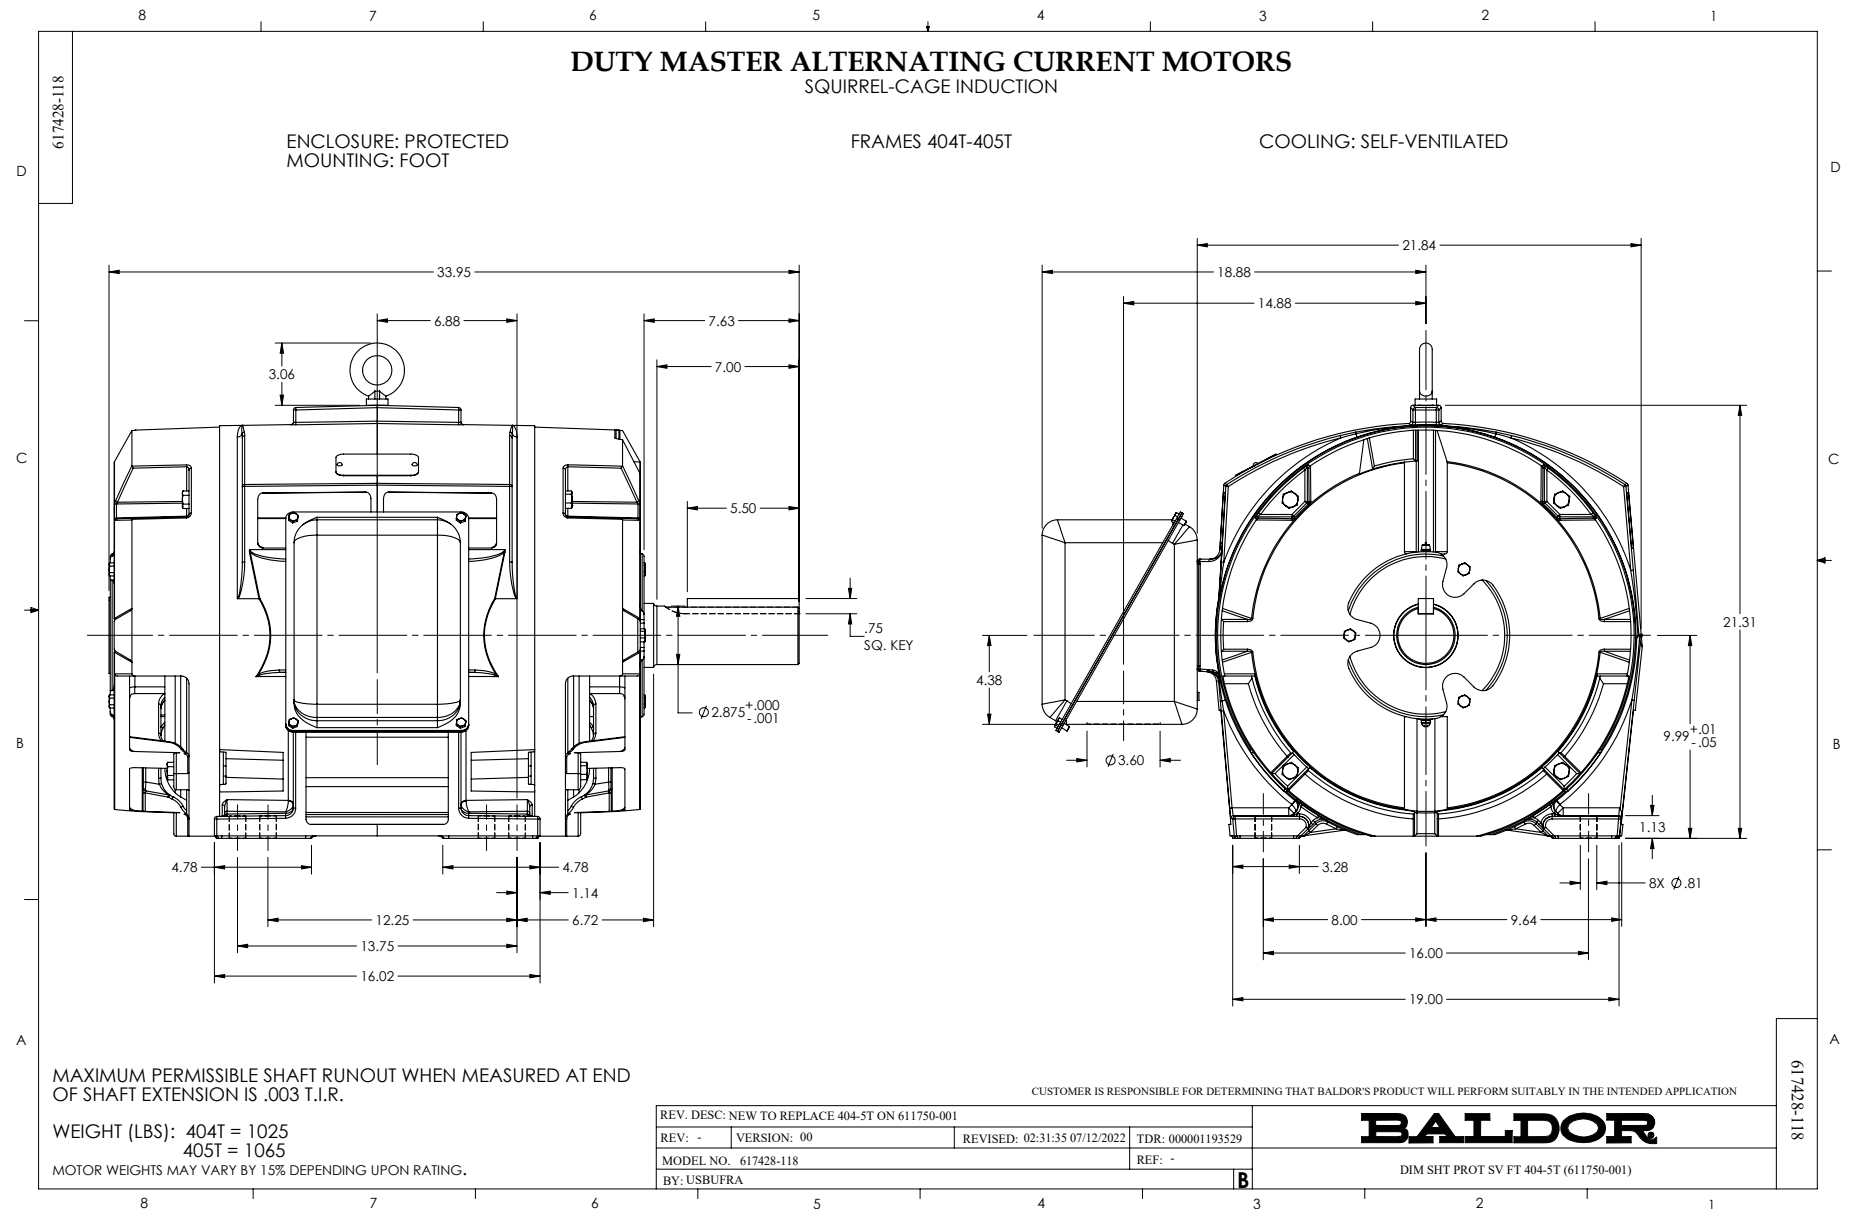

416820-008

A-C MOTOR
CONNECTION DIAGRAM

STANDARD 6 LEAD Y START – DELTA RUN

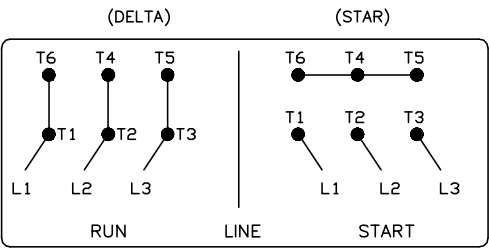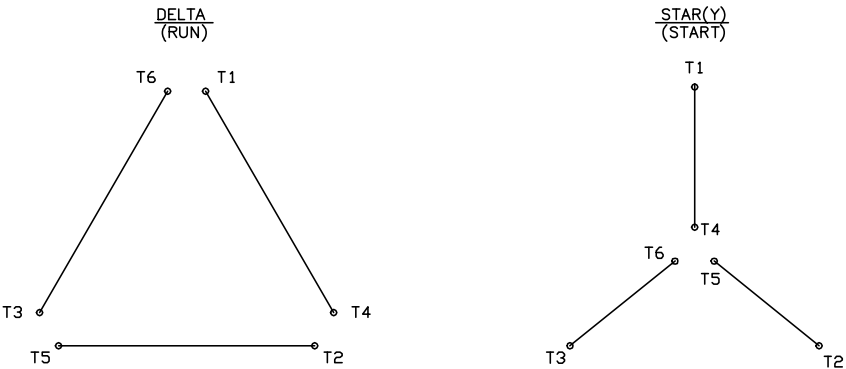

< N. P. 1767-DC >

REV. DESC: ADDED T4 TO Y CONNECT DIAGRAM		
REV. LTR: D	VERSION: 04	TDR: 000000847713
FILE: \RAG\00001\808	REVISED: 10: 41: 26 04/08/2014	BY: RAGJSS1
MTL: -	© □	

BALDOR

CONNECT DIAGRAM STD 6 LEAD Y START DELTA RUN
SH 1 of 1

416820-008