



Customer information packet

L3505

.5HP, 1145RPM, 1PH, 60HZ, 56H, 3526L, TEFC, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	56H
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Cap Start, Induction Run
Output @ Frequency	.500 HP @ 60 HZ
Phase	1
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	115.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	CSA UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	8.000 A @ 115.0 V 4.000 A @ 230.0 V
Design Code	N
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	62.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	4.0 a
Insulation Class	F

Part detail

Revision	C
Type	AC
Mech. spec.	35J383
Base	
Status	PRD/A
Elec. spec.	35WGG379
Layout	35LYJ383
Eff. date	07-01-2024
CD Diagram	CD0001
Poles	06
Leads	6#18
Proprietary	False
Created date	02-23-2023

Inverter Code	Not Inverter
KVA Code	F
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Quantity/Wire Size	6 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3526L
Mounting Arrangement	F1
Number of Poles	6
Overall Length	12.91 IN
Power Factor	70
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.25
Shaft Diameter	0.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1145 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1256L											
CAT.NO.	L3505										
SPEC.	35J383G379G1										
HP	.5										
VOLTS	115/230										
AMP	8/4										
RPM	1145										
FRAME	56H		HZ	60				PH	1		
SER.F.	1.25	CODE	F	DES	N	CLASS		F			
NEMA-NOM-EFF	62	PF	70								
RATING	40C AMB-CONT										
CC											
DE	6205		ODE	6203							
ENCL	TEFC	SN									
	SFA 8.8/4.4										

Accessories

Part number	Description	Multiplier
35-8762	C FACE KIT	A8
35EP1506A01SP	D-FLANGE KIT	A8

AC Induction Motor Performance Data

Record # 91089

Preliminary Data Sheet

Winding: 35WGG379-R002				Type: 3526L		Enclosure: TEFC	
Nameplate Data				115 V, 60 Hz: Low Voltage Connection			
Rated Output (HP)		.5		Full Load Torque		2.27 LB-FT	
Volts		115/230		Start Configuration		direct on line	
Full Load Amps		8/4		Breakdown Torque		4.64 LB-FT	
R.P.M.		1145		Pull-up Torque		5.21 LB-FT	
Hz	60	Phase	1	Locked-rotor Torque		9.35 LB-FT	
NEMA Design Code		N	KVA Code	F	Starting Current		28.22 A
Service Factor (S.F.)		1.25		No-load Current		6.12 A	
NEMA Nom. Eff.		62	Power Factor	70	Line-line Res. @ 25°C		1.65 Ω A Ph 1.71 Ω B Ph
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		61°C	
S.F. Amps		8.8/4.4		Temp. Rise @ S.F. Load		75°C	
				Locked-rotor Power Factor		100	
				Rotor inertia		0.188 lb-ft²	

Load Characteristics 115 V, 60 Hz, 0.5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	33	45	55	63	70	75	70
Efficiency	41.2	56.2	63.3	65.7	65.6	62.5	65.6
Speed	1189	1180	1171	1159	1146	1125	1146
Line amperes	6.09	6.45	7.03	7.83	8.84	10.39	8.84


ABB Motors and Mechanical Inc.


WINDING # 35WGG379

Typical performance - not guaranteed values.

0.5 HP 1 PH 60 HZ 1145 RPM 115 V 3526L

TORQUES (LB-FT): PO=4.64 PU=5.21 LR=9.35 LRA=28.22

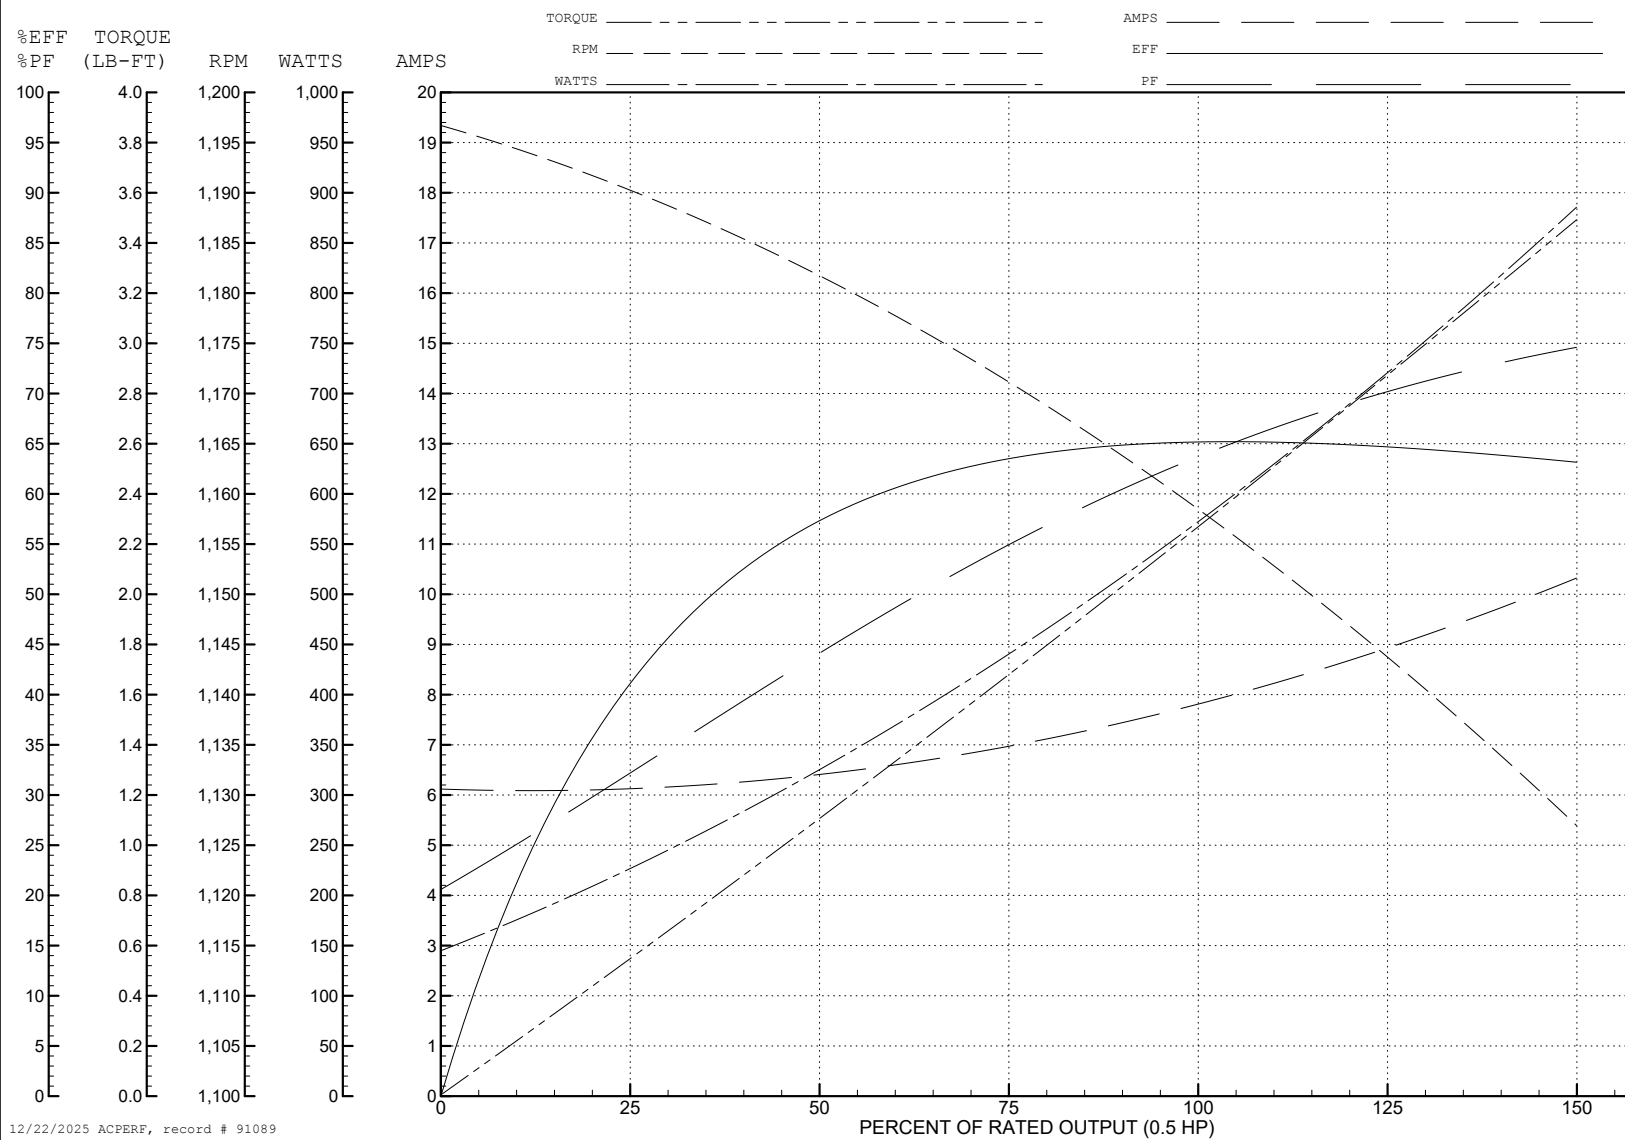

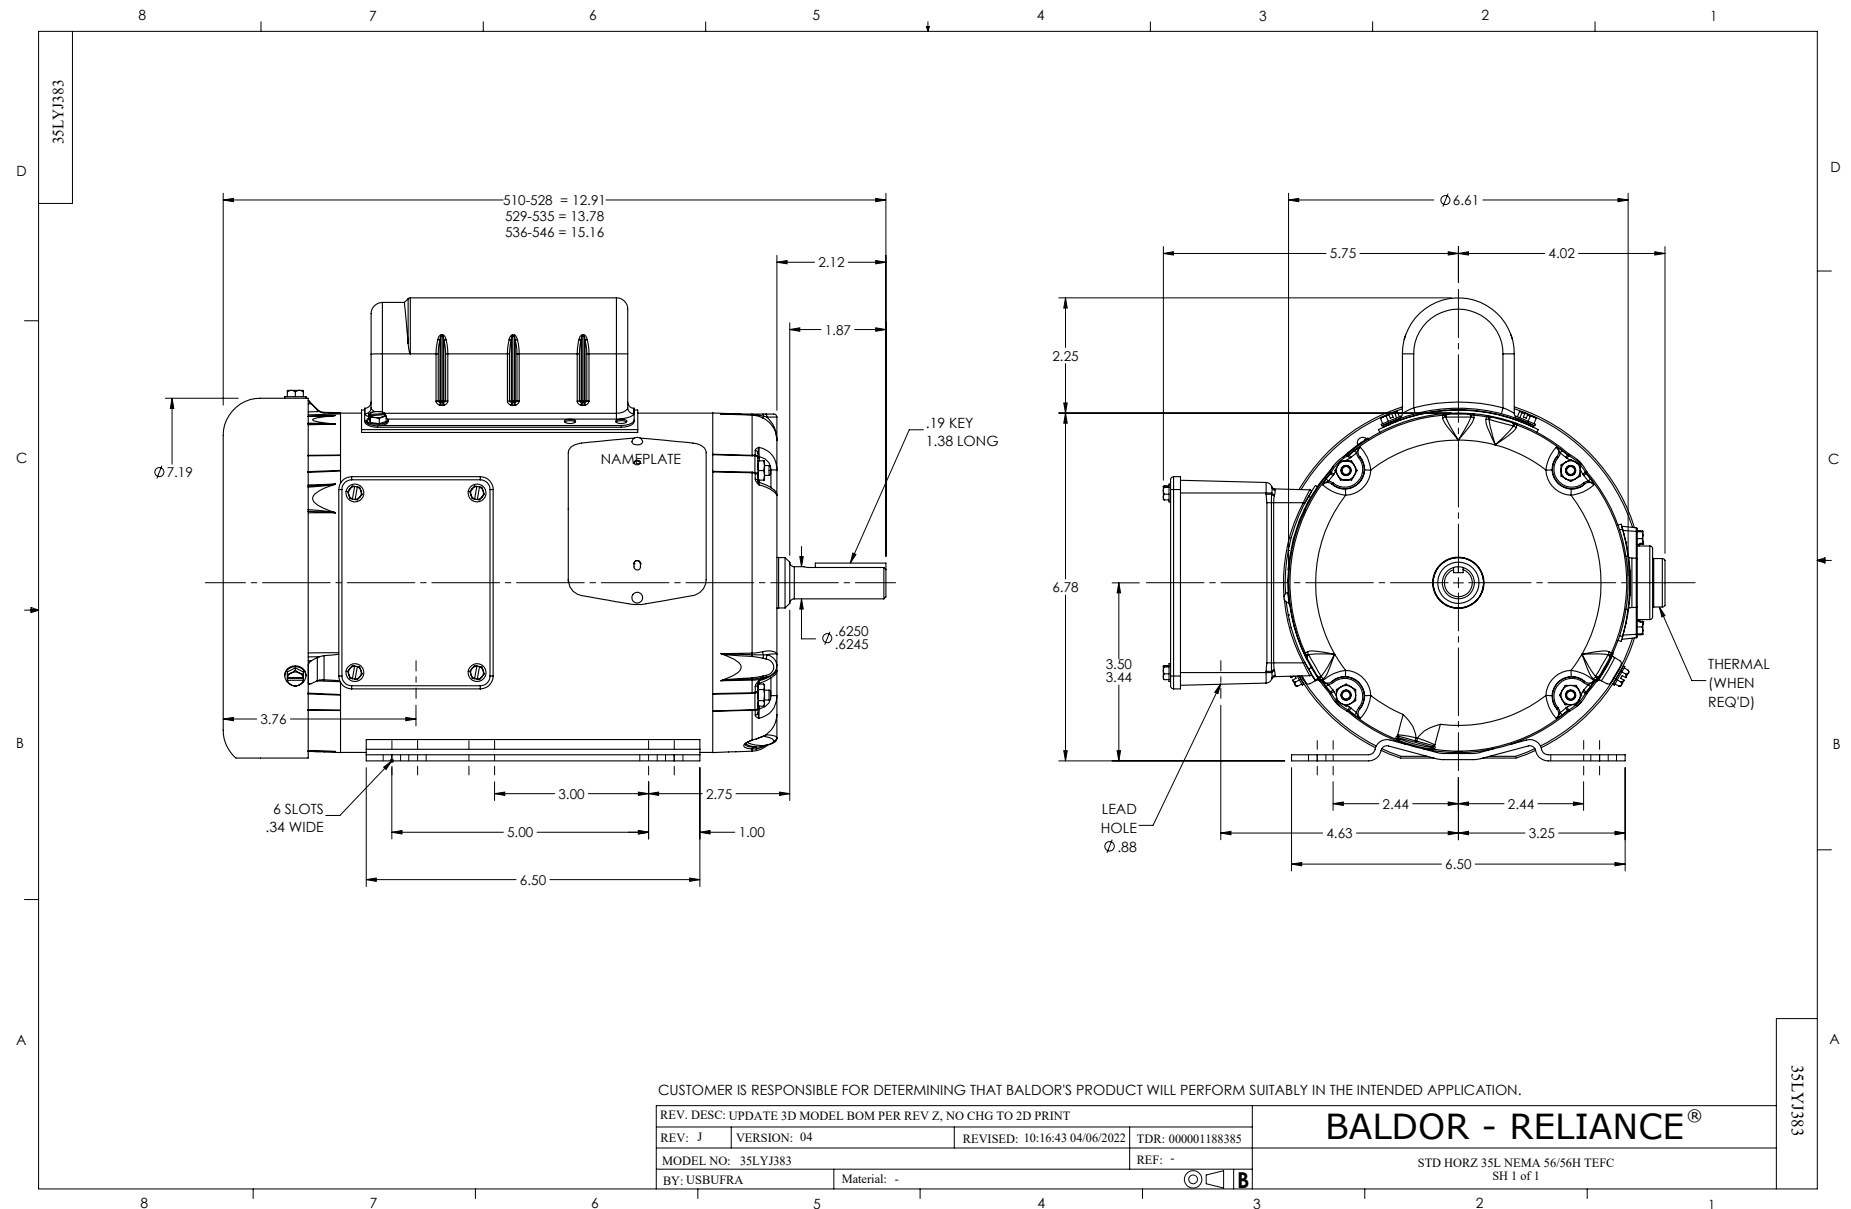

CD0001

