



Customer information packet

M1207T

3/.75HP, 1725/850RPM, 3PH, 60HZ, 184T, 3623M

Class - None

Division - Not Applicable

Specifications

Enclosure	OPEN
Frame	184T
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	3.000 HP @ 60 HZ .750 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	UR CSA
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	4.000 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	1.5 a
Insulation Class	F
Inverter Code	Not Inverter

Part detail

Revision	AC
Type	AC
Mech. spec.	36B001
Base	
Status	PRD/A
Elec. spec.	36WGX025
Layout	36LYB001
Eff. date	10-30-2025
CD Diagram	CD0032
Poles	04/08
Leads	6#16
Proprietary	False
Created date	01-01-0001

KVA Code	F
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	6 @ 16 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3623M
Mounting Arrangement	F1
Number of Poles	4 8
Overall Length	13.62 IN
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.125 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1725 rpm 850 rpm
Speed Code	2S-1W-VT
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1256L									
CAT.NO.	M1207T								
SPEC.	36B01X25								
HP	3/.75								
VOLTS	460								
AMP	4/1.5								
RPM	1725/850								
FRAME	184T		HZ	60			PH	3	
SER.F.	1.15	CODE	F	DES	B	CLASS	F		
NEMA-NOM-EFF		PF							
RATING	40C AMB-CONT								
CC									
DE	6206		ODE	6205					
ENCL	OPEN	SN							

Accessories

Part number	Description	Multiplier
36-3403	C FACE KIT	A8
36EP1405A09SP	D-FLANGE KIT	A8

AC Induction Motor Performance Data

Record # 61317

Typical performance - not guaranteed values

Winding: 36WGX025-R003			Type: 3623M		Enclosure: OPEN			
Nameplate Data			460 V, 60 Hz: High Speed Connection					
Rated Output (HP)		3/.75	Full Load Torque		9 LB-FT			
Volts		460	Start Configuration		direct on line			
Full Load Amps		4/1.5	Breakdown Torque		23 LB-FT			
R.P.M.		1725/850	Pull-up Torque		18 LB-FT			
Hz	60	Phase	3	Locked-rotor Torque		19 LB-FT		
NEMA Design Code		B	KVA Code	F	Starting Current		20.5 A	
Service Factor (S.F.)		1.15	No-load Current		1.4 A			
NEMA Nom. Eff.		0	Power Factor		0	Line-line Res. @ 25°C		8.46 Ω
Rating - Duty		40C	AMB-CONT		Temp. Rise @ Rated Load		56°C	
S.F. Amps					Temp. Rise @ S.F. Load		71°C	
					Locked-rotor Power Factor		67.1	
					Rotor inertia		0.216 LB-FT2	

Load Characteristics 460 V, 60 Hz, 3 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	51	73	81	85	87	87	86
Efficiency	79	83	82	79	75	71	76.6
Speed	1769	1740	1705	1670	1619	1568	1639
Line amperes	1.75	2.3	3.1	4	5	6.1	4.6


ABB Motors and Mechanical Inc.

WINDING # 36WGX025

Typical performance - not guaranteed values.

3 HP 3 PH 60 HZ 1670 RPM 460 V 3623M

TORQUES (LB-FT): PO=23 PU=18 LR=19 LRA=20.5

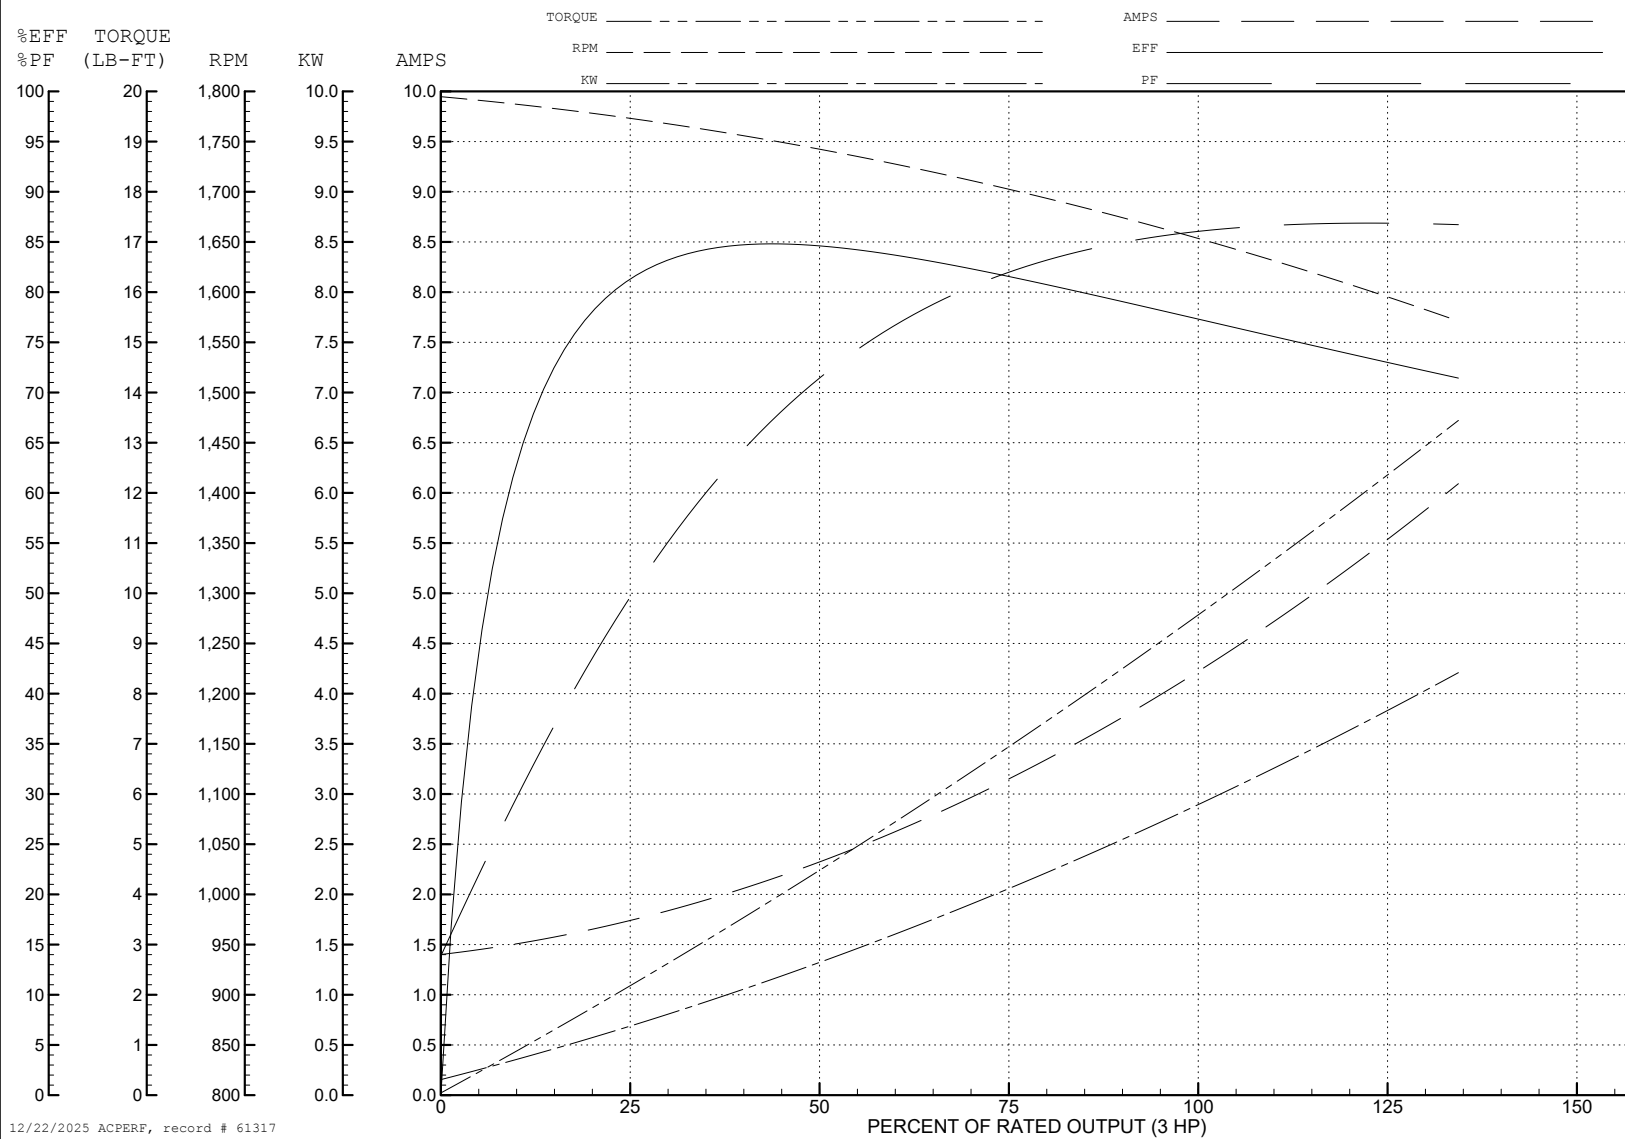

AC Induction Motor Performance Data

Record # 61318

Typical performance - not guaranteed values

Winding: 36WGX025-R003			Type: 3623M		Enclosure: OPEN		
Nameplate Data			460 V, 60 Hz: Low Speed Connection				
Rated Output (HP)		3/.75	Full Load Torque		4.6 LB-FT		
Volts		460	Start Configuration		direct on line		
Full Load Amps		4/1.5	Breakdown Torque		8.5 LB-FT		
R.P.M.		1725/850	Pull-up Torque		6 LB-FT		
Hz	60	Phase	3	Locked-rotor Torque		6.2 LB-FT	
NEMA Design Code		B	KVA Code	F	Starting Current		4.6 A
Service Factor (S.F.)			1.15	No-load Current		0.95 A	
NEMA Nom. Eff.		0	Power Factor	0	Line-line Res. @ 25°C		33.8 Ω
Rating - Duty			40C	AMB-CONT		Temp. Rise @ Rated Load	37°C
S.F. Amps				Temp. Rise @ S.F. Load		45°C	
				Locked-rotor Power Factor		57.1	
				Rotor inertia		0.216 LB-FT2	

Load Characteristics 460 V, 60 Hz, 0.75 HP

% of Rated Load	25	50	75	100	125	S.F.
Power Factor	30	47	59	65	72	69
Efficiency	60.1	70.1	72	71	67	68.6
Speed	887	875	860	842	820	829
Line amperes	1	1.1	1.25	1.5	1.75	1.65


ABB Motors and Mechanical Inc.

WINDING # 36WGX025


Typical performance - not guaranteed values.

0.75 HP 3 PH 60 HZ 842 RPM 460 V 3623M


TORQUES (LB-FT): PO=8.5 PU=6 LR=6.2 LRA=4.6

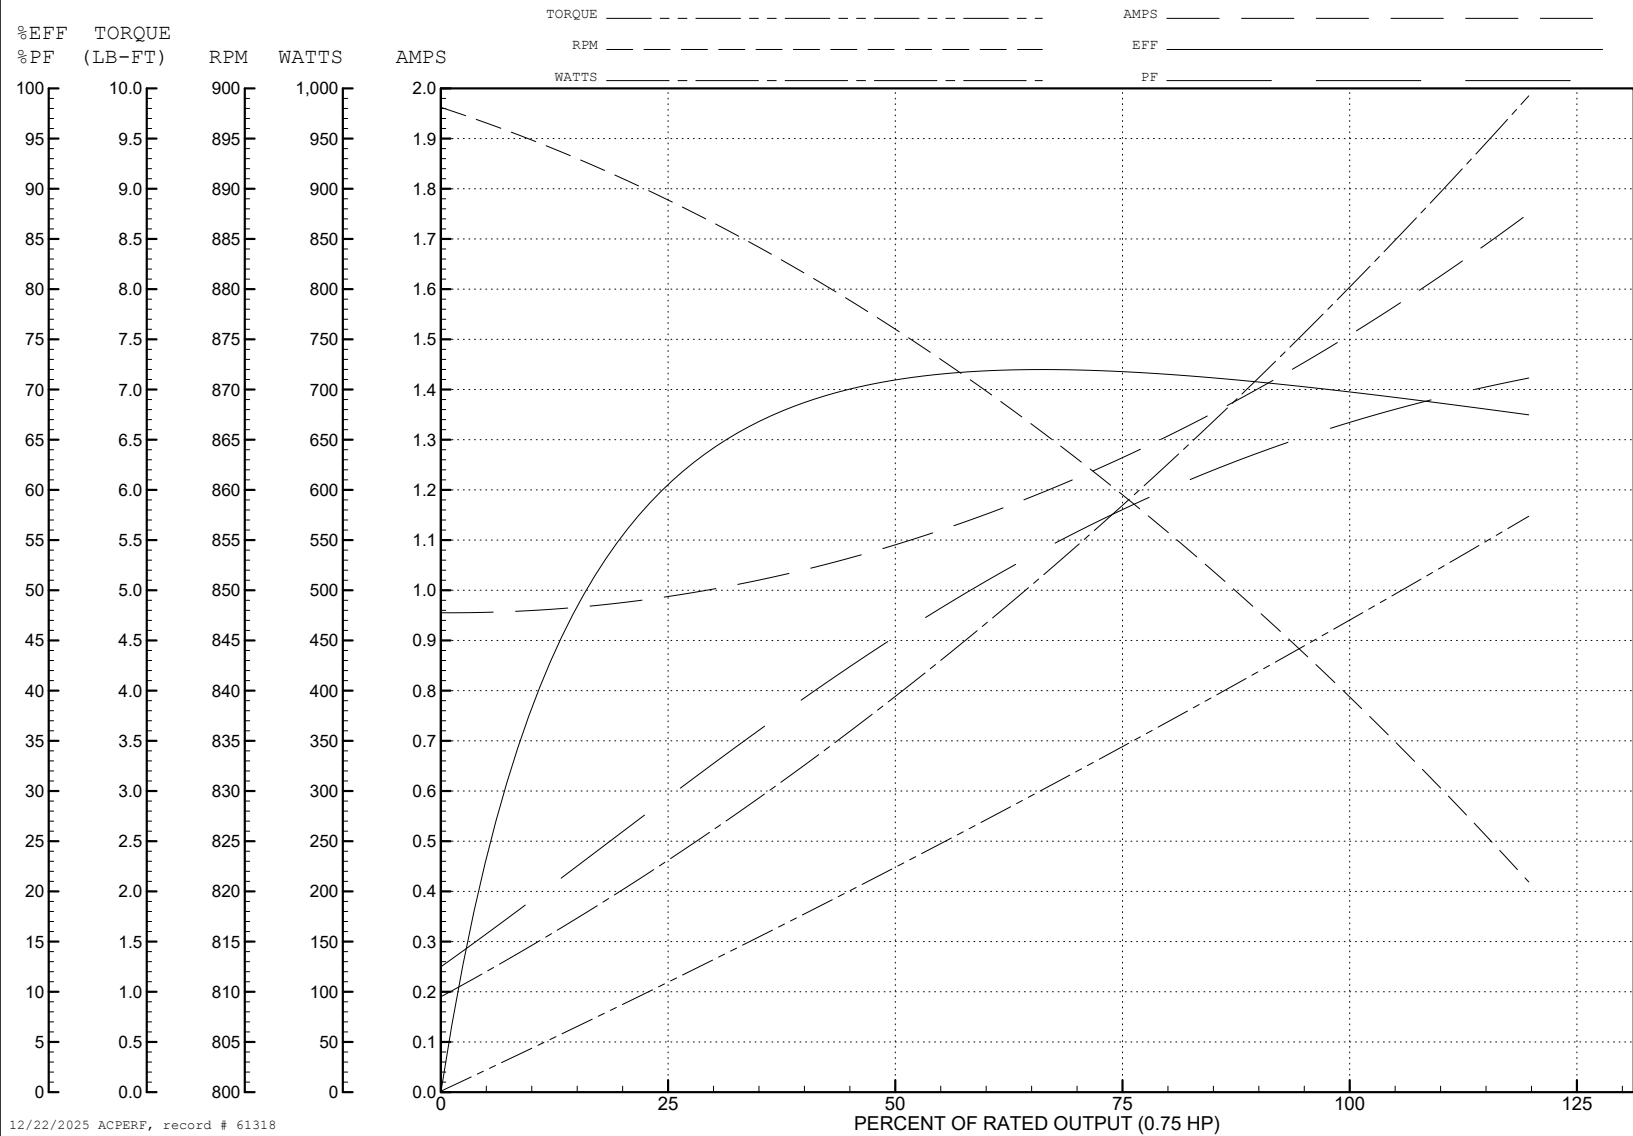

12/22/2025 ACPERF, record # 61318

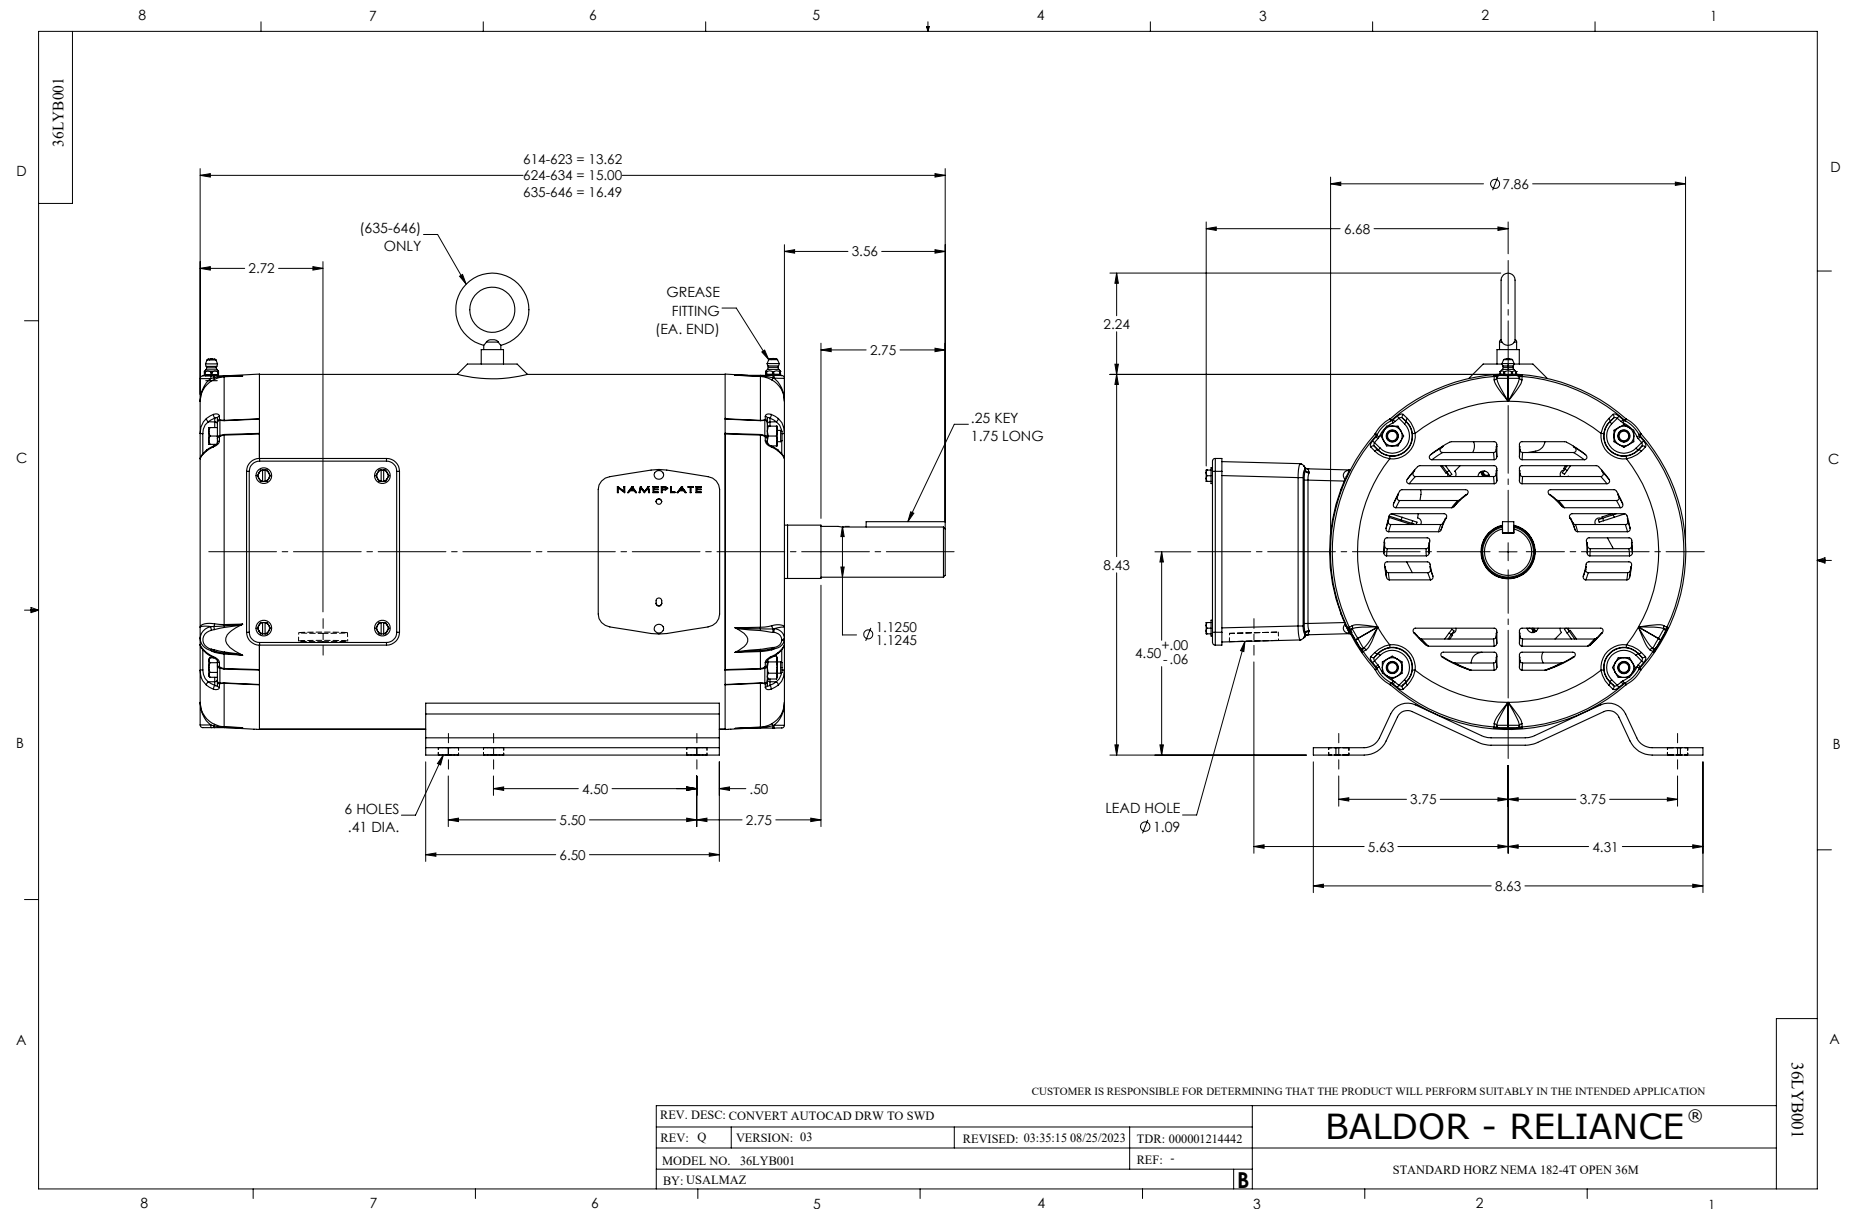

CD0032

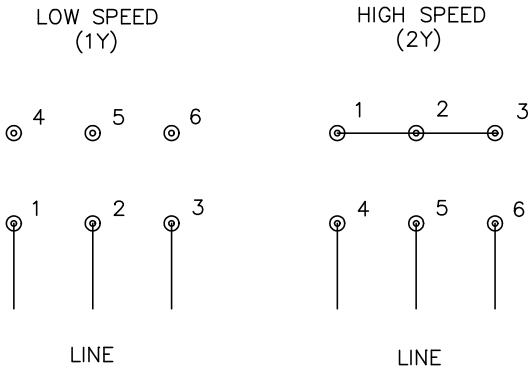

- NOTES:
- 1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
 - 2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
 - 3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
 - 4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/22/99 8:27	TDR: 0171435
CD0032		FILE: AAA00005145	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, SV, 6 LEADS, 2-SPEED 1-WINDING VARIABLE TORQUE

CD0032