



Customer information packet

M1222T

2/.89HP, 1725/1140RPM, 3PH, 60HZ, 182T, 3628M

Class - None

Division - Not Applicable

Specifications

Enclosure	OPEN
Frame	182T
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	2.000 HP @ 60 HZ .890 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	UR CSA
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	3.000 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	1.6 a
Insulation Class	F
Inverter Code	Not Inverter

Part detail

Revision	AC
Type	AC
Mech. spec.	36B001
Base	
Status	PRD/A
Elec. spec.	36WG3120
Layout	36LYB001
Eff. date	10-30-2025
CD Diagram	CD0013
Poles	04/06
Leads	6#16
Proprietary	False
Created date	01-01-0001

KVA Code	F
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	6 @ 16 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3628M
Mounting Arrangement	F1
Number of Poles	4 6
Overall Length	15.00 IN
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.125 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1140 rpm 1725 rpm
Speed Code	2S-2W-VT
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1256L									
CAT.NO.	M1222T								
SPEC.	36B01-3120								
HP	2/.89								
VOLTS	460								
AMP	3/1.6								
RPM	1725/1140								
FRAME	182T		HZ	60			PH	3	
SER.F.	1.15		CODE	F	DES	B	CLASS	F	
NEMA-NOM-EFF			PF						
RATING	40C AMB-CONT								
CC									
DE	6206		ODE	6205					
ENCL	OPEN		SN						

Accessories

Part number	Description	Multiplier
36-3403	C FACE KIT	A8
36EP1405A09SP	D-FLANGE KIT	A8

AC Induction Motor Performance Data

Record # 61298

Typical performance - not guaranteed values

Winding: 36WG3120-R002			Type: 3628M		Enclosure: TEFC			
Nameplate Data			460 V, 60 Hz: High Speed Connection					
Rated Output (HP)		2/.89	Full Load Torque		6 LB-FT			
Volts		460	Start Configuration		direct on line			
Full Load Amps		3/1.6	Breakdown Torque		16.5 LB-FT			
R.P.M.		1725/1140	Pull-up Torque		12.7 LB-FT			
Hz	60	Phase	3	Locked-rotor Torque		14.7 LB-FT		
NEMA Design Code		B	KVA Code	F	Starting Current		16.7 A	
Service Factor (S.F.)		1.15	No-load Current		1.1 A			
NEMA Nom. Eff.		0	Power Factor		0	Line-line Res. @ 25°C		14.3 Ω
Rating - Duty		40C	AMB-CONT		Temp. Rise @ Rated Load		62°C	
S.F. Amps			Temp. Rise @ S.F. Load		77°C			
			Locked-rotor Power Factor		69.7			
			Rotor inertia		0.263 LB-FT2			

Load Characteristics 460 V, 60 Hz, 2 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	52	67	85	87	95	92	92
Efficiency	69.6	77.5	78.4	78.1	77	73.7	77.4
Speed	1775	1750	1736	1710	1691	1647	1699
Line amperes	1.3	1.8	2.1	2.7	3.1	3.9	2.94


ABB Motors and Mechanical Inc.

WINDING # 36WG3120

Typical performance - not guaranteed values.

2 HP 3 PH 60 HZ 1710 RPM 460 V 3628M

TORQUES (LB-FT): PO=16.5 PU=12.7 LR=14.7 LRA=16.7

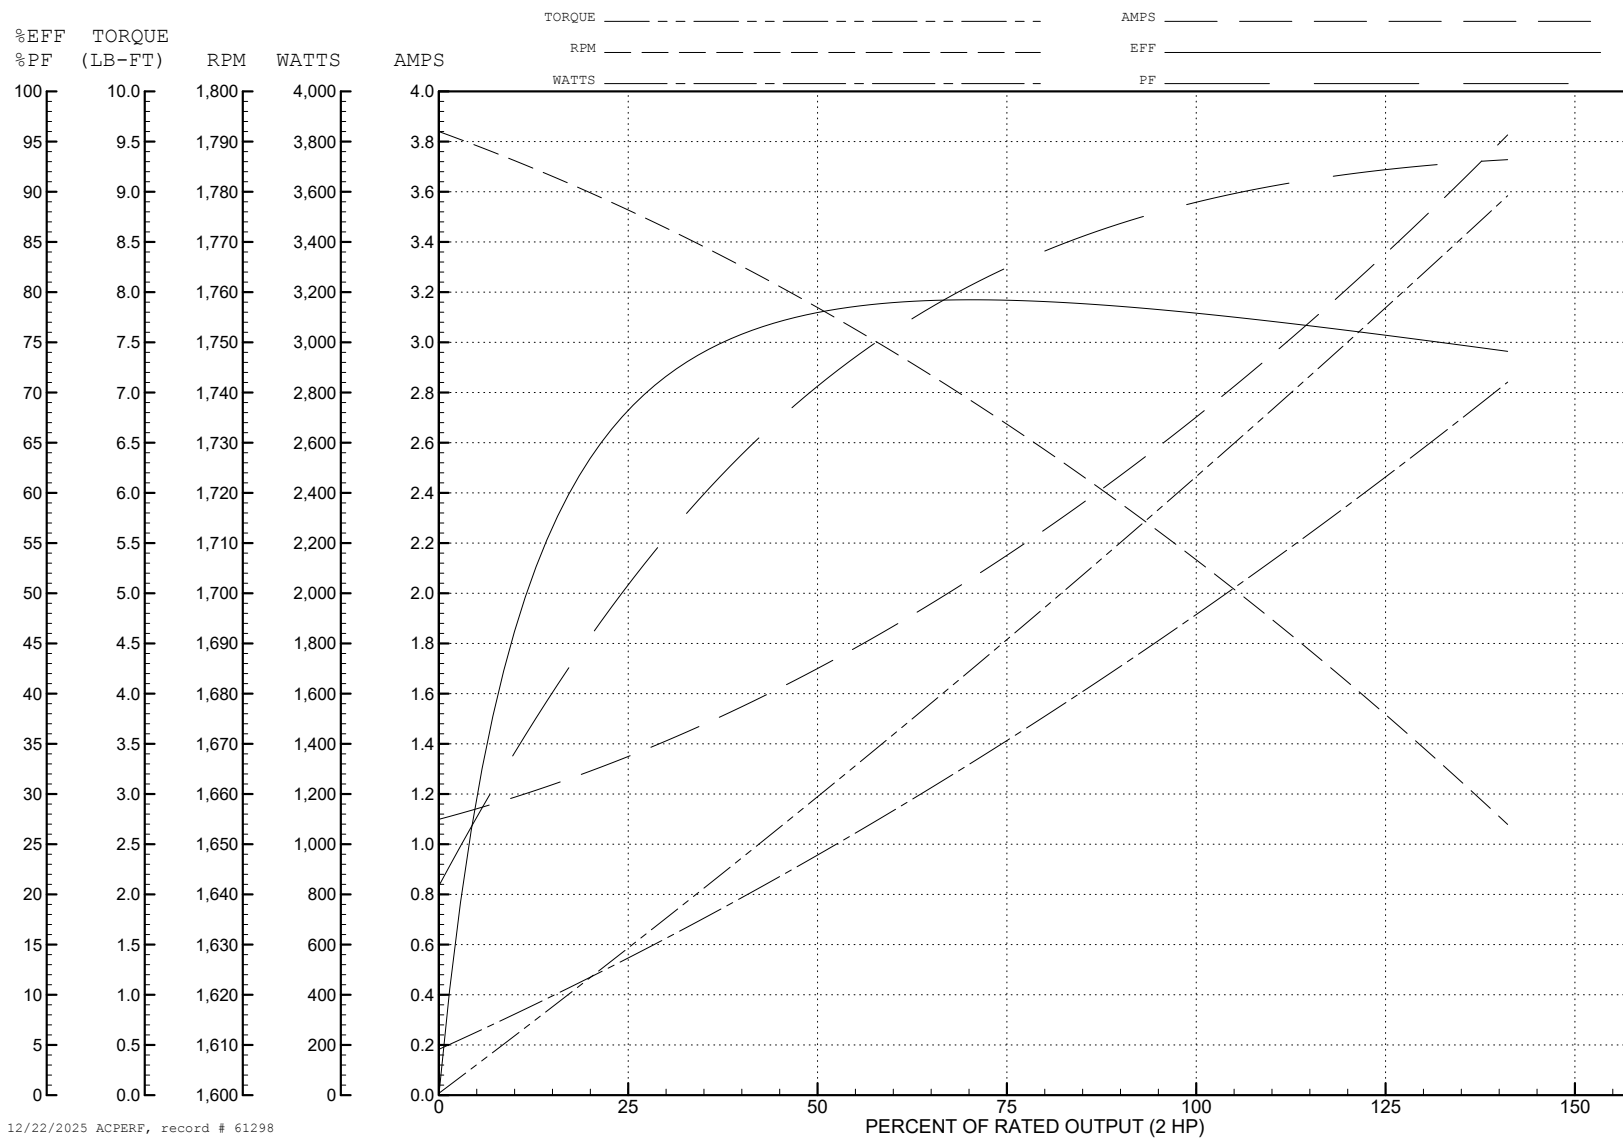

AC Induction Motor Performance Data

Record # 61299

Typical performance - not guaranteed values

Winding: 36WG3120-R002			Type: 3628M		Enclosure: TEFC			
Nameplate Data			460 V, 60 Hz: Low Speed Connection					
Rated Output (HP)		2/.89	Full Load Torque		4 LB-FT			
Volts		460	Start Configuration		direct on line			
Full Load Amps		3/1.6	Breakdown Torque		13 LB-FT			
R.P.M.		1725/1140	Pull-up Torque		8.2 LB-FT			
Hz	60	Phase	3	Locked-rotor Torque		8.7 LB-FT		
NEMA Design Code		B	KVA Code	F	Starting Current		8.9 A	
Service Factor (S.F.)		1.15	No-load Current		1.2 A			
NEMA Nom. Eff.		0	Power Factor		0	Line-line Res. @ 25°C		25.3 Ω
Rating - Duty		40C	AMB-CONT		Temp. Rise @ Rated Load		47°C	
S.F. Amps					Temp. Rise @ S.F. Load		53°C	
					Locked-rotor Power Factor		68.7	
					Rotor inertia		0.263 LB-FT2	

Load Characteristics 460 V, 60 Hz, 0.89 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	31	48	61	68	75	77	72
Efficiency	51.8	62.4	68.7	71.4	72.4	71.9	72
Speed	1190	1182	1172	1163	1151	1134	1156
Line amperes	1.3	1.4	1.5	1.7	1.9	2.2	1.82

ABB Motors and Mechanical Inc.

WINDING # 36WG3120

Typical performance - not guaranteed values.

0.89 HP 3 PH 60 HZ 1163 RPM 460 V 3628M

TORQUES (LB-FT): PO=13 PU=8.2 LR=8.7 LRA=8.9

