



Customer information packet

VJPFPM2547T

60//50HP, 1770//1470RPM, 3PH, 60//50HZ, 364J

Specifications

Enclosure	OPSB
Frame	364JP
Frame Material	Steel
Frequency	50.00 Hz 60.00 Hz
Motor Letter Type	Three Phase
Output @ Frequency	60.000 HP @ 60 HZ 50.000 HP @ 50 HZ
Phase	3
Synchronous Speed @ Frequency	1500 RPM @ 50 HZ
Voltage @ Frequency	190.0 V @ 50 HZ 230.0 V @ 60 HZ 380.0 V @ 50 HZ 460.0 V @ 60 HZ
Agency Approvals	CSA EEV UL
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	72.000 A @ 460.0 V 72.000 A @ 380.0 V 144.000 A @ 230.0 V 144.000 A @ 190.0 V
Design Code	B
Drip Cover	Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	93.6 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK

Part detail

Revision	H
Type	AC
Mech. spec.	42E338
Base	
Status	PRD/A
Elec. spec.	42WGW980
Layout	42LYE338
Eff. date	07-24-2023
CD Diagram	CD0104
Poles	04
Leads	12#8
Proprietary	False
Created date	12-10-2015

Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	72.0 a
Insulation Class	F
Inverter Code	Not Inverter
KVA Code	F
Lifting Lugs	Vertical Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	12 @ 8 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	4252M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	32.50 IN
Power Factor	84
Product Family	Fire Pump Motor
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Tapped & Key
Rodent Screen	Included
Service Factor	1.15
Shaft Diameter	2.125 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1470 rpm 1770 rpm
Speed Code	Single Speed
Starting Method	Wye Start - Delta Run
Thermal Device - Bearing	None

Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3454L															
CAT.NO.	VJPFPM2547T				CUST P/N				I.P.				23		
SPEC.	42E338W980H2				SER.NO.				FRAME				364JP		
HZ	60	HP	60		RPM	1770		HZ	50		HP	50		RPM	1470
VOLTS	230/460				CODE	F		VOLTS	190/380				CODE	F	
AMPS	144/72				DES	B		AMPS	144/72				DES	B	
EFF	93.6	SER.F.	1.15		PF	84		EFF	93		SER.F.	1.15		PF	84
RATING	40C AMB-CONT				DE BRG	6313				GREASE	POLYREX EM				
BLANK					ODE BRG	6311				MTR. WT.	486				
					CLASS	F		PH	3						
					ENCL	OPSB		CC	010A						
HTR-VOLTS	HTR-AMPS				HTR-WATTS										

AC Induction Motor Performance Data

Record # 54369

Typical performance - not guaranteed values

Winding: 42WGW980-R001		Type: 4252M	Enclosure: OPSB
Nameplate Data		460 V, 60 Hz: High Voltage Connection	
Rated Output (HP)	60//50	Full Load Torque	178 LB-FT
Volts	230/460//190/380	Start Configuration	direct on line
Full Load Amps	144/72	Breakdown Torque	489 LB-FT
R.P.M.	1770//1470	Pull-up Torque	222 LB-FT
Hz	60//50	Locked-rotor Torque	299 LB-FT
NEMA Design Code	B	Starting Current	406 A
Service Factor (S.F.)	1.15	No-load Current	26.6 A
NEMA Nom. Eff.	93.6	Line-line Res. @ 25°C	0.13192 Ω
Rating - Duty	40C AMB-CONT	Temp. Rise @ Rated Load	54°C
S.F. Amps		Temp. Rise @ S.F. Load	67°C
		Locked-rotor Power Factor	27.7

Load Characteristics 460 V, 60 Hz, 60 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	49	70	80	84	85	84	85
Efficiency	91.3	93.9	94.2	93.6	92.8	91.5	93.1
Speed	1794	1787.2	1780.6	1772.3	1764.4	1753	1768
Line amperes	31.4	42	56.1	71.8	89	109	82.1


ABB Motors and Mechanical Inc.

WINDING # 42WGW980

Typical performance - not guaranteed values.

60 HP 3 PH 60 HZ 1772.3 RPM 460 V 4252M

TORQUES (LB-FT) : PO=489 PU=222 LR=299 LRA=406

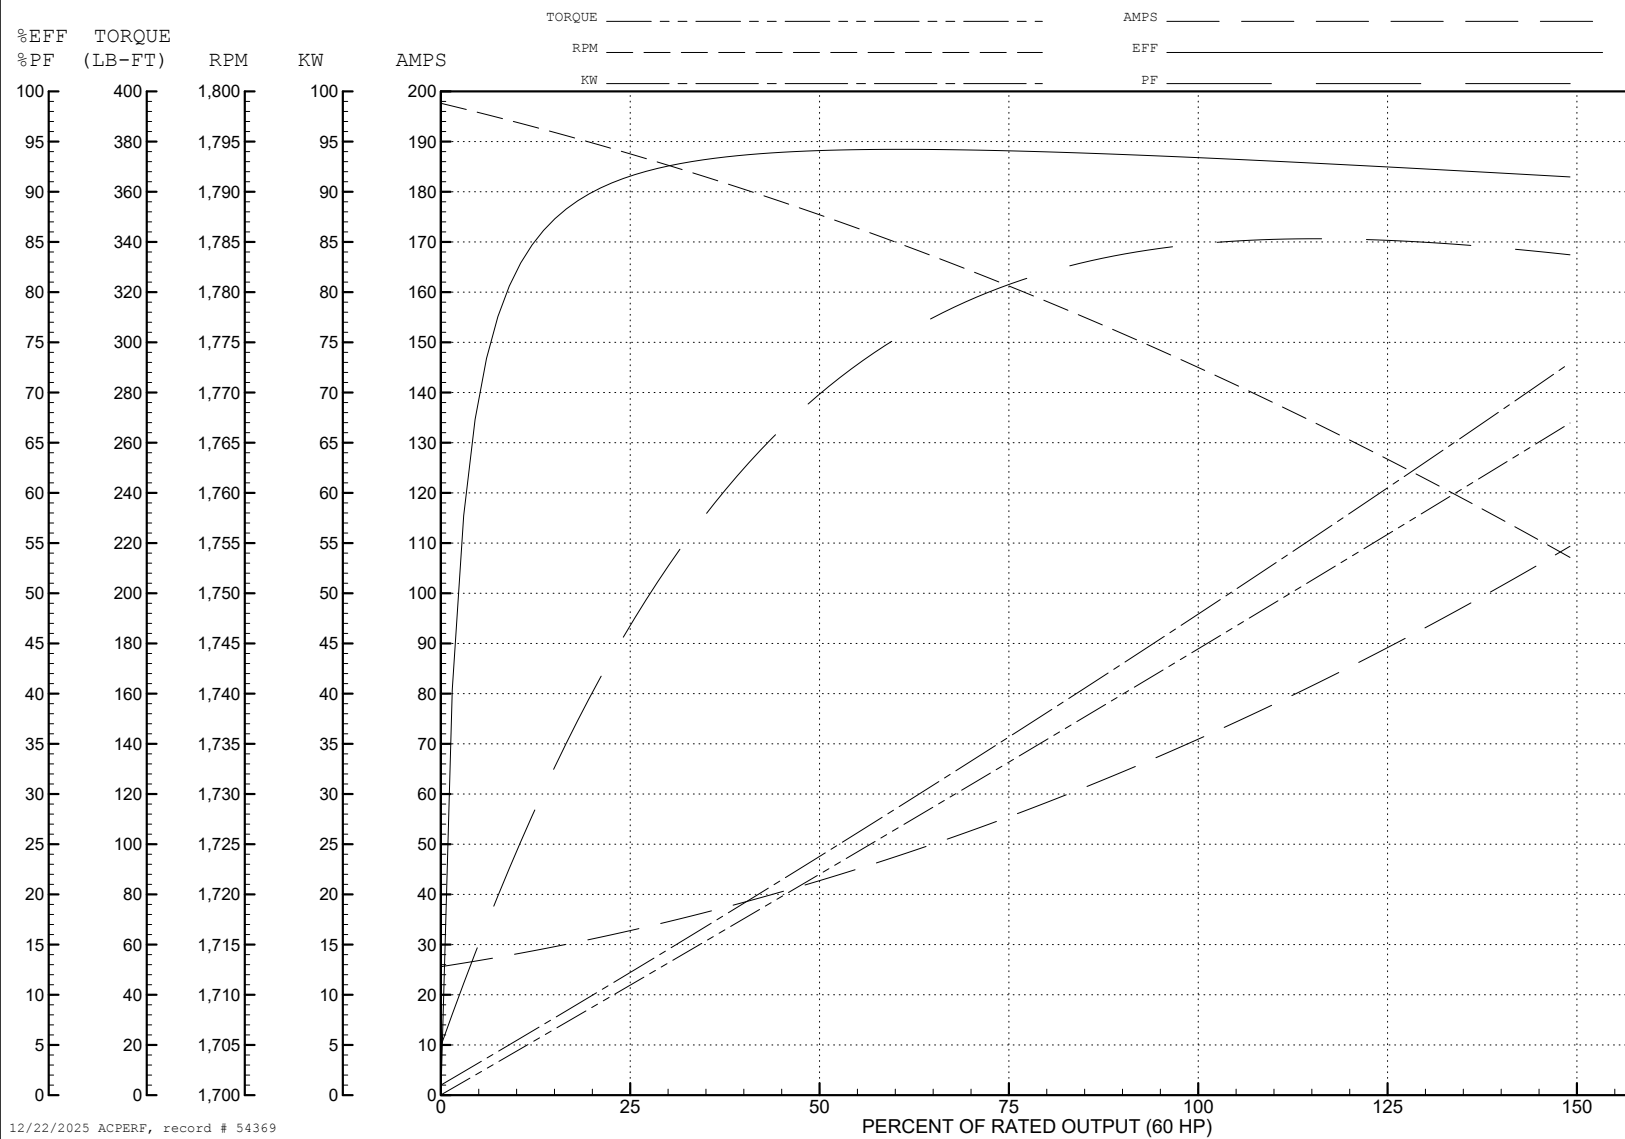

AC Induction Motor Performance Data

Record # 54370

Typical performance - not guaranteed values

Winding: 42WGW980-R001			Type: 4252M		Enclosure: OPSB			
Nameplate Data			380 V, 50 Hz: High Voltage Connection					
Rated Output (HP)		60//50	Full Load Torque		179 LB-FT			
Volts		230/460//190/380	Start Configuration		direct on line			
Full Load Amps		144/72	Breakdown Torque		472 LB-FT			
R.P.M.		1770//1470	Pull-up Torque		233 LB-FT			
Hz	60//50	Phase	3	Locked-rotor Torque		314 LB-FT		
NEMA Design Code		B	KVA Code	F	Starting Current		397 A	
Service Factor (S.F.)		1.15	No-load Current		25.7 A			
NEMA Nom. Eff.		93.6	Power Factor		83	Line-line Res. @ 25°C		0.13 Ω
Rating - Duty		40C	AMB-CONT		Temp. Rise @ Rated Load		55°C	
S.F. Amps			Temp. Rise @ S.F. Load		69°C			
			Locked-rotor Power Factor		30.9			
			Rotor inertia		6.93 LB-FT2			

Load Characteristics 380 V, 50 Hz, 50 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	51	72	81	85	86	84	86
Efficiency	90.8	93.3	93	93.1	91.7	90	92.3
Speed	1494	1487	1480	1472	1464	1453	1467
Line amperes	30.7	41.6	56.1	72.3	90.1	111	83

ABB Motors and Mechanical Inc.

WINDING # 42GW980

Typical performance - not guaranteed values.

50 HP 3 PH 50 HZ 1472 RPM 380 V 4252M

TORQUES (LB-FT): PO=472 PU=233 LR=314 LRA=397

