



Customer information packet

CCPX18326T

3HP, 3470//2890RPM, 3PH, 60HZ, 182TC, XPFC, F1

Class - CLI GP C,D; CLII GP E,F,G

Division - Division I

Specifications

Enclosure	XPFC
Frame	182TC
Frame Material	Iron
Frequency	50.00 Hz 60.00 Hz
Haz Area Class and Group	CLI GP C,D; CLII GP E,F,G
Haz Area Division	Division I
Motor Letter Type	Three Phase
Output @ Frequency	2.000 HP @ 50 HZ 3.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 190.0 V @ 50 HZ 460.0 V @ 60 HZ 380.0 V @ 50 HZ
Agency Approvals	UL CSA EEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	6
Current @ Voltage	7.600 A @ 230.0 V 6.400 A @ 190.0 V 3.800 A @ 460.0 V 3.200 A @ 380.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT

Part detail

Revision	E
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	06WGY471
Layout	06LYK422
Eff. date	05-02-2024
CD Diagram	CD0005
Poles	02
Leads	9#16
Proprietary	False
Created date	04-17-2019

Efficiency @ 100% Load	86.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Enclosure Modification	Severe Duty Features
Feedback Device	NO FEEDBACK
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	3.2 a
Insulation Class	F
Inverter Code	Not Inverter
IP Rating	IP55
KVA Code	K
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	5400 rpm
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0618M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	18.33 IN
Power Factor	89
Product Family	General Purpose
Pulley Face Code	C-Face
Rodent Screen	None
RoHS Status	ROHS NON-COMPLIANT
Service Factor	1.00
Shaft Diameter	1.125 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Speed	3470 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat

Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP2033XPSLEV												
NO.						CC	010A					
S/N						TEMP CODE		T3C				
SPEC.	06-0000-0105					INV.TYPE		PWM				
CAT.NO.	CCPX18326T					C HP FR	60	C HP TO	90			
HP	3//2					CT HZ FROM		6	CT HZ TO		60	
VOLTS	230/460//190/380					VT HZ FROM		6	VT HZ TO		60	
AMPS	7.6/3.8//6.4/3.2					MAG CUR	3.2/1.6					
RPM	3470//2890					MX RPM	5400					
HZ	60//50	PH	3	CL	B	NOM.EFF.	86.5					
SER.F.	1.00	DES	B	SL HZ		WK2		0.079				
FRAME	182TC	RATING		40C AMB-CONT								
BLANK	1.15 SF SINEWAVE											
	55C AMB @ 1.0 SF					NEMA MG-1 PT 5,IP55						

AC Induction Motor Performance Data

Record # 69211

Typical performance - not guaranteed values

Winding: 06WGY471-R002			Type: 0618M		Enclosure: TEFC		
Nameplate Data			460 V, 60 Hz: High Voltage Connection				
Rated Output (HP)		3//2	Full Load Torque		4.51 LB-FT		
Volts		230/460//190/380	Start Configuration		direct on line		
Full Load Amps		7.6/3.8//6.4/3.2	Breakdown Torque		25.5 LB-FT		
R.P.M.		3470//2890	Pull-up Torque		9.08 LB-FT		
Hz		60//50	Phase		3	Locked-rotor Torque	11.9 LB-FT
NEMA Design Code		B	KVA Code		K	Starting Current	29.3 A
Service Factor (S.F.)					1	No-load Current	1.64 A
NEMA Nom. Eff.		86.5	Power Factor		89	Line-line Res. @ 25°C	6.24 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		45°C	
S.F. Amps				Temp. Rise @ S.F. Load		56°C	
				Locked-rotor Power Factor		59.2	
				Rotor inertia		0.0795 LB-FT ²	

Load Characteristics 460 V, 60 Hz, 3 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	47	70	81	87	90	91
Efficiency	81.1	86.6	87.4	86.6	85.2	83.1
Speed	3568	3538	3505	3468	3430	3382
Line amperes	1.82	2.29	2.94	3.71	4.53	5.5


ABB Motors and Mechanical Inc.

WINDING # 06WGY471

Typical performance - not guaranteed values.

3 HP 3 PH 60 HZ 3468 RPM 460 V 0618M

TORQUES (LB-FT): PO=25.5 PU=9.08 LR=11.9 LRA=29.3

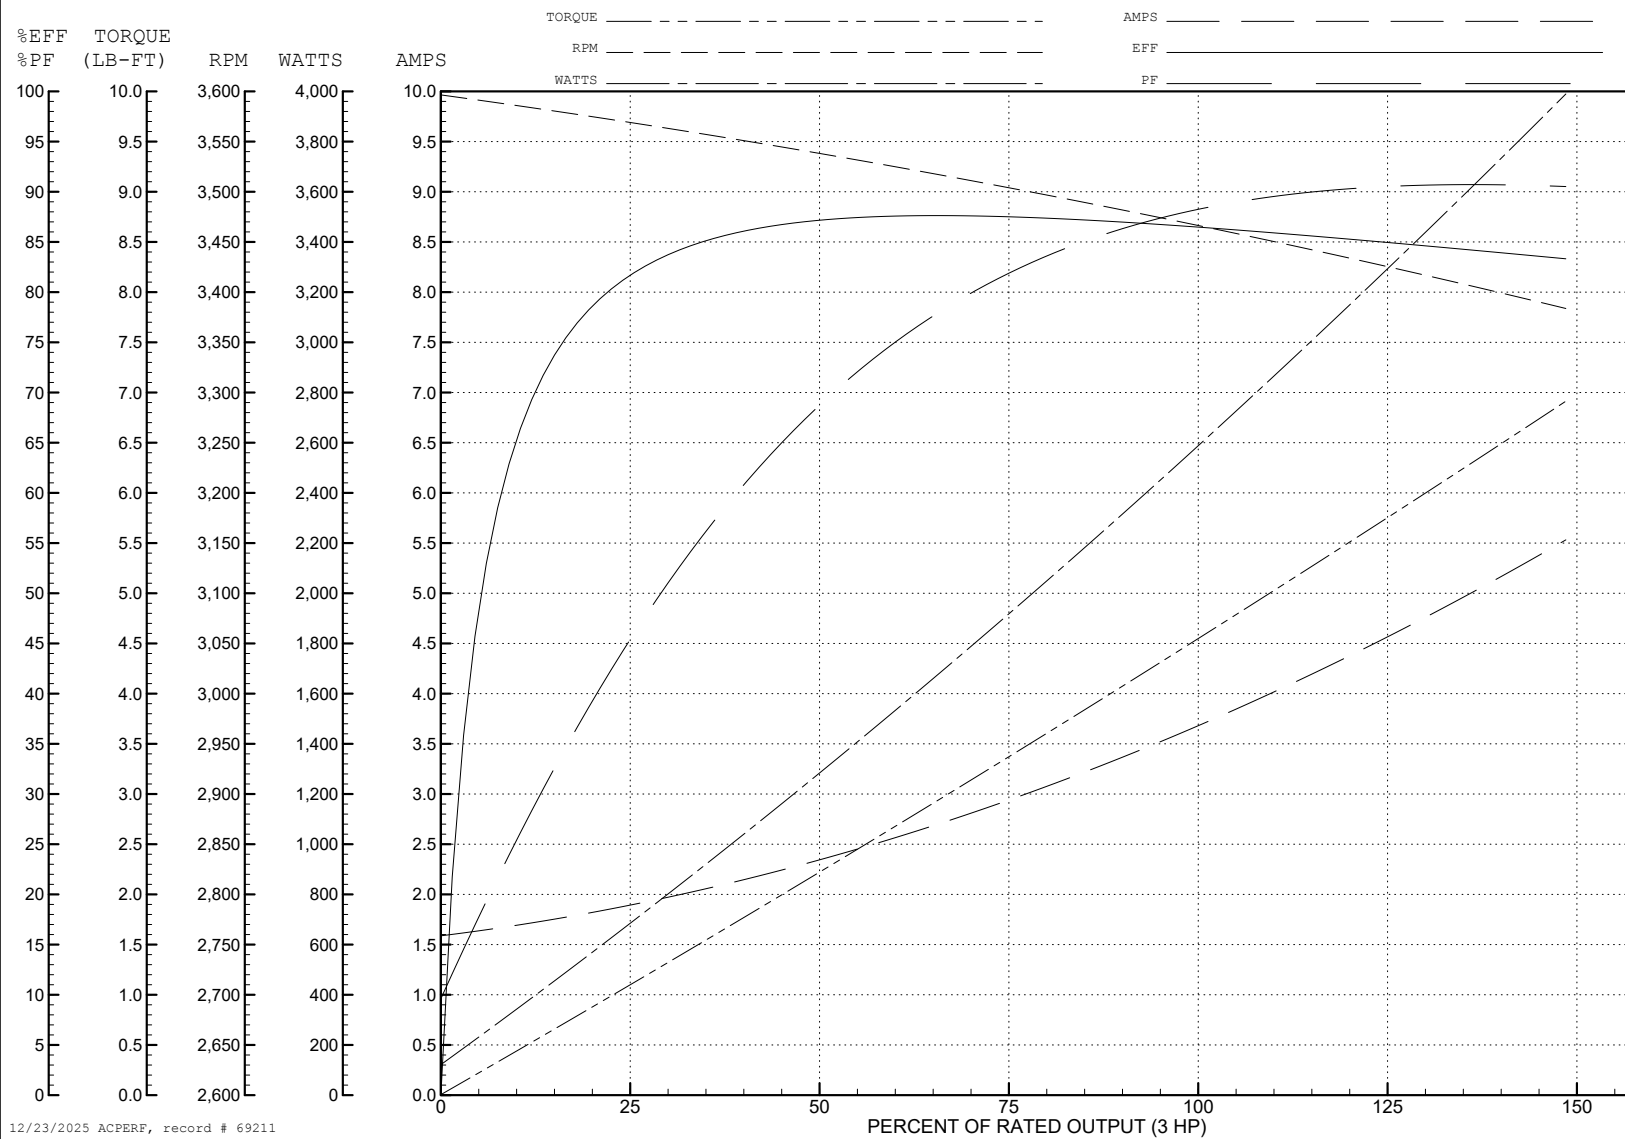

AC Induction Motor Performance Data

Record # 69212

Typical performance - not guaranteed values

Winding: 06WGY471-R002			Type: 0618M		Enclosure: TEFC			
Nameplate Data				380 V, 50 Hz: High Voltage Connection				
Rated Output (HP)		3//2		Full Load Torque		3.61 LB-FT		
Volts		230/460//190/380		Start Configuration		direct on line		
Full Load Amps		7.6/3.8//6.4/3.2		Breakdown Torque		23.13 LB-FT		
R.P.M.		3470//2890		Pull-up Torque		9.15 LB-FT		
Hz		60//50	Phase	3	Locked-rotor Torque		11.99 LB-FT	
NEMA Design Code		B		KVA Code	K	Starting Current		27.03 A
Service Factor (S.F.)		1		No-load Current		1.6 A		
NEMA Nom. Eff.		86.5	Power Factor	89	Line-line Res. @ 25°C		6.24 Ω	
Rating - Duty		40C		AMB-CONT		Temp. Rise @ Rated Load		36°C
S.F. Amps						Temp. Rise @ S.F. Load		43°C
						Locked-rotor Power Factor		65.7
						Rotor inertia		0.0795 LB-FT2

Load Characteristics 380 V, 50 Hz, 2 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	44	65	78	84	88	90
Efficiency	73.4	81.5	84.1	84.1	83.2	81.7
Speed	2972	2947	2921	2890	2860	2821
Line amperes	1.73	2.09	2.58	3.18	3.82	4.57


ABB Motors and Mechanical Inc.


WINDING # 06WGY471

Typical performance - not guaranteed values.

2 HP 3 PH 50 HZ 2890 RPM 380 V 0618M

TORQUES (LB-FT): PO=23.13 PU=9.15 LR=11.99 LRA=27.03

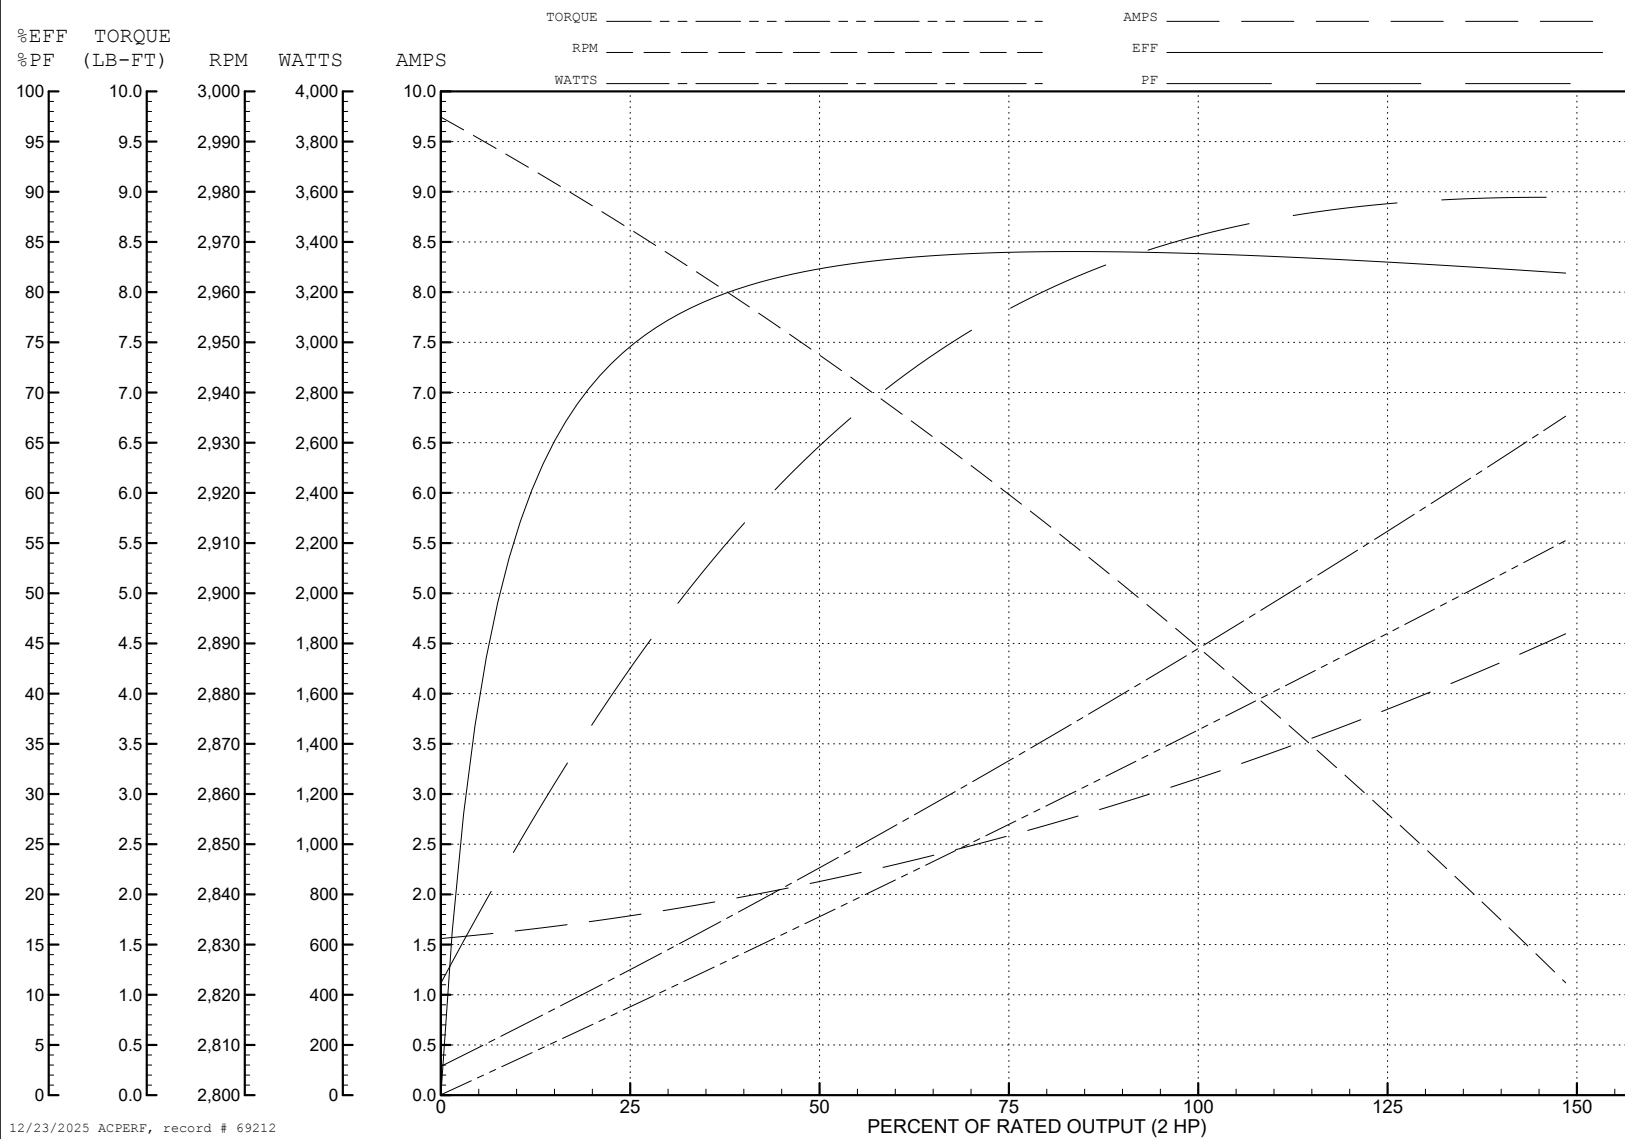

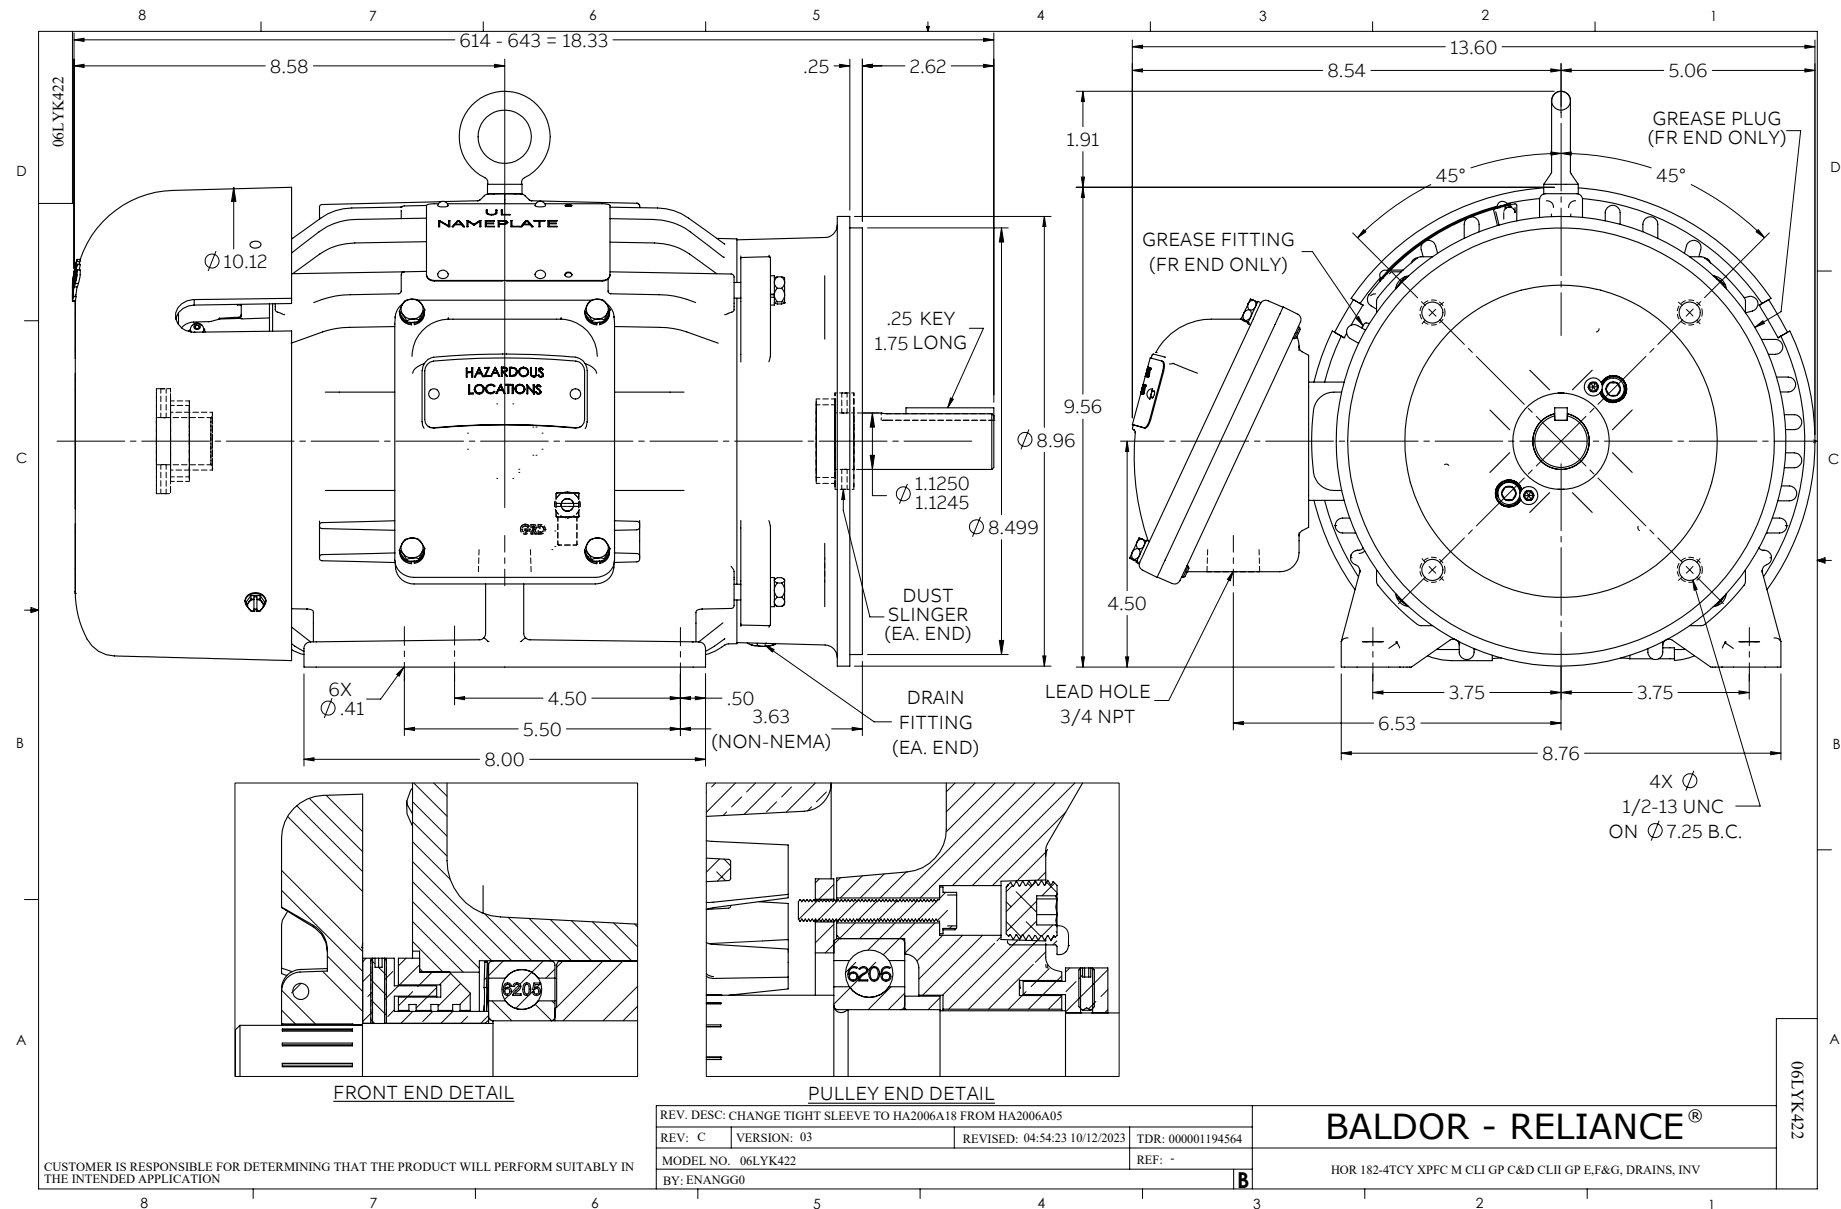

CD0005



- NOTES:
- 1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
 - 2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
 - 3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
 - 4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
S00000		FILE: AAA00005140	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS

CD0005