



Customer information packet

CCPX21726T

7.5HP, 3510//2910RPM, 3PH, 60HZ, 213TCY, XPFC

Class - CLI GP C,D; CLII GP E,F,G

Division - Division I

Specifications

Enclosure	XPFC
Frame	213TCY
Frame Material	Iron
Frequency	50.00 Hz 60.00 Hz
Haz Area Class and Group	CLI GP C,D; CLII GP E,F,G
Haz Area Division	Division I
Motor Letter Type	Three Phase
Output @ Frequency	5.000 HP @ 50 HZ 7.500 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 190.0 V @ 50 HZ 460.0 V @ 60 HZ 380.0 V @ 50 HZ
Agency Approvals	UL CSA EEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	6
Current @ Voltage	9.000 A @ 460.0 V 7.600 A @ 380.0 V 18.000 A @ 230.0 V 15.200 A @ 190.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT

Part detail

Revision	C
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	07WGY328
Layout	07LY-000-074
Eff. date	04-13-2021
CD Diagram	CD0005
Poles	02
Leads	9#14
Proprietary	False
Created date	05-08-2019

Efficiency @ 100% Load	90.7 %
Electrically Isolated Bearing	Not Electrically Isolated
Enclosure Modification	Severe Duty Features
Feedback Device	NO FEEDBACK
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	7.6 a
Insulation Class	F
Inverter Code	Inverter Duty
IP Rating	IP55
KVA Code	H
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	5400 rpm
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0726M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	20.77 IN
Power Factor	87
Product Family	General Purpose
Pulley Face Code	C-Face
Rodent Screen	None
RoHS Status	ROHS NON-COMPLIANT
Service Factor	1.00
Shaft Diameter	1.375 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Speed	3510 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat

Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP2033XPSLEV												
NO.						CC	010A					
S/N						TEMP CODE			T3C			
SPEC.	07-0000-0108					INV.TYPE		PWM				
CAT.NO.	CCPX21726T					C HP FR	60		C HP TO	90		
HP	7.5//5					CT HZ FROM		6		CT HZ TO		60
VOLTS	230/460//190/380					VT HZ FROM		6		VT HZ TO		60
AMPS	18/9//15.2/7.6				MAG CUR	9.2/4.6						
RPM	3510//2910				MX RPM	5400						
HZ	60//50		PH	3	CL	F	NOM.EFF.		90.7			
SER.F.	1.00		DES	B	SL HZ	1.5		WK2	0.25			
FRAME	213TCY		RATING		40C AMB-CONT							
BLANK	55C AMB @ 1.0 SF											
	1.15 SF ON SINEWAVE					NEMA MG-1 PT 5,IP55						

AC Induction Motor Performance Data

Record # 74891

Typical performance - not guaranteed values

Winding: 07WGY328		Type: 0726M	Enclosure: XPFC		
Nameplate Data		380 V, 50 Hz: High Voltage Connection			
Rated Output (HP)	7.5//5	Full Load Torque	8.95 LB-FT		
Volts	230/460//190/380	Start Configuration	direct on line		
Full Load Amps	18/9//15.2/7.6	Breakdown Torque	36.93 LB-FT		
R.P.M.	3510//2910	Pull-up Torque	21.54 LB-FT		
Hz	60//50	Phase	3	Locked-rotor Torque	24.82 LB-FT
NEMA Design Code	B	KVA Code	H	Starting Current	59.17 A
Service Factor (S.F.)			1	No-load Current	3.44 A
NEMA Nom. Eff.	90.7	Power Factor	87	Line-line Res. @ 25°C	1.19 Ω
Rating - Duty	40C	AMB-CONT		Temp. Rise @ Rated Load	34°C
				Locked-rotor Power Factor	38.2
				Rotor inertia	0.237 lb-ft²

Load Characteristics 380 V, 50 Hz, 5 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	48	69	78	84	88	88
Efficiency	76.9	85.1	87.4	88.3	87.7	86.8
Speed	2983	2966	2947	2928	2906	2882
Line amperes	3.83	4.82	6.18	7.62	9.17	11.03


ABB Motors and Mechanical Inc.

WINDING # 07WGY328

Typical performance - not guaranteed values.

5 HP 3 PH 50 HZ 2928 RPM 380 V 0726M

TORQUES (LB-FT) : PO=36.93 PU=21.54 LR=24.82 LRA=59.17

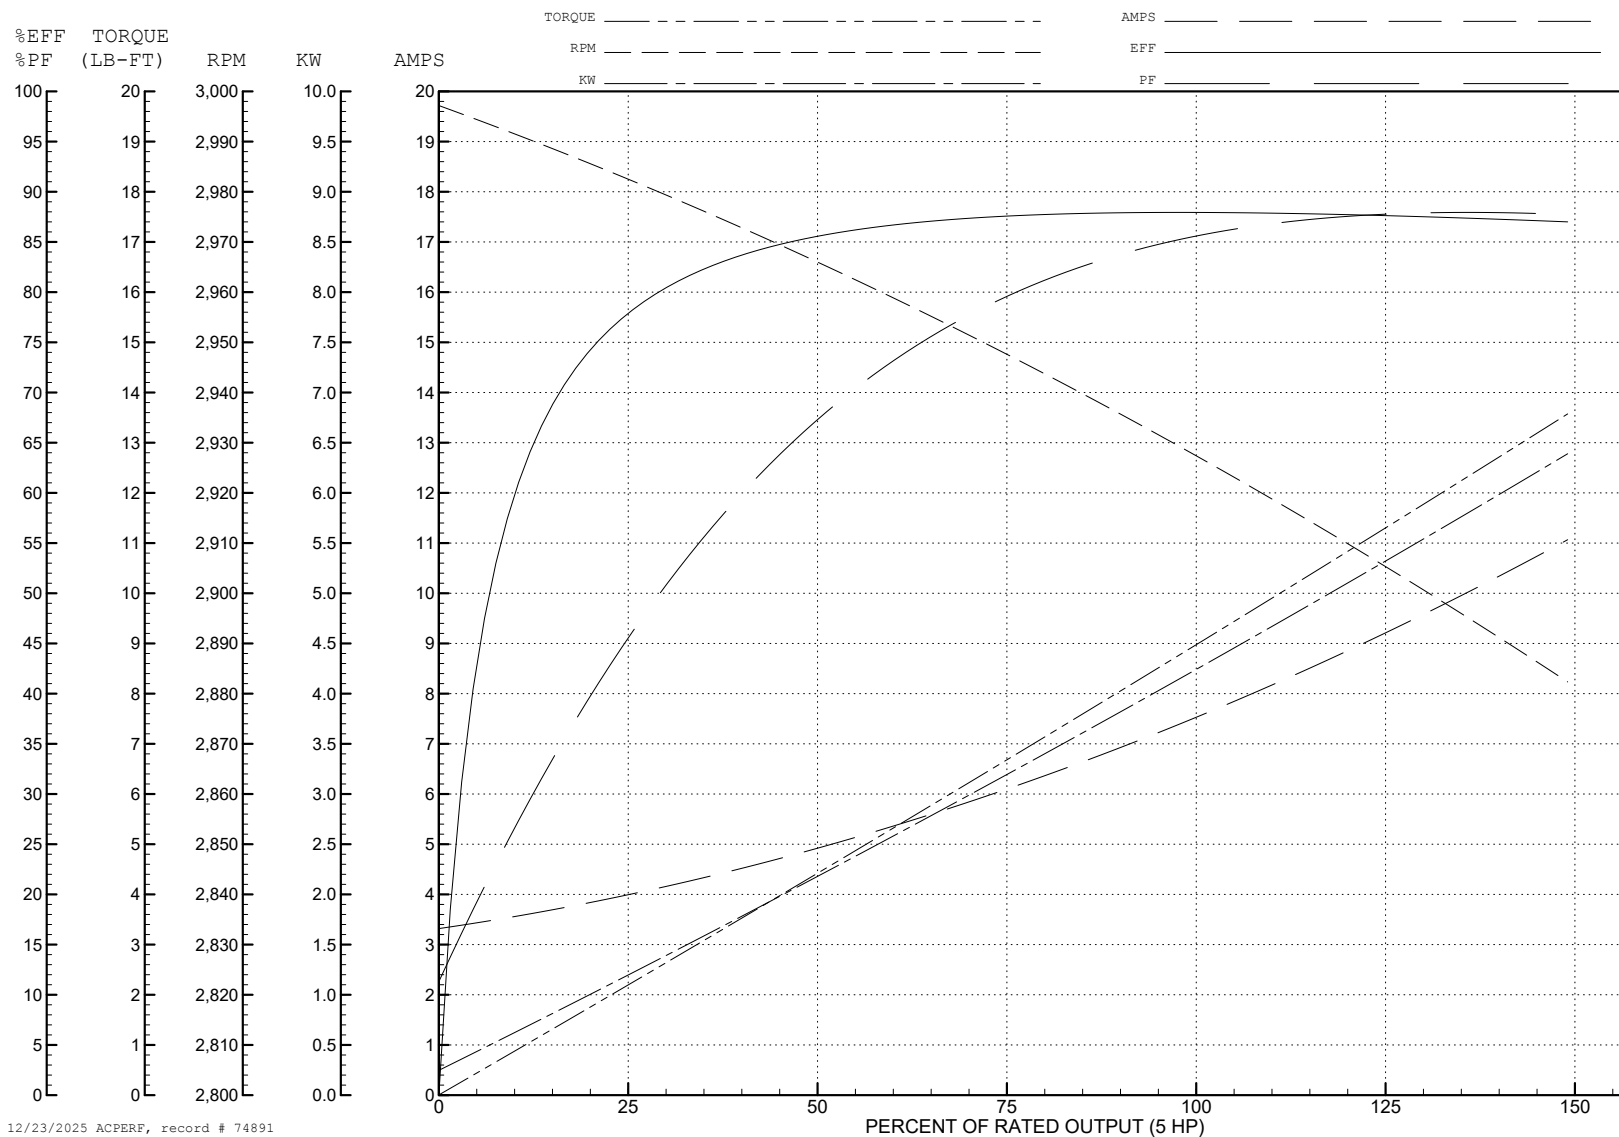

AC Induction Motor Performance Data

Record # 74892

Typical performance - not guaranteed values

Winding: 07WGY328		Type: 0726M	Enclosure: XPFC	
Nameplate Data			460 V, 60 Hz: High Voltage Connection	
Rated Output (HP)	7.5//5		Full Load Torque	11.2 LB-FT
Volts	230/460//190/380		Start Configuration	direct on line
Full Load Amps	18/9//15.2/7.6		Breakdown Torque	38.8 LB-FT
R.P.M.	3510//2910		Pull-up Torque	20.4 LB-FT
Hz	60//50	Phase 3	Locked-rotor Torque	23.5 LB-FT
NEMA Design Code	B	KVA Code H	Starting Current	61.1 A
Service Factor (S.F.)	1		No-load Current	3.54 A
NEMA Nom. Eff.	90.7	Power Factor 87	Line-line Res. @ 25°C	1.19 Ω
Rating - Duty	40C	AMB-CONT	Temp. Rise @ Rated Load	44°C
S.F. Amps			Temp. Rise @ S.F. Load	54°C
			Locked-rotor Power Factor	33.8
			Rotor inertia	0.237 LB-FT ²

Load Characteristics 460 V, 60 Hz, 7.5 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	52	74	82	87	90	89
Efficiency	83.7	89.3	90.4	90.7	89.5	88.2
Speed	3581	3559	3537	3512	3486	3456
Line amperes	4.04	5.31	7.04	8.9	10.9	13.3


ABB Motors and Mechanical Inc.


WINDING # 07WGY328

Typical performance - not guaranteed values.



7.5 HP 3 PH 60 HZ 3512 RPM 460 V 0726M

TORQUES (LB-FT): PO=38.8 PU=20.4 LR=23.5 LRA=61.1

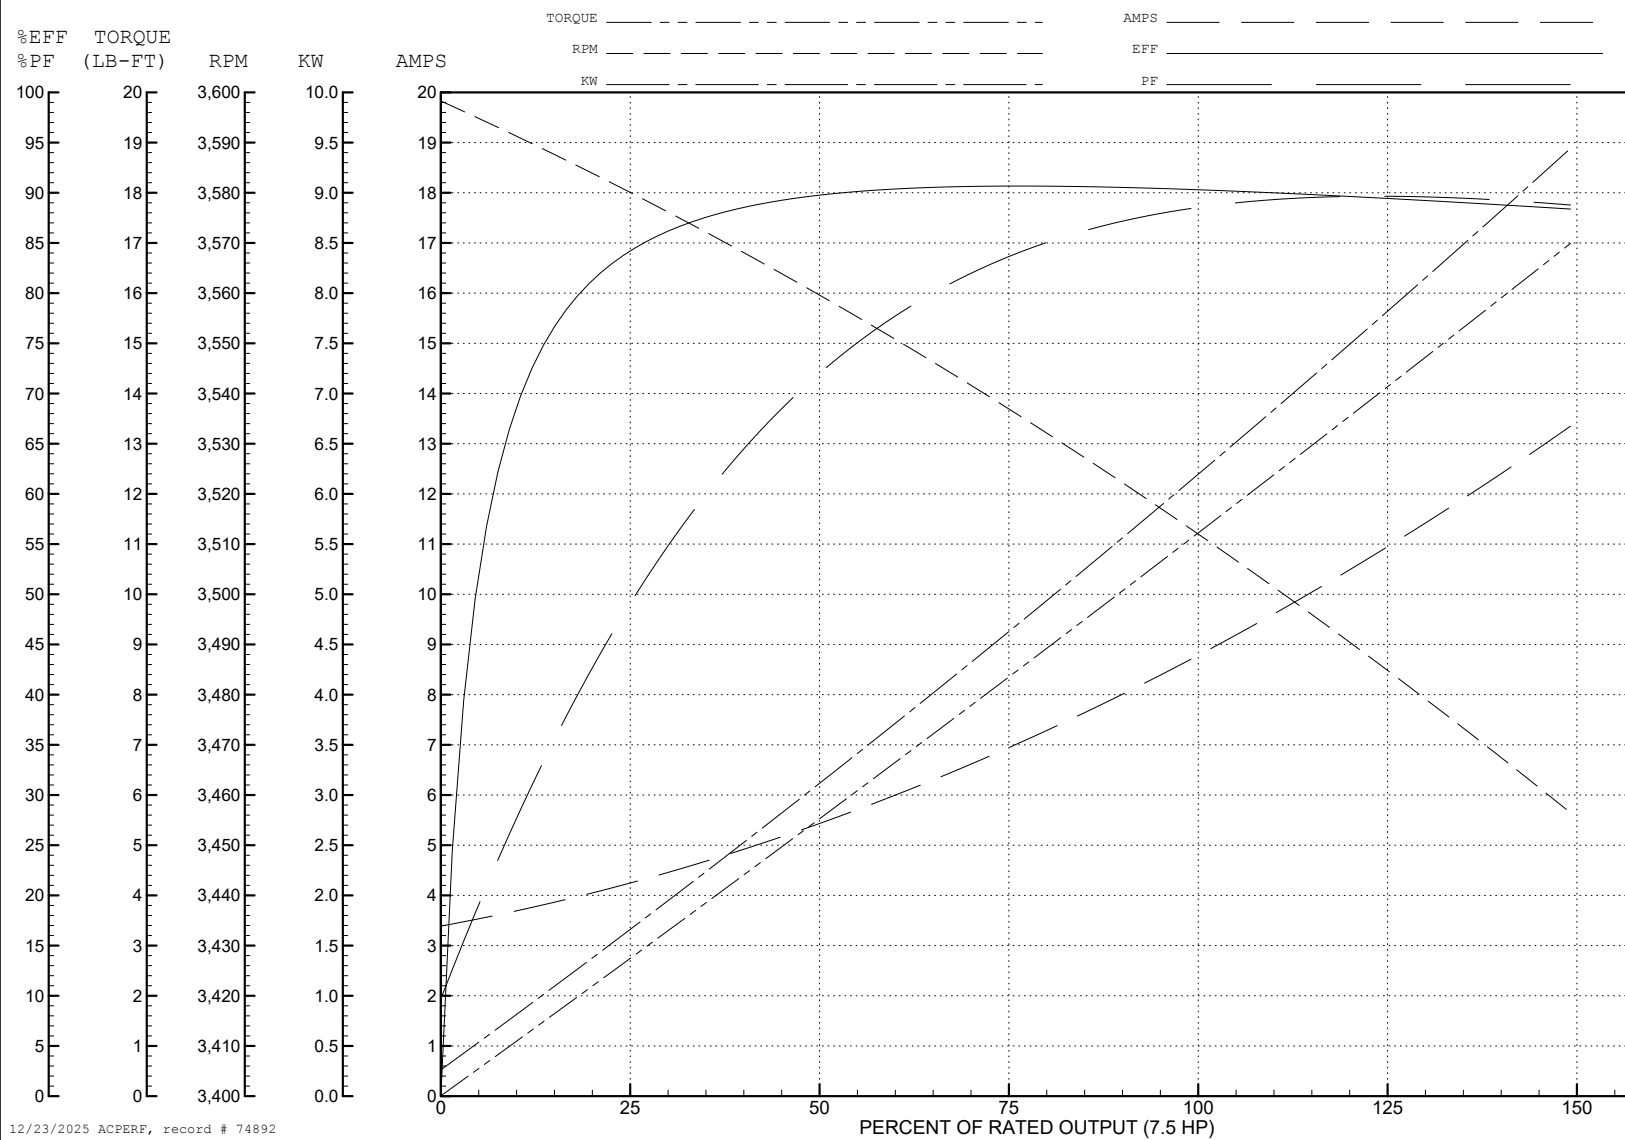


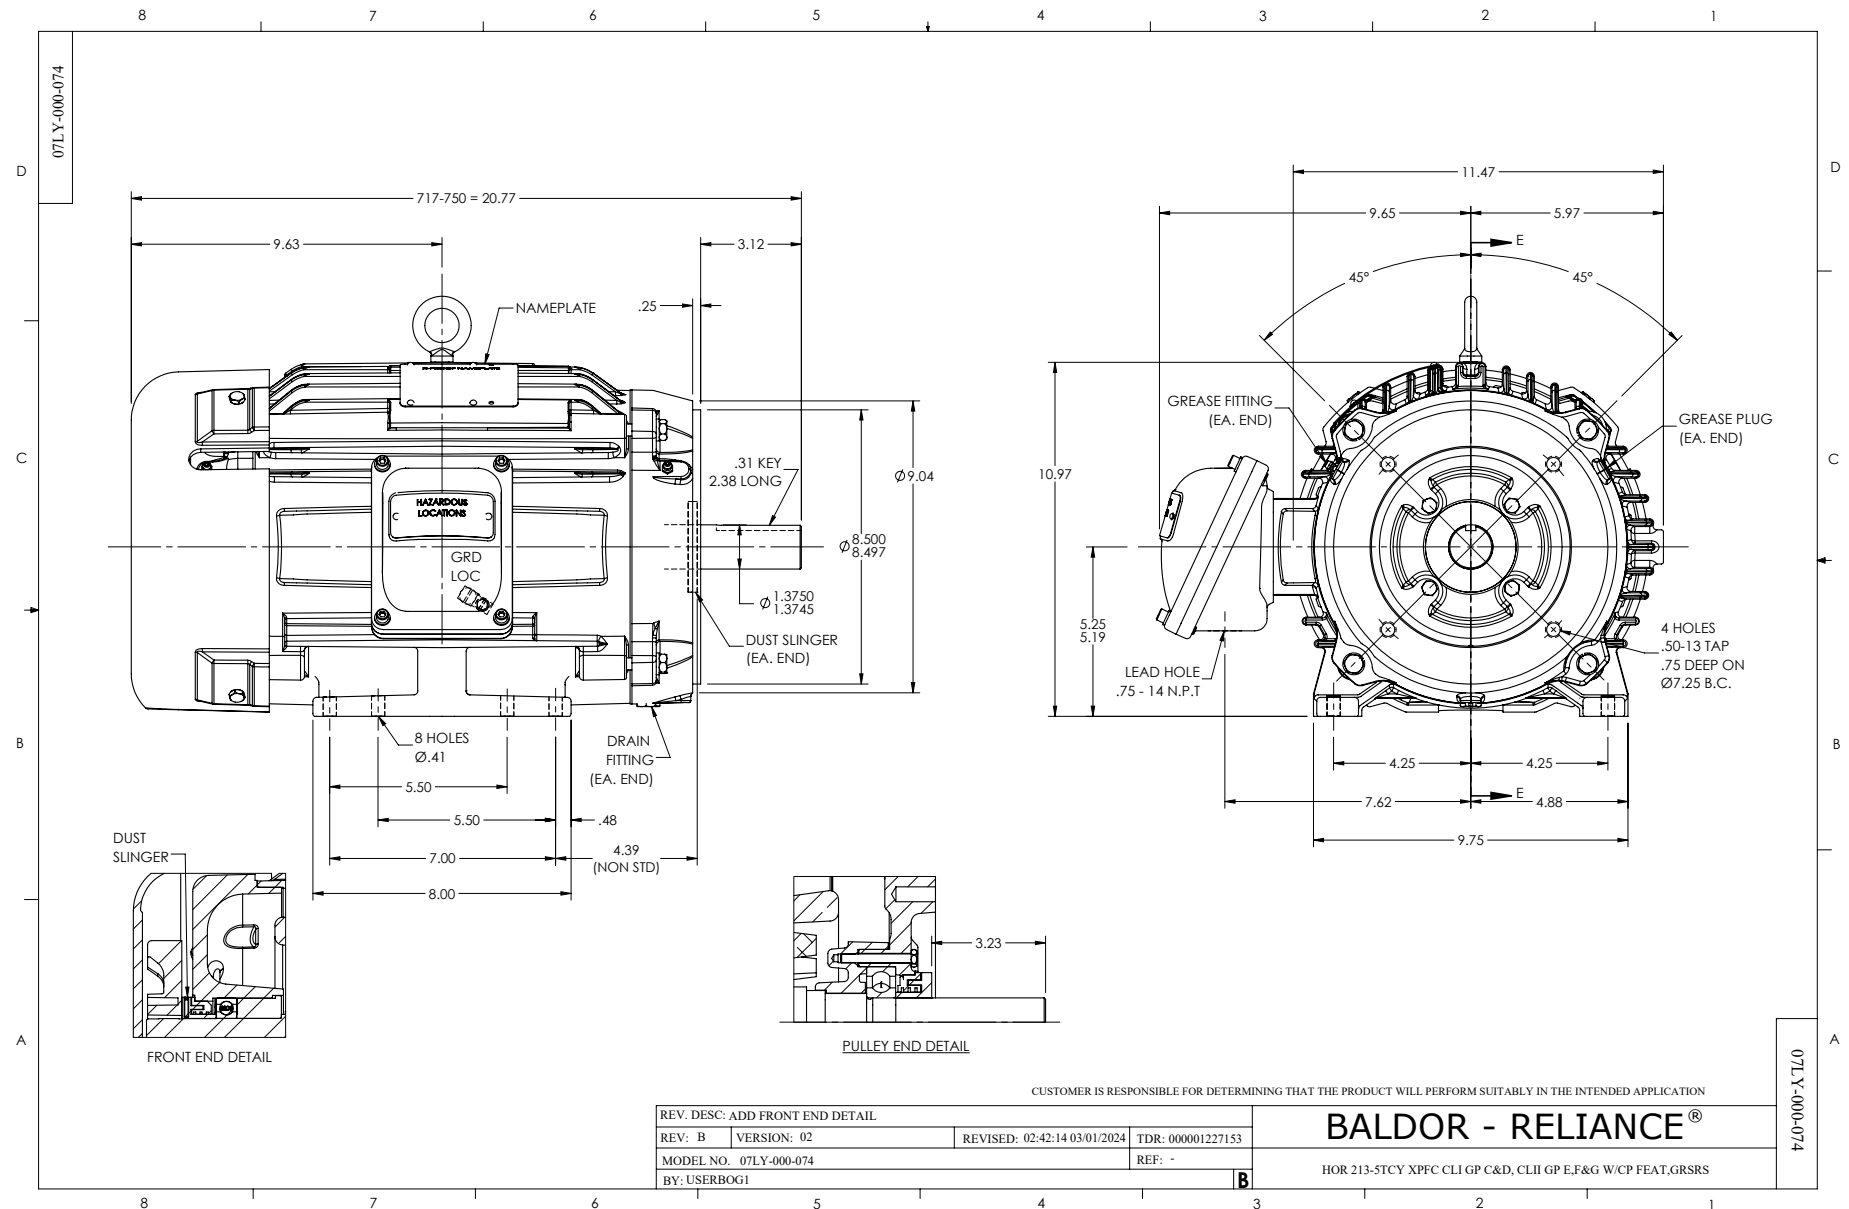

CD0005

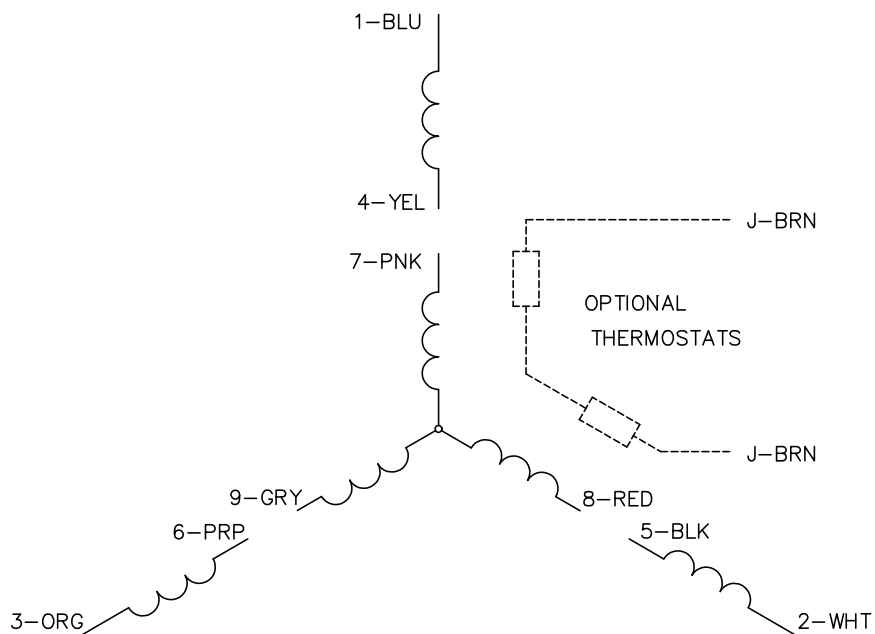LOW VOLTAGE
(2Y)

LINE

HIGH VOLTAGE
(1Y)

LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS

REV. LTR: E

BY: JLP

REVISED: 01/19/99 10:15

TDR: 0171435

S00000

FILE: AAA00005140

MDL: -

MTL: -

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS

CD0005