



Customer information packet

CCPX36626T

60HP, 3560RPM, 3PH, 60HZ, 364TSC, TEFC, F1

Class - CLI GP C,D; CLII GP E,F,G

Division - Division I

Specifications

Enclosure	TEFC
Frame	364TSC
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CLI GP C,D; CLII GP E,F,G
Haz Area Division	Division I
Motor Letter Type	Three Phase
Output @ Frequency	60.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	CCSAUSEEV CSA UL
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Constant Torque Speed Range	6-60
Current @ Voltage	65.100 A @ 460.0 V 130.000 A @ 230.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	93.6 %
Enclosure Modification	Severe Duty Features
Feedback Device	NO FEEDBACK
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	65.1 a
Insulation Class	F

Part detail

Revision	A
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	A36WG1558
Layout	617428-245
Eff. date	04-25-2019
CD Diagram	416820-002
Poles	02
Leads	3#4,6#6
Proprietary	False
Created date	04-16-2019

Inverter Code	Inverter Ready
IP Rating	IP55
KVA Code	G
Lifting Lugs	Standard Lifting Lugs
Max Speed	4200 rpm
Motor Lead Quantity/Wire Size	3 @ 4 AWG
Motor Standards	NEMA
Motor Type	A36056M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	31.36 IN
Power Factor	91
Product Family	General Industrial
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Service Factor	1.00
Shaft Diameter	1.875 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	3560 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat

Nameplate

NP2496L	
MOBIL POLYREX EM	

000692000FX


000613006PC		
CLASS I GROUP	C D X	NO.
CLASS II GROUP	E F G	
OPERATING TEMP CODE	T3C	

000901002AAA	
SUITABLE FOR 55C AMB AT 1.00 S	F AT SINEWAVE

NP3140L

SPEC NO.	A36-7812-1558				CAT.NO.	CCPX36626T					FRAME	364TSC
HP	60	VOLTS	230/460			PHASE	3	DESIGN	B	TYPE	P	
RPM	3560	AMPS	130/65.1			HZ	60	AMB	40	SF	1.00	
DRIVE END BEARING	65BC03J30X			DUTY	CONT	INSUL.CLASS			F			
OPP D.E. BEARING	65BC03J30X			ENCL	TEFC	CODE	G					
SF	1.15	WK2	6.7	MAG CUR	28.6/14.3			RPM MAX	4200			
CT HZ	6-60	VT HZ	6-60	CHP HZ	60-70			NEMA-NOM-EFF		93.6		
	IP66											
SER.NO.					MOTOR WEIGHT							

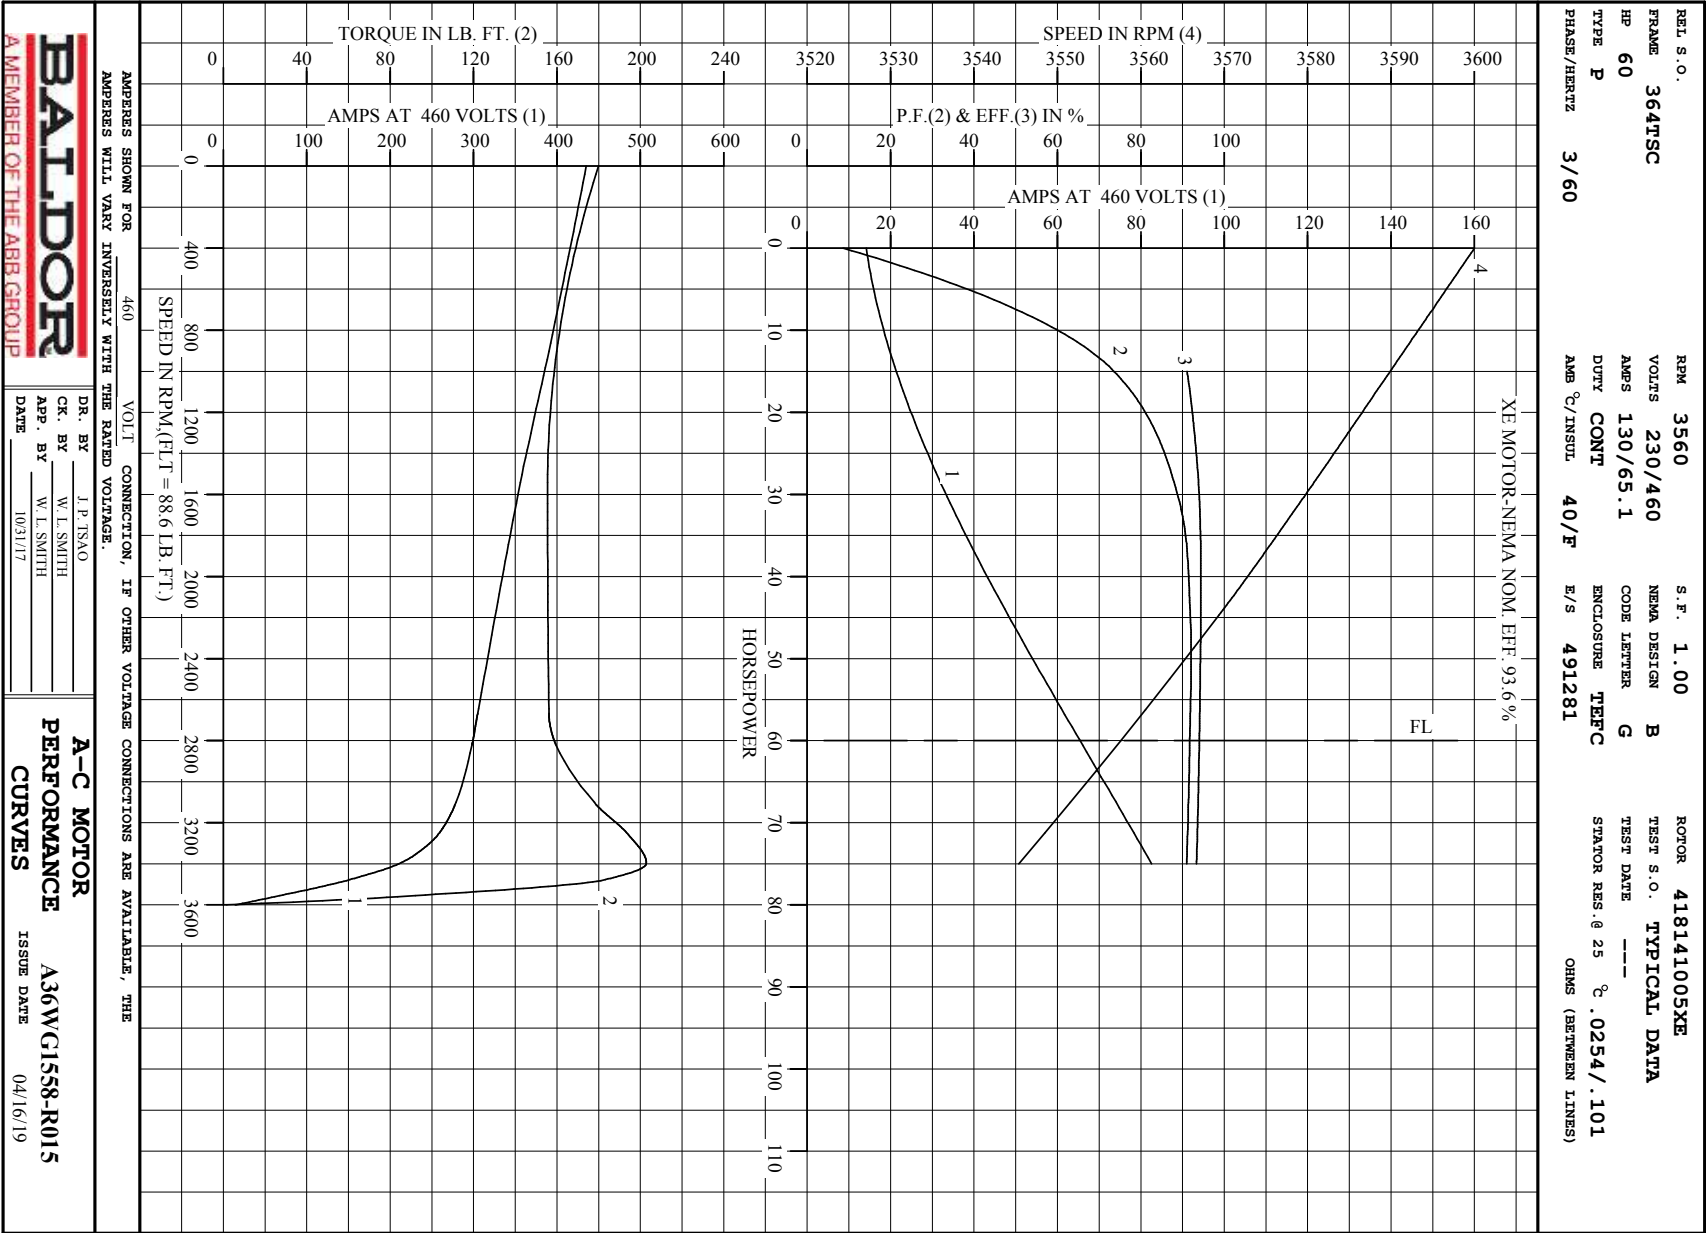REL. S.O.	FRAME	HP	TYPE	PHASE/ HERTZ	RPM	VOLTS
	364TSC	60	P	3/60	3560	230/460
AMPS	DUTY	AMB °C/ INSUL.	S.F.	NEMA DESIGN	CODE LETTER	ENCL.
130/65.1	CONT	40/F	1.00	B	G	TEFC
E/S	ROTOR	TEST S.O.	TEST DATE	STATOR RES. @25 °C OHMS (BETWEEN LINES)		
491281	418141005XE	---	---	.0254/.101		
PERFORMANCE						
LOAD	HP	AMPERES	RPM	% POWER FACTOR	% EFFICIENCY	
NO LOAD	0	14.3	3600	8.61	0	
1/4	15.0	21.0	3590	73.6	91.1	
2/4	30.0	33.7	3580	88.8	94.0	
3/4	45.0	48.6	3569	91.9	94.4	
4/4	60.0	65.1	3558	91.7	94.0	
5/4	75.0	82.7	3545	91.0	93.4	
SPEED TORQUE						
	RPM	TORQUE % FULL LOAD	TORQUE LB.-FT.	AMPERES		
LOCKED ROTOR	0	203	180	435		
PULL UP	1565	176	156	355		
BREAKDOWN	3397	229	203	212		
FULL LOAD	3558	100	88.6	65.1		
AMPERES SHOWN FOR 460. VOLT CONNECTION. IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE						
REMARKS: TYPICAL DATA XE MOTOR-NEMA NOM. EFF. 93.6 %						
 A MEMBER OF THE ABB GROUP				DR. BY J. P. TSAO CK. BY W. I. SMITH APP. BY W. I. SMITH DATE 10/31/17		
A-C MOTOR PERFORMANCE DATA				A36WG1558-R015 ISSUE DATE 04/16/19		



REL. S.O. 364TSC

HP 60

TYPE P

PHASE/HERTZ 3/60

RPM 3560

VOLTS 230/460

AMPS 130/65.1

DUTY CONT

AMB °C/INSUL 40/F

S.F. 1.00

NEMA DESIGN B

CODE LETTER G

ENCLOSURE TEFC

E/S 491281

ROTOR 418141005XE

TEST S.O. TYPICAL DATA

TEST DATE ---

STATOR RES @ 25 °C. 0254/.101

OHMS (BETWEEN LINES)

10.00

9

8

7

6

5

4

3

2

1.00

9

8

7

6

5

4

3

2

1

0

ACCELERATION

OVERLOAD

LOCKED-ROTOR, 40 C

LOCKED-ROTOR

TIME IN SEC.

1000

800

600

400

200

0

% FULL LOAD CURRENT

10

9

8

7

6

5

4

3

2

1

0

THERMAL LIMIT CURVE

REMARKS: XE MOTOR-NEMA NOM. EFF. 93.6 %

AMPERES SHOWN FOR 460

VOLT CONNECTION, IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE

AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.

BALDOR

A MEMBER OF THE ABB GROUP

DR. BY J.P. TSAO

CK. BY W.L. SMITH

APP. BY W.L. SMITH

DATE 10/31/17

A-C MOTOR

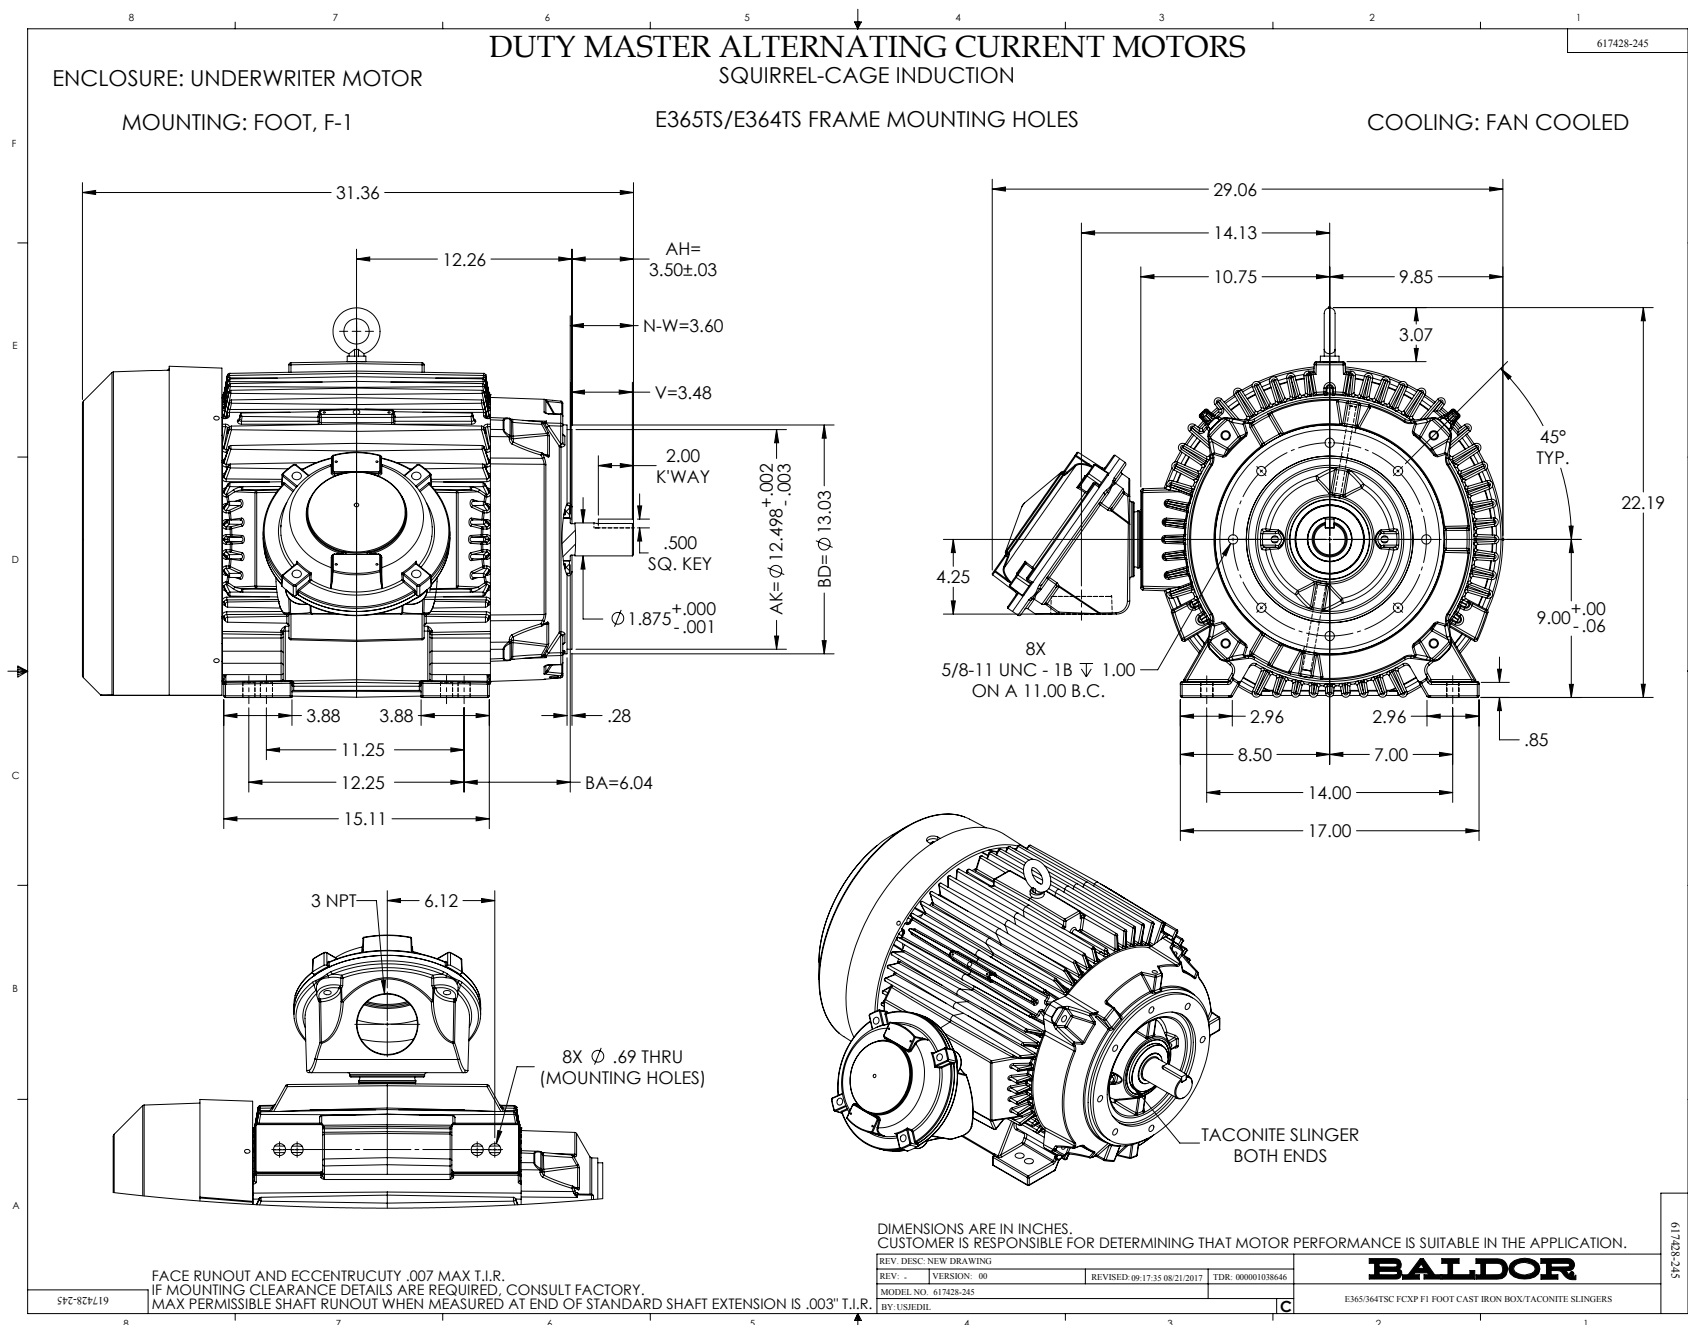
PERFORMANCE CURVES

A36WG1558-R015

ISSUE DATE 04/16/19








Printed on 4/16/19 9:05 @ bengap01.bal

Page 11 of 14



CONNECTION DIAGRAM
ACCESSORIES

MOTOR WINDING THERMOSTATS		
CONTACTS _____ @ _____ °C		
FIGURE NUMBER _____		
CONTACT RATING		
VOLTS	CONTINUOUS AMPERES	INRUSH AMPERES
110-120	3.0	30
220-240	1.5	15
440-480	0.75	7.5
550-600	0.60	6.0

THERMOSTATS	
NORMALLY CLOSED	NORMALLY OPEN
FIGURE 1 	FIGURE 4 
FIGURE 2 	FIGURE 5 
FIGURE 3 	FIGURE 6 
FIGURE 7 	FIGURE 8 

CUSTOMER _____ CUSTOMER ORDER NO. _____ S.O. NO. _____

418174-006

418174-006

REV. DESC: LOADED TO BUS		
REV. LTR: A	VERSION: 01	TDR: 000000570390
FILE: \RAG\00013\849	REVISED: 10:16:21 12/07/2010	BY: RAGDRF
MTL: -		

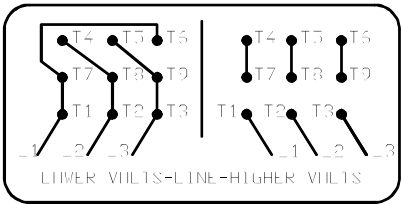
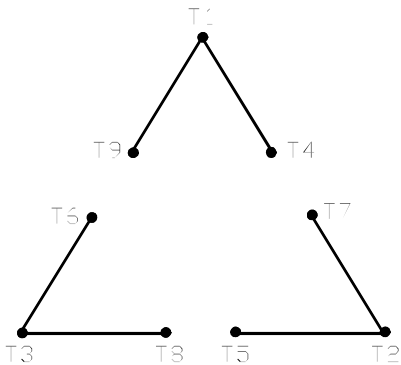
BALDOR

A-C MOTOR CONNECTION ACCESSORIES

SH 1 of 1

416820-002

A-C MOTOR
CONNECTION DIAGRAM
STANDARD 9 LEAD DELTA-CONNECTED



(N.P. 1575-B)

REV. DESC: FONT CHANGE FOR PDF SEARCHABLE		
REV. LTR: A	VERSION: 01	TDR: 000001009382
FILE: \MGA\00000\661	REVISED: 02:46:19 02/13/2020	BY: MGHMTT
MTL: —		

BALDOR - RELIANCE®

CONN DIAG — STANDARD 9 LEAD, DELTA-CONNECTED
SH 1 of 1

416820-002