



Customer information packet

CD2003P-2

L 0186ATC, 3HP, 1750RPM, 240, 120, DPFG, F3

Specifications

Armature Voltage	240 V
Base Speed	1750 rpm
Enclosure	DPFG
Field Voltage	120 V
	240 V
Output Power	3.000 HP
Agency Approvals	CSA
Ambient Temperature	40 °C
Armature Current	10.6 a
Drip Cover	No Drip Cover
Duty Rating	CONT
Feedback Device	NO FEEDBACK
Field Winding Type	STR. SHUNT
Heater Indicator	No Heater
Insulation Class	F
Lifting Lugs	Standard Lifting Lugs
Motor Standards	NEMA
Mounting Arrangement	F3
Overall Length	19.33 IN
Service Factor	1.00
Shaft Diameter	1.125 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Slinger Indicator	No Slinger
Thermal Device - Bearing	None

Part detail

Revision	-
Type	DC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	K0011A A
Layout	879
Eff. date	12-04-2019
CD Diagram	15209
Poles	00
Leads	
Proprietary	False
Created date	11-26-2019

Nameplate

NP1734									
CAT.NO.	CD2003P-2			MODEL	T18S8008				
HP	3	RPM	1750/2300		FRAME	L 0186ATC			
ARM V	240		ARM A	10.60	WOUND	STR. SHUNT			
FLD V	120/240	FLD A	.90-.46/.45-.23						
CONN			OHMS			CL	F		
ENCL	DPFG	DUTY	CONT		MX AMB	40			
P CODE	D	CTSR			SER.F.	1.0			
S/N				E/S	K0011A A				
	BRUSH:18044-8								
O.D.E. BRG.	6205	D.E. BRG.	6206	BRUSH	18044-8		QTY	2	

CUSTOMER NAME		MODEL NO.			MTG.		REMARKS:			
CUSTOMER P.O.		FRAME		R.P.M.	VOLTS	PHASE		INSUL		
CERTIFIED BY		DATE	H.P.	TYPE	ENCL	FREQ.		AMB.		
						UNITS: INCH	SCALE: NONE	PROPORTION: NONE	PART NUMBER 879	DWG. SIZE A

1/2-13UNC-2B THD X .75 DEEP
4-HOLES EQ. SPACED AT 90°
ON A 7.250 DIA. B.C.

3/8-16UNC-2B THD
X .88 DEEP IN SHAFT
END.

45°

8.500
8.498
DIA.

FU

2.03

3/4 N.P.T.
FOR CONDUIT

BB

2.03

4(H) HOLE DIA.

2F

B

BA

N-W

U

AK

BD

P

V

W

45°

CONDUIT

30°

BF

4-HOLES
EQ.SPACED

D

G

J

E

2E

A

.40

.063

.061

ACCESSORY MTG. FACE

.700

.695
DIA.

.9846

.9841
DIA.

STANDARD COMM END
FOR SINGLE SHAFT EXTENSION

FRAME	FOOT MOUNTING						D.E. SHAFT EXTENSION													DRIVE KEY		ACC SHAFT EXTENSION			ACC KEY	
	BA	E	2F	G	H	J	AH	AJ	AK	BB MAX	BD	THREAD	BF DEEP	N	N-W	U	V	W	KEY-SQ.	KEY-LONG	FN	FU	FV	KEY-SQ.	KEY-LONG	
L182ATC	2.75	3.75	4.50	.38	.406	1.50	2.125	7.250	8.500 ²	.25	8.69	1/2-13	.750	2.90	2.77	1.125	2.125 ⁴	.13	.25	1.38	2.28	.875	2.03	.188	1.38	
L186ATC	2.75	3.75	7.00	.38	.406	1.50	2.125	7.250	8.500 ²	.25	8.69	1/2-13	.750	2.90	2.77	1.125	2.125 ⁴	.13	.25	1.38	2.28	.875	2.03	.188	1.38	
1810ATC	2.75	3.75	11.00	.38	.406	1.50	2.125	7.250	8.500 ²	.25	8.69	1/2-13	.750	2.90	2.77	1.125	2.125 ⁴	.13	.25	1.38	2.28	.875	2.03	.188	1.38	

FRAME	FRAME						ARM APPROX. WK ² LBS.FT. ²	APPROXIMATE WEIGHT	
	A	B	C	FC	D	O			P
L182ATC	8.81	5.75	15.82	17.37	4.50 ³	8.94	8.88	.28	89
L186ATC	8.81	8.25	19.33	20.87	4.50 ³	8.94	8.88	.67	164
1810ATC	8.81	12.25	22.21	23.78	4.50 ³	9.00	9.00	1.0	200

1) SHAFT DIAMETERS TO 1.500 TOLERANCE +.000 - .0005
SHAFT DIAMETERS ABOVE 1.500 TOLERANCE +.000 - .0010
SHAFT DIAMETERS TO 1.625 RUNOUT .002 T.I.R. MAX.
SHAFT DIAMETERS ABOVE 1.625 RUNOUT .003 T.I.R. MAX.

2) "AK" DIMENSION UNDER 12.000 - DIAMETER TOLERANCE +.000 - .003
CONCENTRIC WITH SHAFT .004 T.I.R. MAX.
FACE RUNOUT WITH SHAFT .004 T.I.R. MAX.
DIAMETER TOLERANCE +.000 - .005
CONCENTRIC WITH SHAFT .007 T.I.R. MAX.
FACE RUNOUT WITH SHAFT .007 T.I.R. MAX.

3) "D" DIMENSION TOLERANCE +.000 - .030

4) "V" DIMENSION IS MAX. HUB LENGTH ON SHAFT


5) CONDUIT BOX CAN BE ROTATED IN 90° STEPS ON ITS OWN AXIS.

6) ALL DIMENSIONS NOT NOTED ARE NOMINAL DIMENSIONS CONSULT
FACTORY FOR TOLERANCES.

FOR F1 OR F2 CONDUIT BOX
LOCATION SEE SALES ORDER

DESIGNER CSL 7-19-91	BALDOR	TITLE: DIMENSION SHEET DPFG, STD ATC 8 1/2 DIA. PILOT		
ENGINEER RFL 7-19-91				
ENGINEER DAG 7-19-91				
MANUF. RWT 7-19-91				
A 19032 REDRAWN	CSL 7-19-1991	PART NUMBER 879	DWG. SIZE A	REV. A
REV. ECO.	DESCRIPTION	BY	DATE	

15209

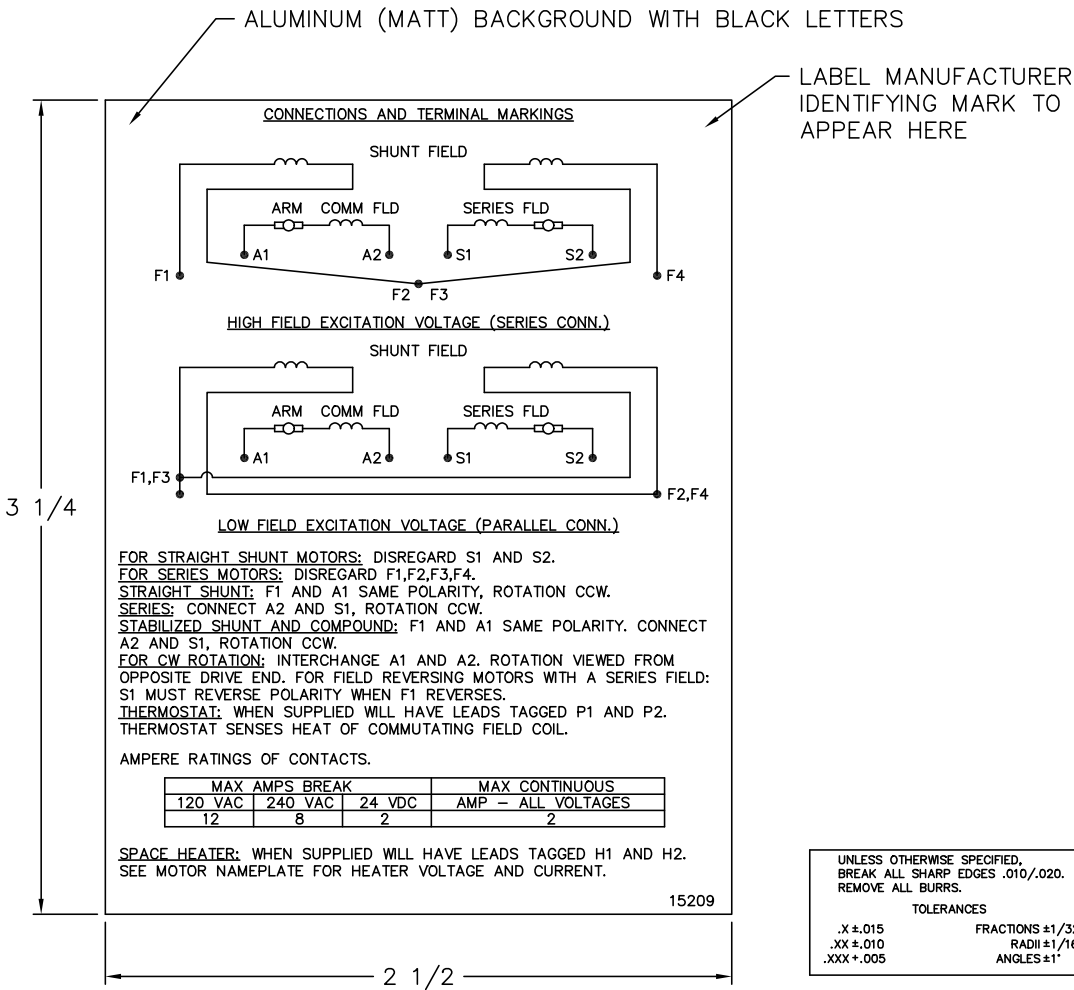

NOTE:
MATERIAL .005 MINIMUM FULL HARD
ALUMINUM DULL FINISH.
TEMP. RANGE -20°C TO +125°C
MAXIMUM.
FOR INDOOR AND OUTDOOR MOUNTING
BACK.
METAL, PRESSURE SENSITIVE BACK.
MUST MEET CSA STANDARD.
THE CSA IDENTIFYING MARK OF THE
LABEL MANUFACTURER MUST APPEAR
IN THE UPPER RIGHT HAND CORNER AS
INDICATED.

15209

MATL: NOTED			
REV:	G	CHANGE ALL "NAMEPLATE" TEXT TO "LABEL"	
60Z91		SCALE: -	BY: BKW
		REVISED: 02/19/97	
		FILE: CHB00002485	TDR: 0115147

BALDOR ELECTRIC Co.

LABEL, CONNECTIONS AND TERMINAL MARKINGS DC