



Customer information packet

CD2015P-2

15HP, 1750/2300RPM, DC, 258ATC, DPFG, F1

Specifications


Armature Voltage	240 V
Base Speed	1750 rpm
Enclosure	DPFG
Field Voltage	120 V
	240 V
Output Power	15.000 HP
Agency Approvals	CSA
Ambient Temperature	40 °C
Armature Current	55.0 a
Drip Cover	No Drip Cover
Duty Rating	CONT
Feedback Device	NO FEEDBACK
Field Winding Type	STR. SHUNT
Heater Indicator	No Heater
Insulation Class	F
Lifting Lugs	Standard Lifting Lugs
Motor Standards	NEMA
Mounting Arrangement	F1
Overall Length	29.84 IN
Service Factor	1.00
Shaft Diameter	1.624 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Slinger Indicator	No Slinger
Thermal Device - Bearing	None

Part detail

Revision	A
Type	DC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	K0035B A
Layout	880-1
Eff. date	02-26-2020
CD Diagram	15209
Poles	00
Leads	
Proprietary	False
Created date	12-12-2019

Nameplate

NP1734									
CAT.NO.	CD2015P-2		MODEL	T25S8006					
HP	15	RPM	1750/2300		FRAME	0258ATC			
ARM V	240		ARM A	55.00	WOUND	STR. SHUNT			
FLD V	120/240	FLD A	2.52-1.62/1.26-.81						
CONN			OHMS			CL	F		
ENCL	DPFG	DUTY	CONT		MX AMB	40			
P CODE	D	CTSR			SER.F.	1.0			
S/N			E/S	K0035B A					
	-								
O.D.E. BRG.	6207	D.E. BRG.	6209	BRUSH		150986-25-1		QTY	4

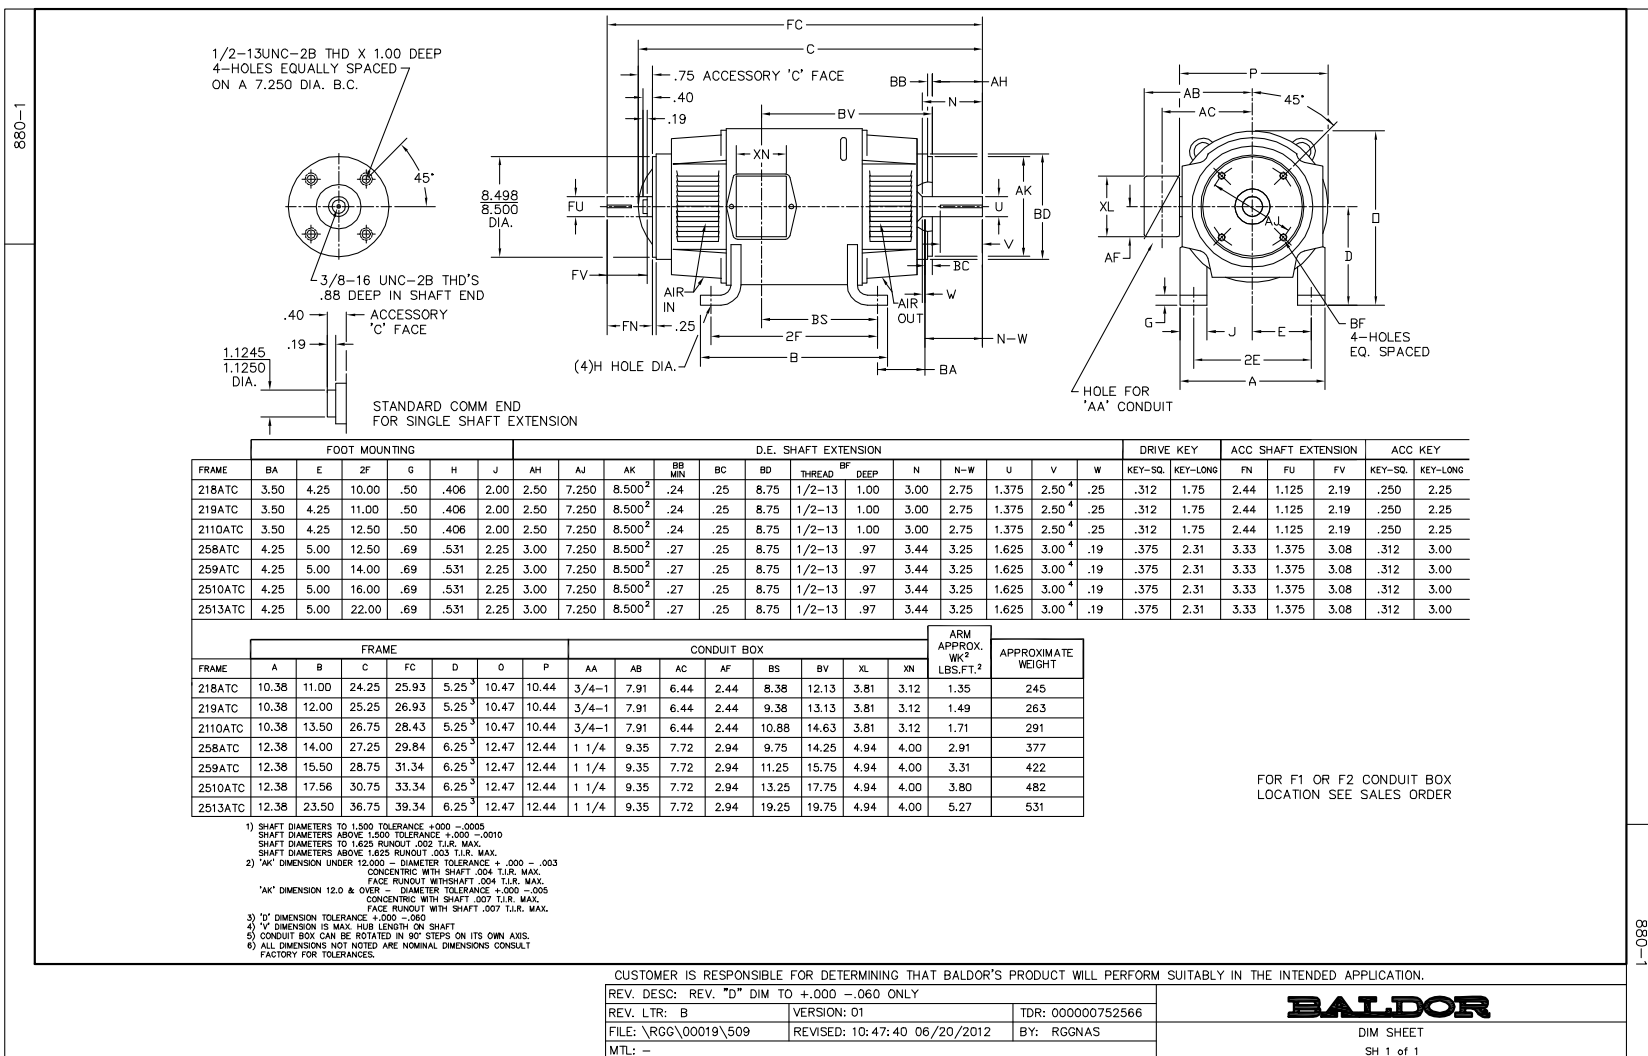

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.

REV. DESC: REV. "D" DIM TO +.000 - .060 ONLY

REV. LTR: B

VERSION: 01

TDR: 000000752566

FILE: \RGG\00019\509

REVISED: 10:47:40 06/20/2012

BY: RGGNAS


MTL: -

BALDOR

DIM SHEET

SH 1 of 1

15209

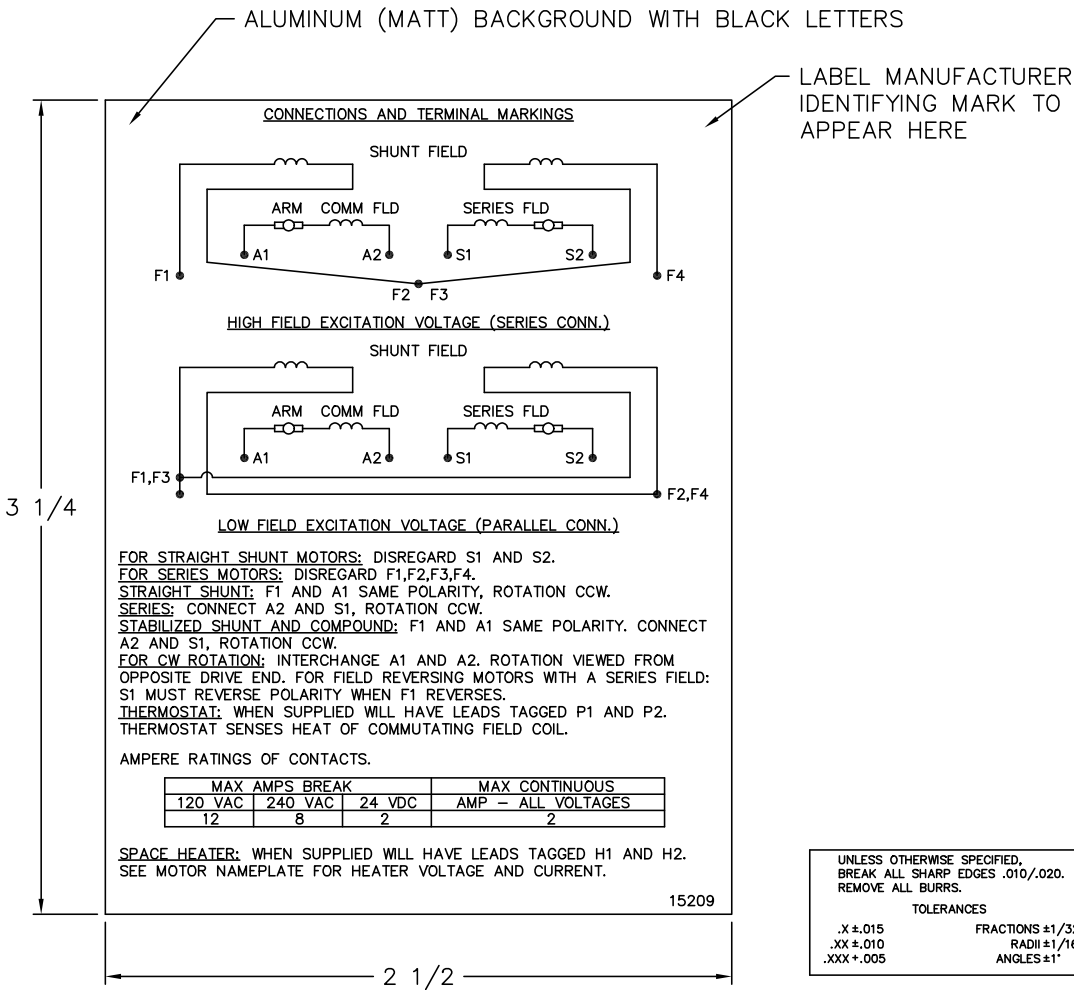

NOTE:
MATERIAL .005 MINIMUM FULL HARD
ALUMINUM DULL FINISH.
TEMP. RANGE -20°C TO +125°C
MAXIMUM.
FOR INDOOR AND OUTDOOR MOUNTING
BACK.
METAL, PRESSURE SENSITIVE BACK.
MUST MEET CSA STANDARD.
THE CSA IDENTIFYING MARK OF THE
LABEL MANUFACTURER MUST APPEAR
IN THE UPPER RIGHT HAND CORNER AS
INDICATED.

15209

MATL: NOTED			
REV:	G	CHANGE ALL "NAMEPLATE" TEXT TO "LABEL"	
60Z91		SCALE: -	BY: BKW
		REVISED: 02/19/97	
		FILE: CHB00002485	TDR: 0115147

BALDOR ELECTRIC Co.

LABEL, CONNECTIONS AND TERMINAL MARKINGS DC