



Customer information packet

CDP3430-V24

.5HP, 1800RPM, DC, 56C, 3424P, TENV, F1

Class - None

Division -

Specifications

Armature Voltage	24 V
Base Speed	1800 rpm
Enclosure	TENV
Frame	56C
Frame Material	Steel
Haz Area Class and Group	None
Output Power	0.500 HP
Agency Approvals	CSA UR
Ambient Temperature	40 °C
Armature Current	19.6 a
Armature Inertia	8.264 lb-ft ²
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Drip Cover	No Drip Cover
Duty Rating	CONT
Feedback Device	NO FEEDBACK
Heater Indicator	No Heater
Lifting Lugs	No Lifting Lugs
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	2 @ 12 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Mounting Arrangement	F1
Overall Length	12.60 IN
Product Family	General Purpose
Pulley End Bearing Type	Sealed Bearing
Service Factor	1.00
Shaft Diameter	0.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible

Part detail

Revision	K
Type	DC
Mech. spec.	34-6943
Base	
Status	PRD/A
Elec. spec.	34WGZ611
Layout	34LY6943
Eff. date	10-25-2024
CD Diagram	CD0194
Poles	00
Leads	
Proprietary	False
Created date	01-01-0001

Shaft Slinger Indicator

No Slinger



Nameplate

NP0111L			
CAT.NO.	CDP3430-V24		
SPEC.	34-6943Z611G2		
HP	.5	ENCL	TENV
RPM	1800		
FRAME	56C	TYPE	3424P
ARM V	24	ARM A	19.6
FLD V		FLD A	
INSUL	F	AMB.	40
DUTY	CONT	SUPPLY	A
BRG/DE	6203	BRG/ODE	6203
BRUSHES	2/BP5104BV01		
	BLANK		
SER.			
BLANK			
APRV-CSA	APRV-UL		

DC Motor Performance Data

Record # 500

Typical performance - not guaranteed values

Winding: 34WGZ611-R003		Type: 3424P	Enclosure: TENV
Nameplate Data		General Characteristics	
Rated Output (HP)	0.5	Armature Resistance @ 25°C	0.0933 Ω
R.P.M.	1800		
Armature Volts	24	Voltage Constant	12.46 v/krpm
Armature Amps	19.6		
Field Volts		Armature Inductance	0.7493 mH
Field Amps		Armature Inertia	8.2643 LI^2
Rating - Duty	40C AMB-CONT		
Power Supply Code	A		

Load Characteristics at 24 Armature Volts

Load Point	1	2	3	4	5	6	7
Armature Amps	2.28	5.71	9.68	13.5	17.5	21.4	25
R.P.M.	1900	1861	1807	1760	1703	1658	1591
Torque (LB-FT)	0	0.37	0.73	1.1	1.47	1.83	2.2


ABB Motors and Mechanical Inc.


WINDING # 34WGZ611

Typical performance - not guaranteed values.


0.5 HP DC 1800 RPM 24 V 3424P

ENCL: TENV DUTY: CONT CL: F

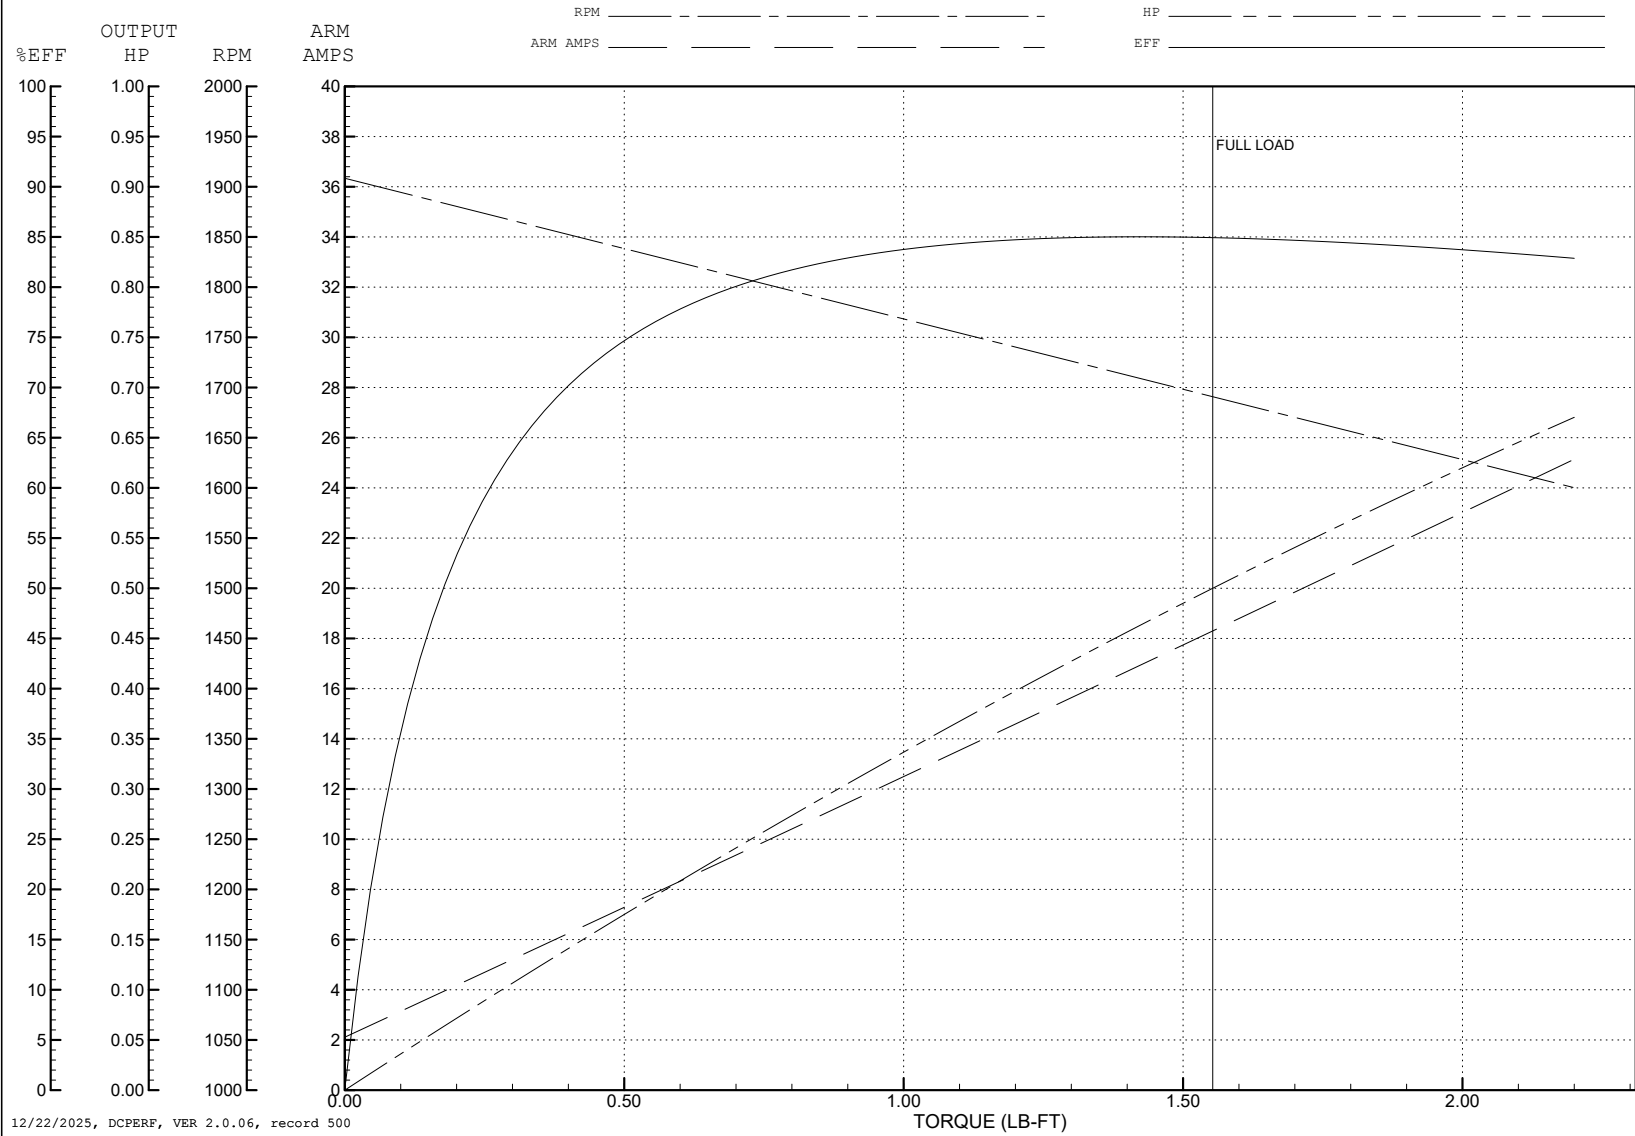

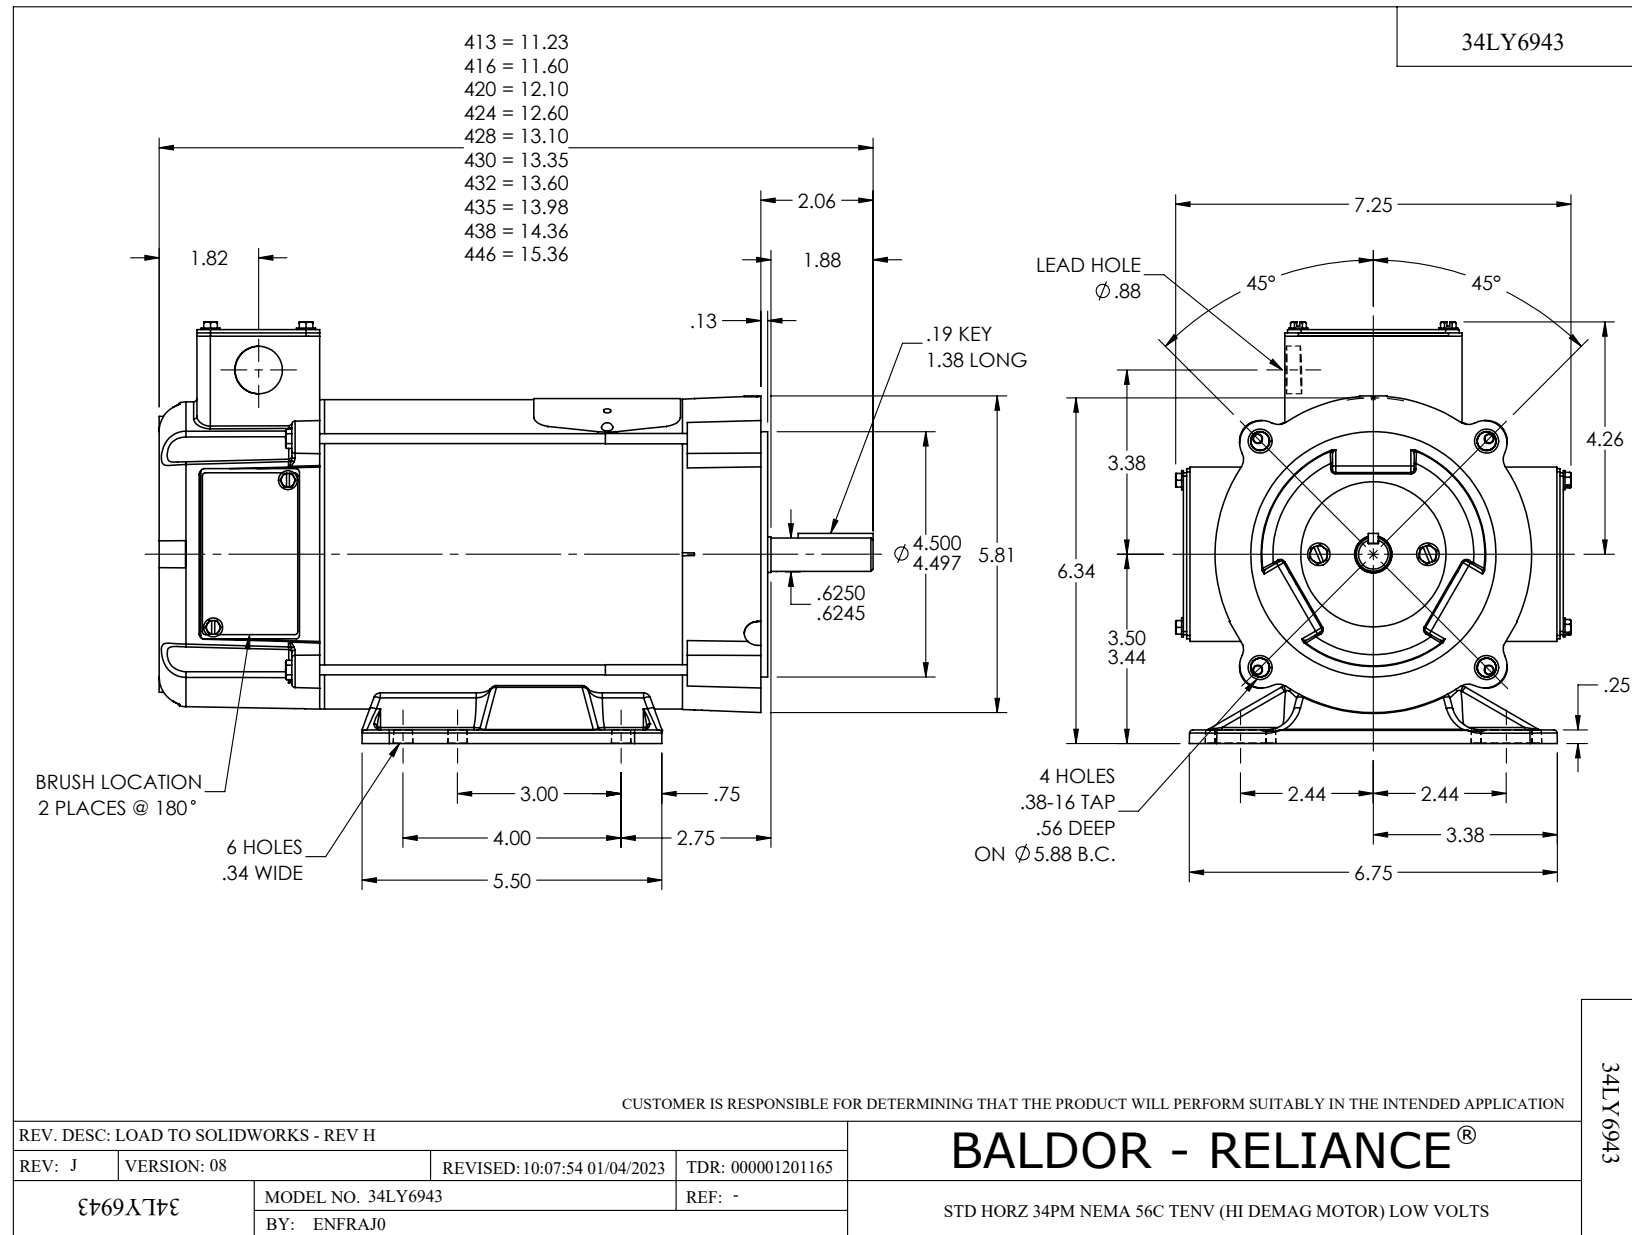

CD0194

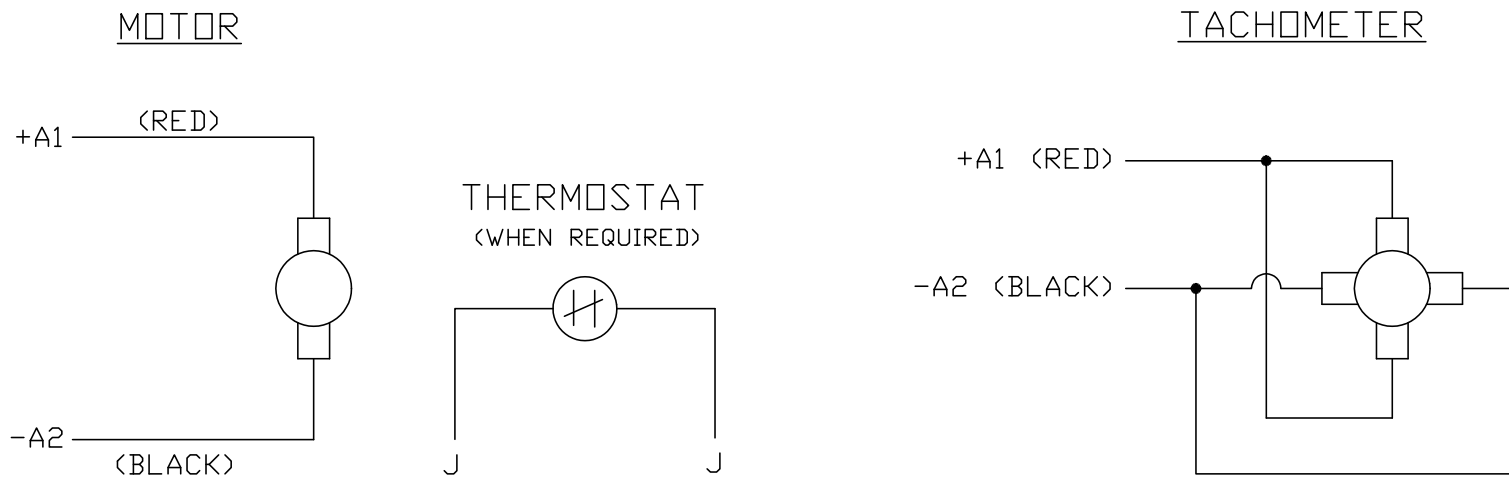

NOTES:

1. CCW ROTATION AS SHOWN FACING COMMUTATOR END. TO REVERSE MOTOR ROTATION OR TACHOMETER OUTPUT POLARITY INTERCHANGE LEADS A1(RED) & A2(BLACK)
2. LEAD COLORS FOR REFERENCE ONLY & NOT SPECIFIED BY THIS DRAWING. LEAD COLORS SPECIFIED BY LAYOUT DRAWING & BILL OF MATERIAL ONLY.

MATL: -			
REV:	E	ADDED NOTE "LEAD COLORS FOR REFERENCE ONLY &..."	
CD0194		SCALE: -	BY: CK
		FILE: AAA00004503	TDR: 0078737

BALDOR ELECTRIC Co.

CD TYPE P DC PERMANENT MAGNET MOTORS AND TACHOMETERS

CD0194