



Customer information packet

CDRX25164T

10HP, 1180//980RPM, 3PH, 60/50HZ, 256TC, XPFC

Class - CLI GP C,D

Division - Division I

Specifications

Enclosure	XPFC
Frame	256TC
Frame Material	Iron
Frequency	50.00 Hz 60.00 Hz
Haz Area Class and Group	CLI GP C,D
Haz Area Division	Division I
Motor Letter Type	Three Phase
Output @ Frequency	10.000 HP @ 60 HZ 7.500 HP @ 50 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	380.0 V @ 50 HZ 230.0 V @ 60 HZ 190.0 V @ 50 HZ 460.0 V @ 60 HZ
Agency Approvals	CSA EEV UL
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	6
Current @ Voltage	30.400 A @ 208.0 V 30.000 A @ 230.0 V 28.000 A @ 190.0 V 15.000 A @ 460.0 V 14.000 A @ 380.0 V
Design Code	A
Drip Cover	No Drip Cover

Part detail

Revision	H
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	09WGGZ383
Layout	09LYF368
Eff. date	02-14-2024
CD Diagram	CD0005
Poles	06
Leads	9#12
Proprietary	False
Created date	06-04-2019

Duty Rating	CONT
Efficiency @ 100% Load	91.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	14.0 a
Insulation Class	F
Inverter Code	Inverter Duty
IP Rating	NONE
KVA Code	J
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	1800 rpm
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0956M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	26.00 IN
Power Factor	70
Product Family	Hazardous Location Motor
Pulley Face Code	C-Face
Rodent Screen	None
RoHS Status	ROHS NON-COMPLIANT
Service Factor	1.00
Shaft Diameter	1.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Speed	1180 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat

Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1401XPSLEV												
NO.						CC	010A					
S/N						TEMP CODE	T3C					
SPEC.	09-0000-1442					INV.TYPE	PWM					
CAT.NO.	CDRX25164T					C HP FR	60	C HP TO	90			
HP	10//7.5					CT HZ FROM	6	CT HZ TO	60			
VOLTS	230/460//190/380					VT HZ FROM	6	VT HZ TO	60			
AMPS	30/15//28/14				MAG CUR	15.8/7.9						
RPM	1180//980				MX RPM	1800						
HZ	60//50	PH	3	CL	F	NOM.EFF.	91					
SER.F.	1.00	DES	A	SL HZ	1	WK2	4.5					
FRAME	256TC	RATING		40C AMB-CONT								
	55C AMB @ 1.0 SF, 60C RISE											
	1.15SF ON SINEWAVE				NEMA MG-1 PT.5,IP55							

AC Induction Motor Performance Data

Record # 73723

Typical performance - not guaranteed values

Winding: 09WGZ383-R006			Type: 0956M		Enclosure: XPFC		
Nameplate Data			460 V, 60 Hz: High Voltage Connection				
Rated Output (HP)		10	Full Load Torque		44.4 LB-FT		
Volts		230/460	Start Configuration		direct on line		
Full Load Amps		29.2/14.6	Breakdown Torque		146 LB-FT		
R.P.M.		1180	Pull-up Torque		53.6 LB-FT		
Hz	60	Phase	3	Locked-rotor Torque		73.6 LB-FT	
NEMA Design Code		A	KVA Code	J	Starting Current		95.3 A
Service Factor (S.F.)			1	No-load Current		7.9 A	
NEMA Nom. Eff.		91	Power Factor	70	Line-line Res. @ 25°C		0.659 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		45°C	
S.F. Amps				Temp. Rise @ S.F. Load		53°C	
				Locked-rotor Power Factor		24.2	
				Rotor inertia		4.5 LB-FT2	

Load Characteristics 460 V, 60 Hz, 10 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	32	52	63	70	72	73
Efficiency	83.6	89.7	91.3	91.5	91.1	90.3
Speed	1196	1191	1186	1182	1176	1169
Line amperes	8.74	10.1	12.2	14.7	17.7	21


ABB Motors and Mechanical Inc.

WINDING # 09WGZ383

Typical performance - not guaranteed values.

10 HP 3 PH 60 HZ 1180 RPM 460 V 0956M

TORQUES (LB-FT): PO=146 PU=53.6 LR=73.6 LRA=95.3

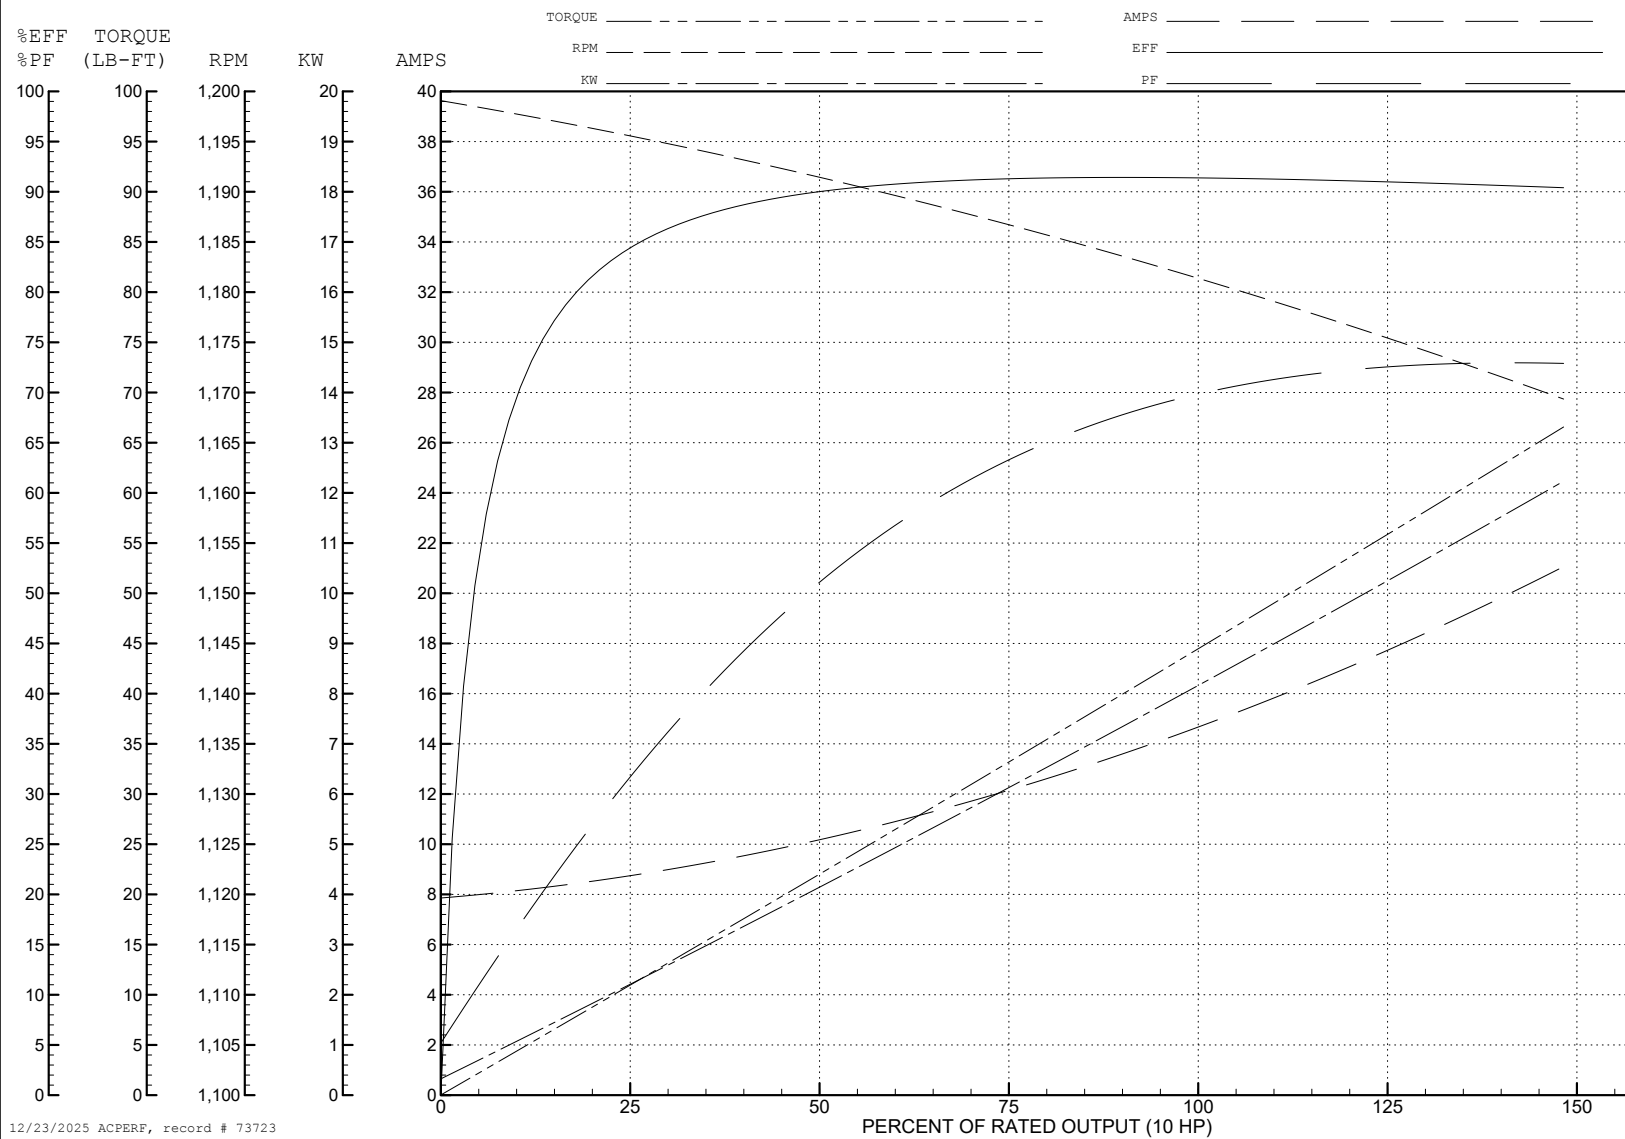

AC Induction Motor Performance Data

Record # 75809

Typical performance - not guaranteed values

Winding: 09WGZ383-R004			Type: 0956M		Enclosure: XPFC		
Nameplate Data			380 V, 50 Hz: High Voltage Connection				
Rated Output (HP)		10//7.5	Full Load Torque		40.04 LB-FT		
Volts		230/460//190/380	Start Configuration		direct on line		
Full Load Amps		30/15//28/14	Breakdown Torque		141 LB-FT		
R.P.M.		1180//980	Pull-up Torque		56.44 LB-FT		
Hz	60//50	Phase	3	Locked-rotor Torque		77.49 LB-FT	
NEMA Design Code		A	KVA Code	J	Starting Current		93.43 A
Service Factor (S.F.)			1	No-load Current		7.77 A	
NEMA Nom. Eff.		91	Power Factor	70	Line-line Res. @ 25°C		0.659 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		40°C	
S.F. Amps				Temp. Rise @ S.F. Load		48°C	
				Locked-rotor Power Factor		27.1	
				Rotor inertia		4.5 LB-FT2	

Load Characteristics 380 V, 50 Hz, 7.5 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	31	50	61	68	71	73
Efficiency	83	89.2	90.8	91.1	90.6	89.7
Speed	996	992	987	984	978	972
Line amperes	8.53	9.7	11.52	13.72	16.39	19.29


ABB Motors and Mechanical Inc.


WINDING # 09WGZ383

Typical performance - not guaranteed values.



7.5 HP 3 PH 50 HZ 984 RPM 380 V 0956M

TORQUES (LB-FT) : PO=141 PU=56.44 LR=77.49 LRA=93.43

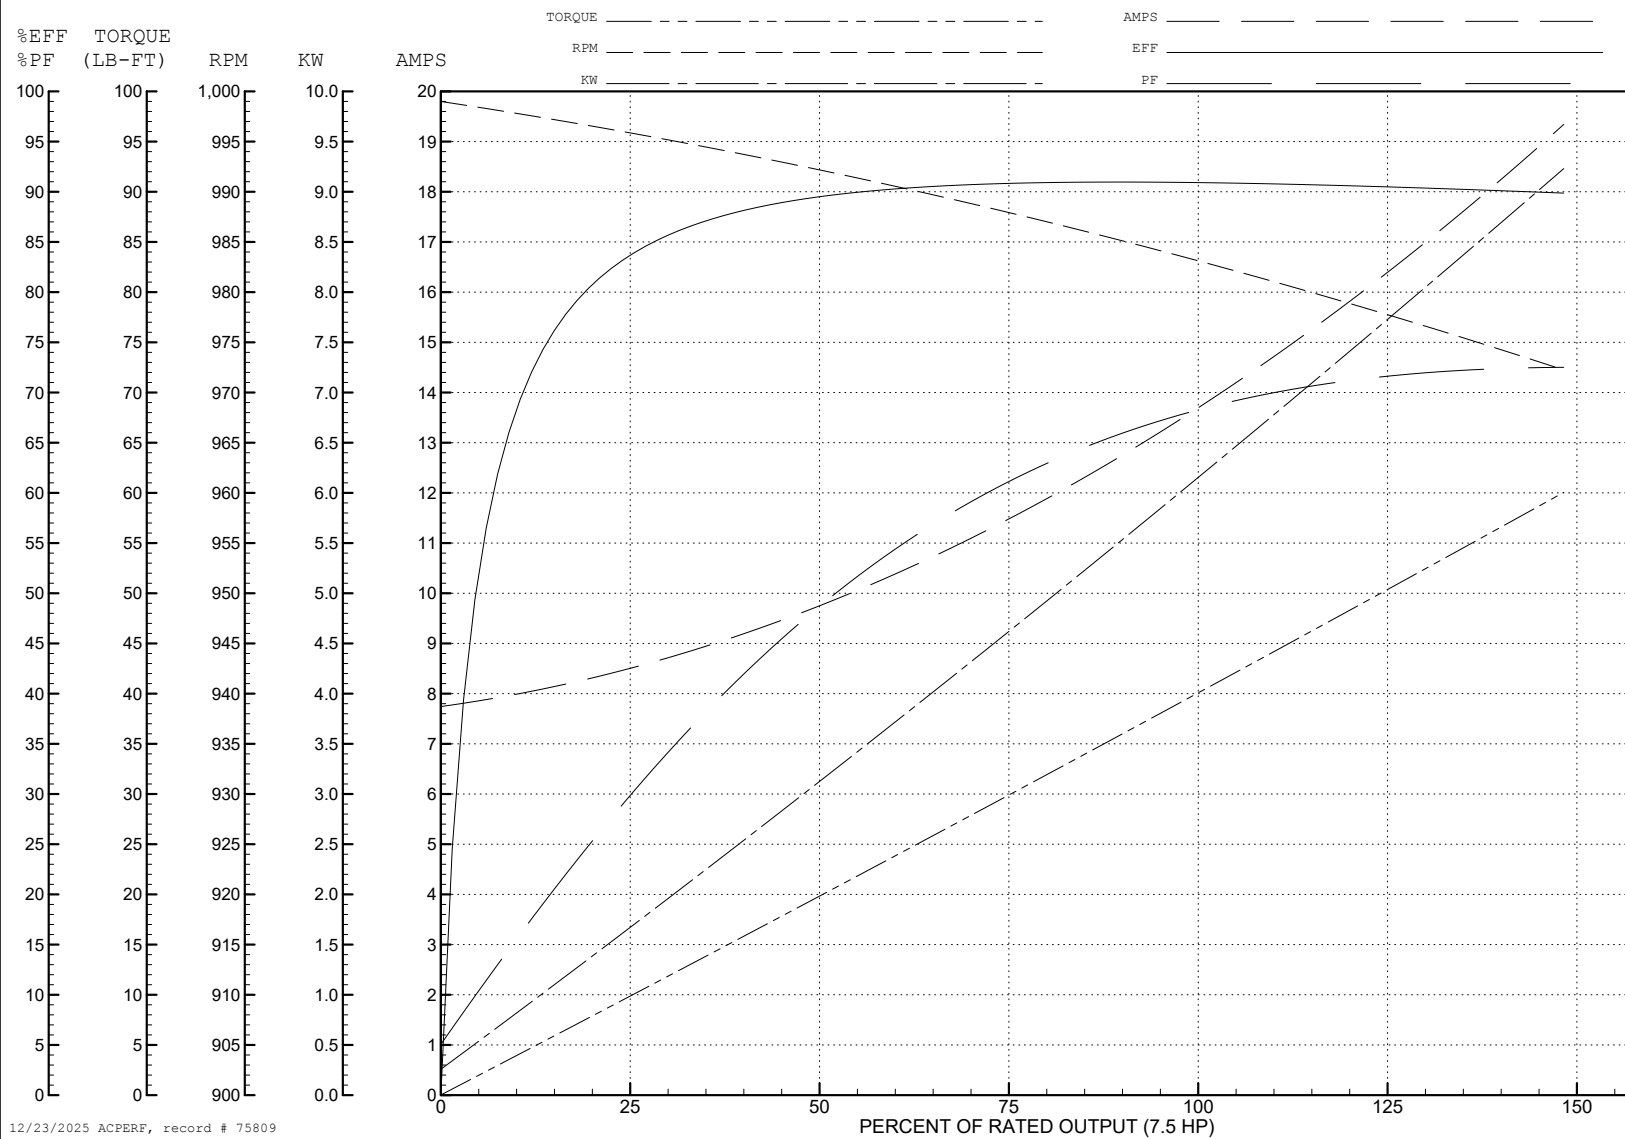


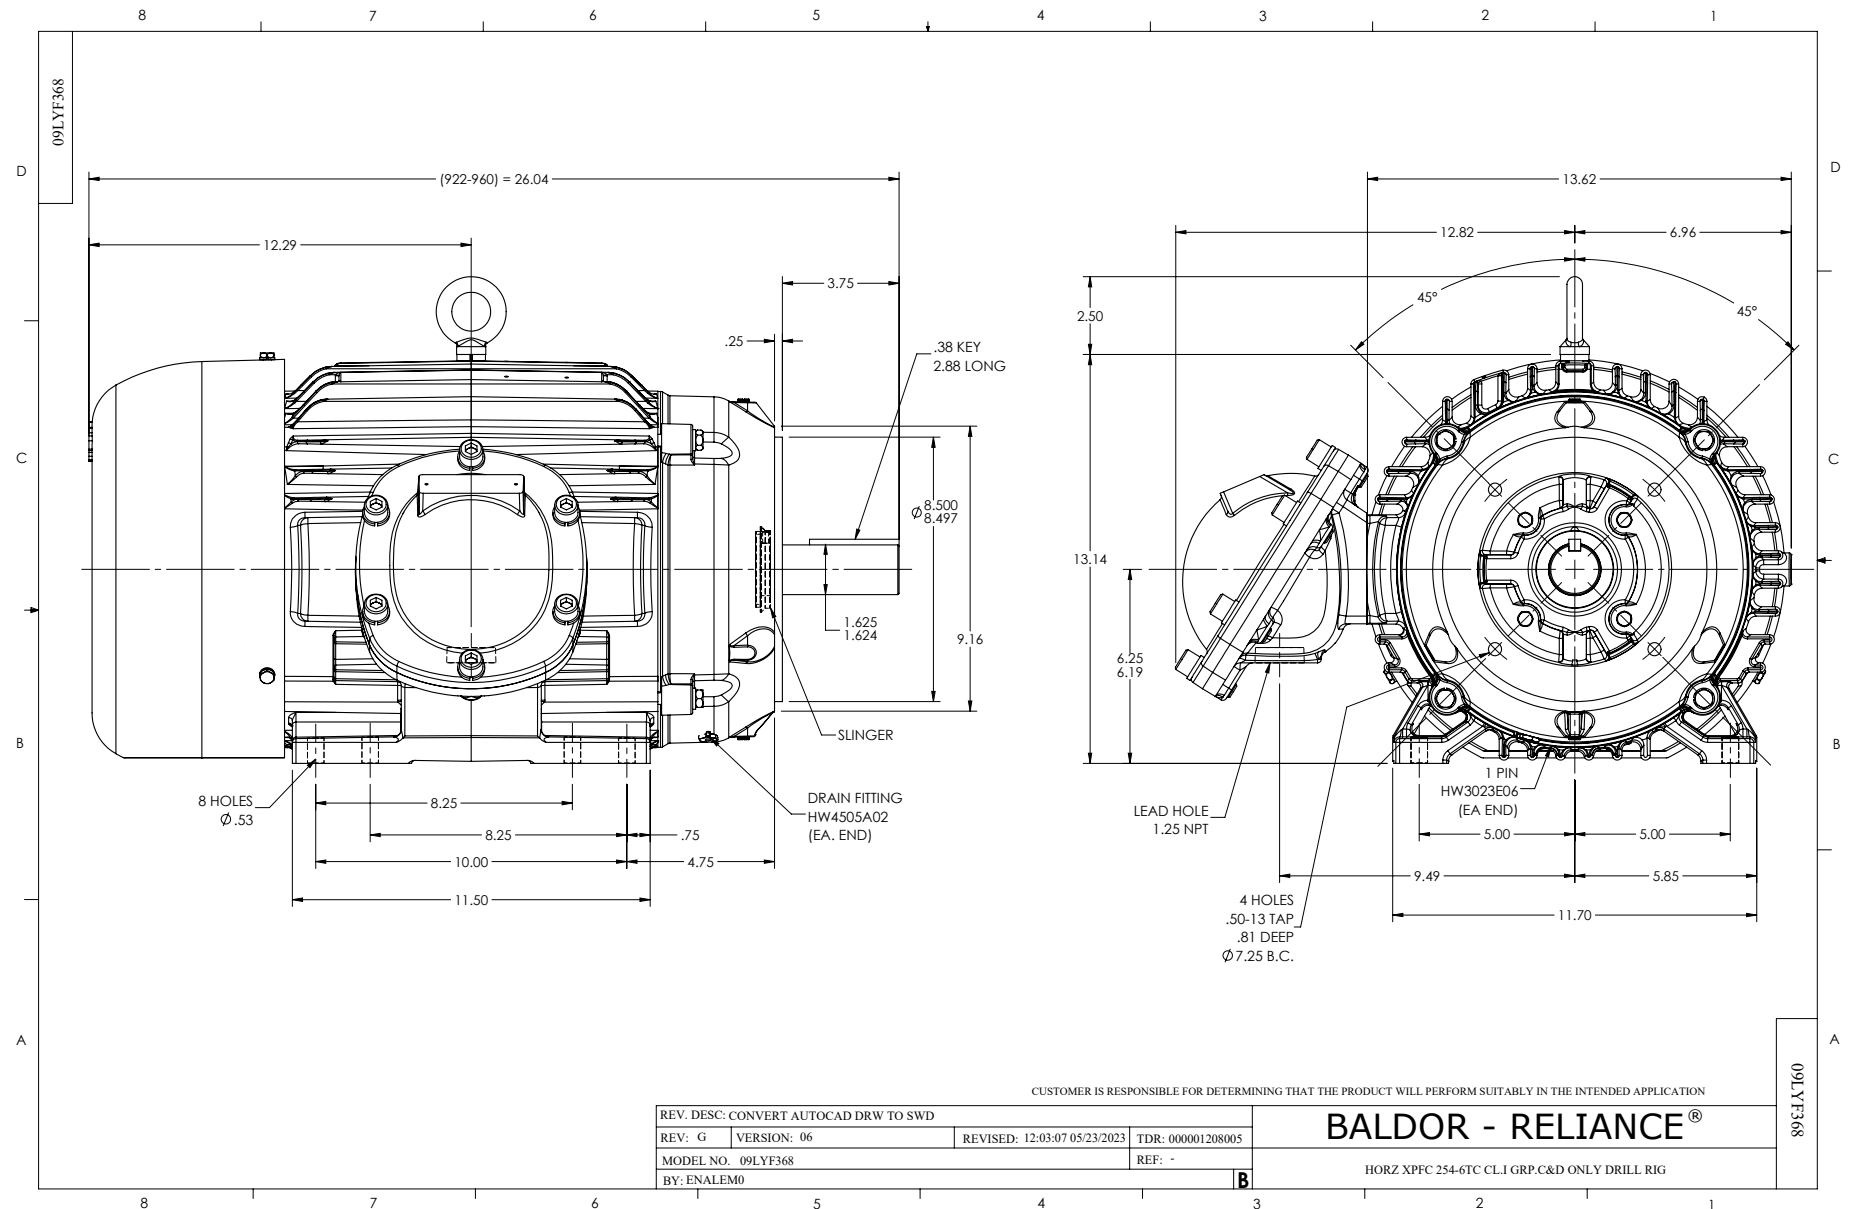

CD0005

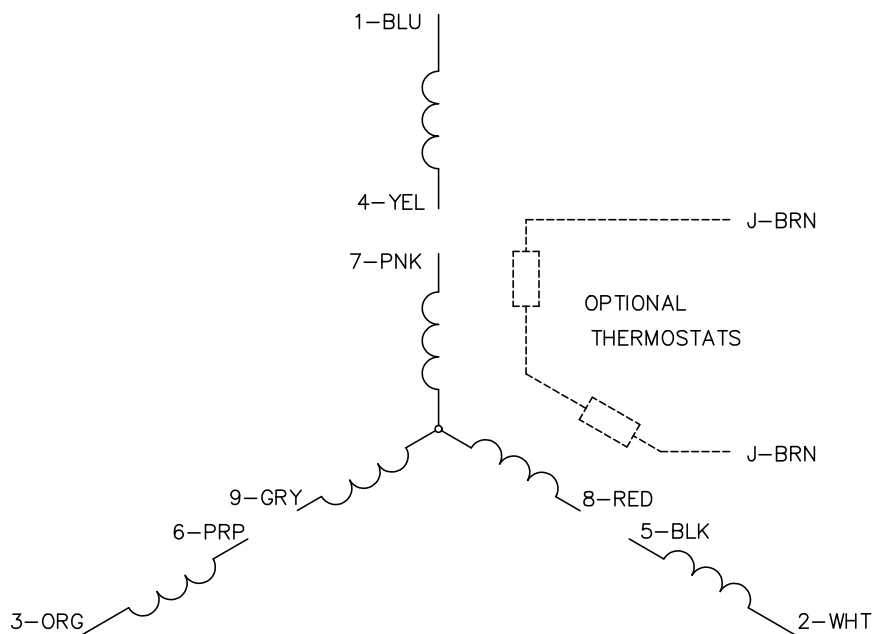LOW VOLTAGE
(2Y)

LINE

HIGH VOLTAGE
(1Y)

LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS

REV. LTR: E

BY: JLP

REVISED: 01/19/99 10:15

TDR: 0171435

S00000

FILE: AAA00005140

MDL: -

MTL: -

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS

CD0005