



Customer information packet

CECP2334T-4

20HP, 1770RPM, 3PH, 60HZ, 256TC, 0960M, TEFC, F

Class - CLI GP A,B,C,D

Division - Division II

Specifications

Enclosure	TEFC
Frame	256TC
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CL I GP A,B,C,D
Haz Area Division	Division II
Motor Letter Type	Three Phase
Output @ Frequency	20.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	CCSA US CSA EEV NEMA PREMIUM NEMA_PREMIUM UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	1.0
Current @ Voltage	24.000 A @ 460.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	93.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None

Part detail

Revision	K
Type	AC
Mech. spec.	09H180
Base	
Status	PRD/A
Elec. spec.	09WGT506
Layout	09LYH180
Eff. date	09-16-2025
CD Diagram	CD0006
Poles	04
Leads	3#10
Proprietary	False
Created date	11-20-2017

Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	24.0 a
Insulation Class	F
Inverter Code	Inverter Duty
KVA Code	J
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	2700 rpm
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	3 @ 10 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0960M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	25.28 IN
Power Factor	83
Product Family	Super-E Chemical Processing
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1770 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None

Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3995ABBL													
CAT #		CECP2334T-4				SER				CC		010A	
SPEC		09H180T506G1				RATING		40C AMB-CONT					
HZ		VOLTS		AMPS		RPM		HP		CODE		SF DES PF NEMA NOM. EFF	
60		460		24		1770		20		J		1.15 A 83 % 93 %	
PH		3		CL F		MAX RPM		2700		MAX CORR KVAR		5.45	
IP55		FR		256TC		ENCL		TEFC		DE BRG		6309	
GREASE		POLYREX EM				MTR WT		336		LBS			
USABLE AT		50HZ 15HP 380V 22A				SF1.0							
CL I DIV 2 GRPS A,B,C,D				CL I ZONE 2 GRPS				IIA,IIB,IIC				TEMP T 160 C	
1.0 SF ON PWM INVERTER				POWER		INV TEMP CL		180		C			
CHP		60-90		HZ		1.5:1		CT		1.0-60		HZ	
SPACE HEATER LEADS H1-H2:				TIE LIKE NUMBERS				TOGETHER					
V		A		W		MAX SPACE HEATER TEMP							

AC Induction Motor Performance Data

Record # 72646

Typical performance - not guaranteed values

Winding: 09WGT506-R002			Type: 0960M		Enclosure: TEFC		
Nameplate Data				460 V, 60 Hz: Single Voltage Motor			
Rated Output (HP)		20		Full Load Torque		59.27 LB-FT	
Volts		460		Start Configuration		direct on line	
Full Load Amps		24		Breakdown Torque		232 LB-FT	
R.P.M.		1770		Pull-up Torque		126 LB-FT	
Hz	60	Phase	3	Locked-rotor Torque		141 LB-FT	
NEMA Design Code		A	KVA Code	J	Starting Current		198 A
Service Factor (S.F.)		1.15		No-load Current		10.4 A	
NEMA Nom. Eff.		93	Power Factor	83	Line-line Res. @ 25°C		0.332 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		58°C	
S.F. Amps				Temp. Rise @ S.F. Load		70°C	
				Locked-rotor Power Factor		26.9	
				Rotor inertia		2.65 LB-FT2	

Load Characteristics 460 V, 60 Hz, 20 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	45	67	78	83	86	87	85
Efficiency	89.2	93	93.7	93.6	93.1	92.4	93.3
Speed	1793	1786	1779	1772	1764	1755	1767
Line amperes	11.8	15	19.2	24	29.3	34.9	27.2


ABB Motors and Mechanical Inc.


WINDING # 09WGT506

Typical performance - not guaranteed values.




20 HP 3 PH 60 HZ 1770 RPM 460 V 0960M

TORQUES (LB-FT): PO=232 PU=126 LR=141 LRA=198

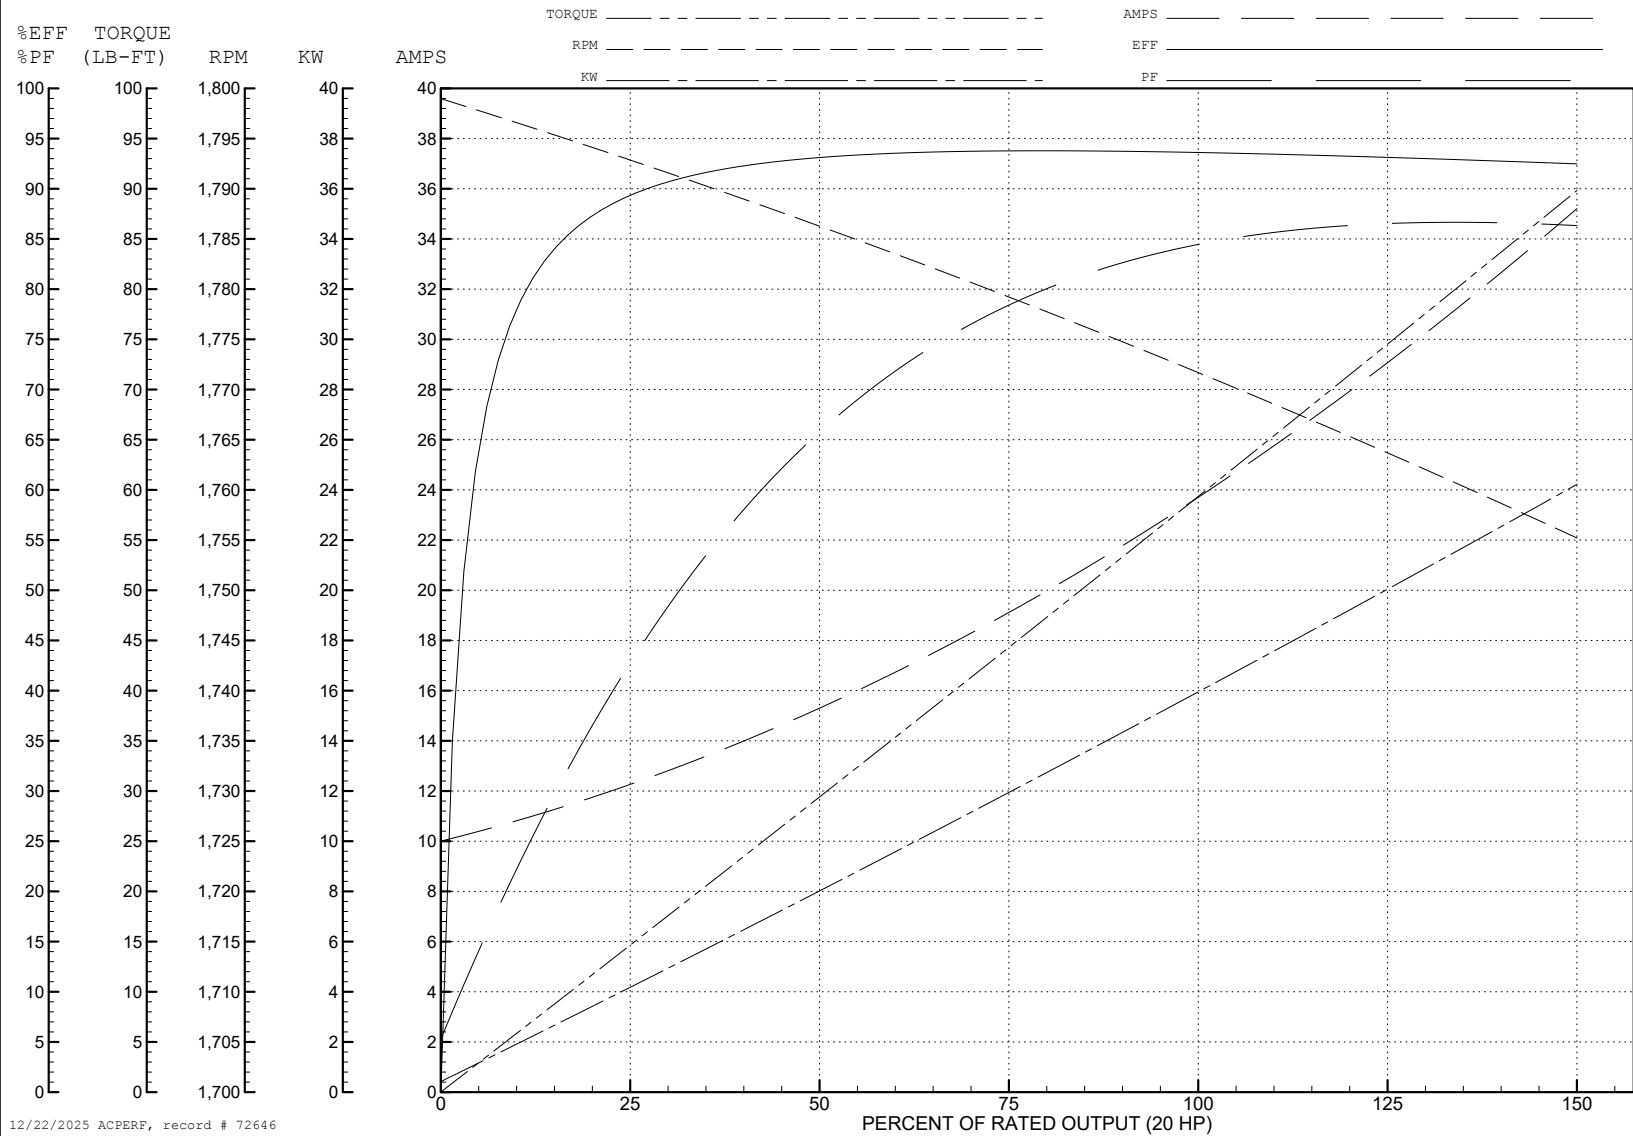

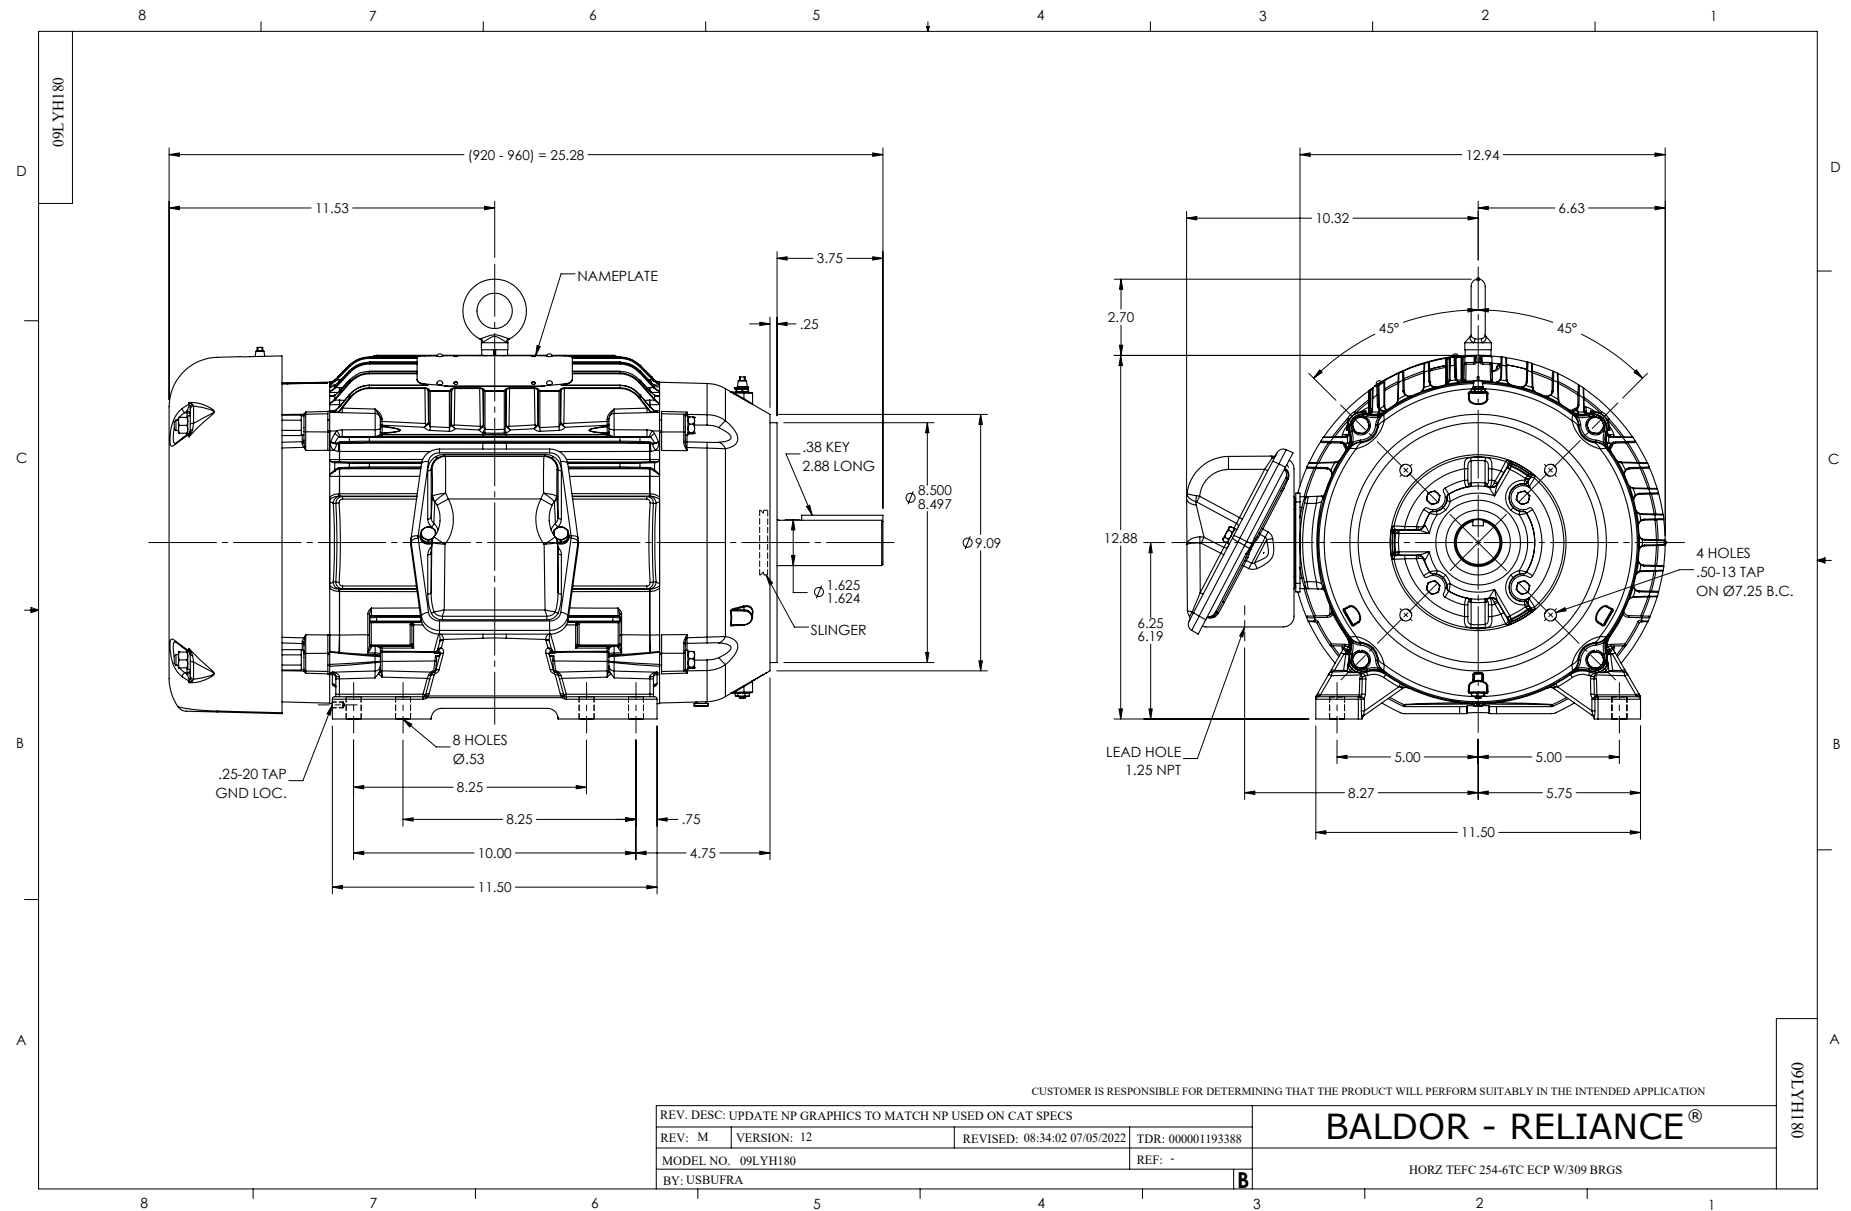

CD0006

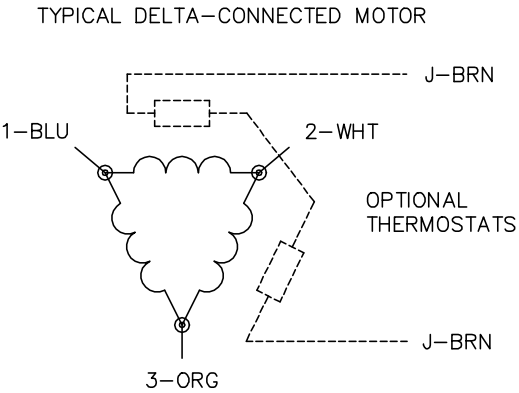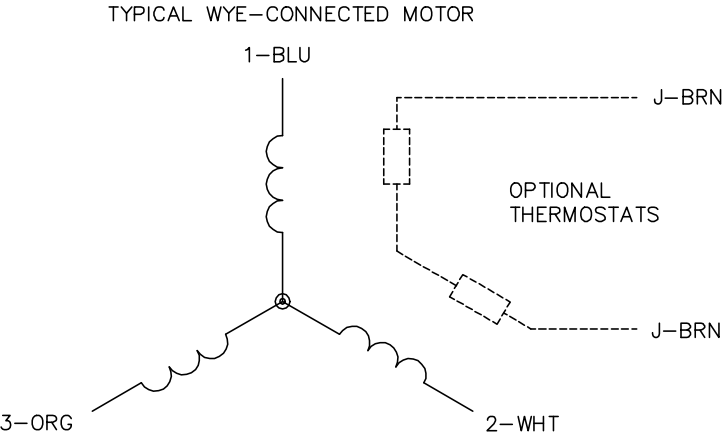

- NOTES:
- 1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
 - 2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
 - 3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
 - 4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
 - 5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007		
REV. LTR: E	VERSION: 01	TDR: 000001099922
FILE: \AAA\00005\141	REVISED: 10: 24: 49 02/19/2019	BY: ENBRIRO
MTL: —		

BALDOR - RELIANCE®

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1