



Customer information packet

CECP4103T-4

25HP, 1770RPM, 3PH, 60HZ, 284TC, 1056M, TEFC, F

Class - CLI GP A,B,C,D

Division - Division II

Specifications

Enclosure	TEFC
Frame	284TC
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CL I GP A,B,C,D
Haz Area Division	Division II
Motor Letter Type	Three Phase
Output @ Frequency	25.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	CSA EEV NEMA PREMIUM NEMA_PREMIUM UR CCSA US
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	1.0
Current @ Voltage	30.000 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	93.6 %
Electrically Isolated Bearing	Not Electrically Isolated
Enclosure Modification	Severe Duty Features
Feedback Device	NO FEEDBACK
Front Face Code	Standard

Part detail

Revision	M
Type	AC
Mech. spec.	10H412
Base	
Status	PRD/A
Elec. spec.	10WGZ580
Layout	10LYH412
Eff. date	09-29-2025
CD Diagram	CD0006
Poles	04
Leads	3#10
Proprietary	False
Created date	01-11-2017

Front Shaft Indicator	None
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	30.0 a
Insulation Class	F
Inverter Code	Inverter Duty
KVA Code	F
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	2700 rpm
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	3 @ 10 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	1056M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	28.00 IN
Power Factor	85
Product Family	Super-E Chemical Processing
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.875 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1770 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None

Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3241

CAT.NO.	CECP4103T-4			P/N					ENCLOSURE		TEFC	
SPEC.	10H412Z580G1			CC	010A	FRAME	284TC		S/N			
HP	25			CLASS	F	HZ	60	DES	B			
RPM	1770			RPM MAX	2700		PH	3	KVA-CODE	F		
VOLT	460			MOTOR WEIGHT			473					
AMP	30			SER.F.	1.15	PF	85	ODE BRG	6311	DE BRG	6311	
RATING	40C AMB-CONT			NEMA-NOM-EFF			93.6		GREASE	POLYREX EM		
							INV.TYPE		PWM			
TEMP CODE	T3C		INVERTER-TEMP-CODE			180						
TEMP =	160	C HP FR	60	C HP TO		90						
CT HZ FROM	1.0	CT HZ TO		60								
HTR-VOLTS	HTR-AMPS				HTR-WATTS				MAX. SPACE HEATER TEMP.			
									VT HZ FROM		O	VT HZ TO
												60

AC Induction Motor Performance Data

Record # 61560

Typical performance - not guaranteed values

Winding: 10WGZ580-R001			Type: 1056M		Enclosure: TEFC		
Nameplate Data			460 V, 60 Hz: Single Voltage Motor				
Rated Output (HP)		25	Full Load Torque		74.31 LB-FT		
Volts		460	Start Configuration		direct on line		
Full Load Amps		30	Breakdown Torque		197 LB-FT		
R.P.M.		1770	Pull-up Torque		91.4 LB-FT		
Hz	60	Phase	3	Locked-rotor Torque		115 LB-FT	
NEMA Design Code		B	KVA Code	F	Starting Current		173 A
Service Factor (S.F.)		1.15	No-load Current		10.4 A		
NEMA Nom. Eff.		93.6	Power Factor	85	Line-line Res. @ 25°C		0.29877 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		54°C	
S.F. Amps				Temp. Rise @ S.F. Load		67°C	
				Locked-rotor Power Factor		30.3	
				Rotor inertia		4.46 LB-FT2	

Load Characteristics 460 V, 60 Hz, 25 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	51	73	81	85	86	86	86
Efficiency	91	93.8	94.1	93.7	92.9	91.8	93.2
Speed	1792.8	1785.5	1778.9	1770.7	1762.4	1751.5	1766
Line amperes	12.5	17	22.9	29.5	36.5	44.7	33.7


ABB Motors and Mechanical Inc.


WINDING # 10WGZ580

Typical performance - not guaranteed values.

25 HP 3 PH 60 HZ 1770 RPM 460 V 1056M

TORQUES (LB-FT): PO=197 PU=91.4 LR=115 LRA=173

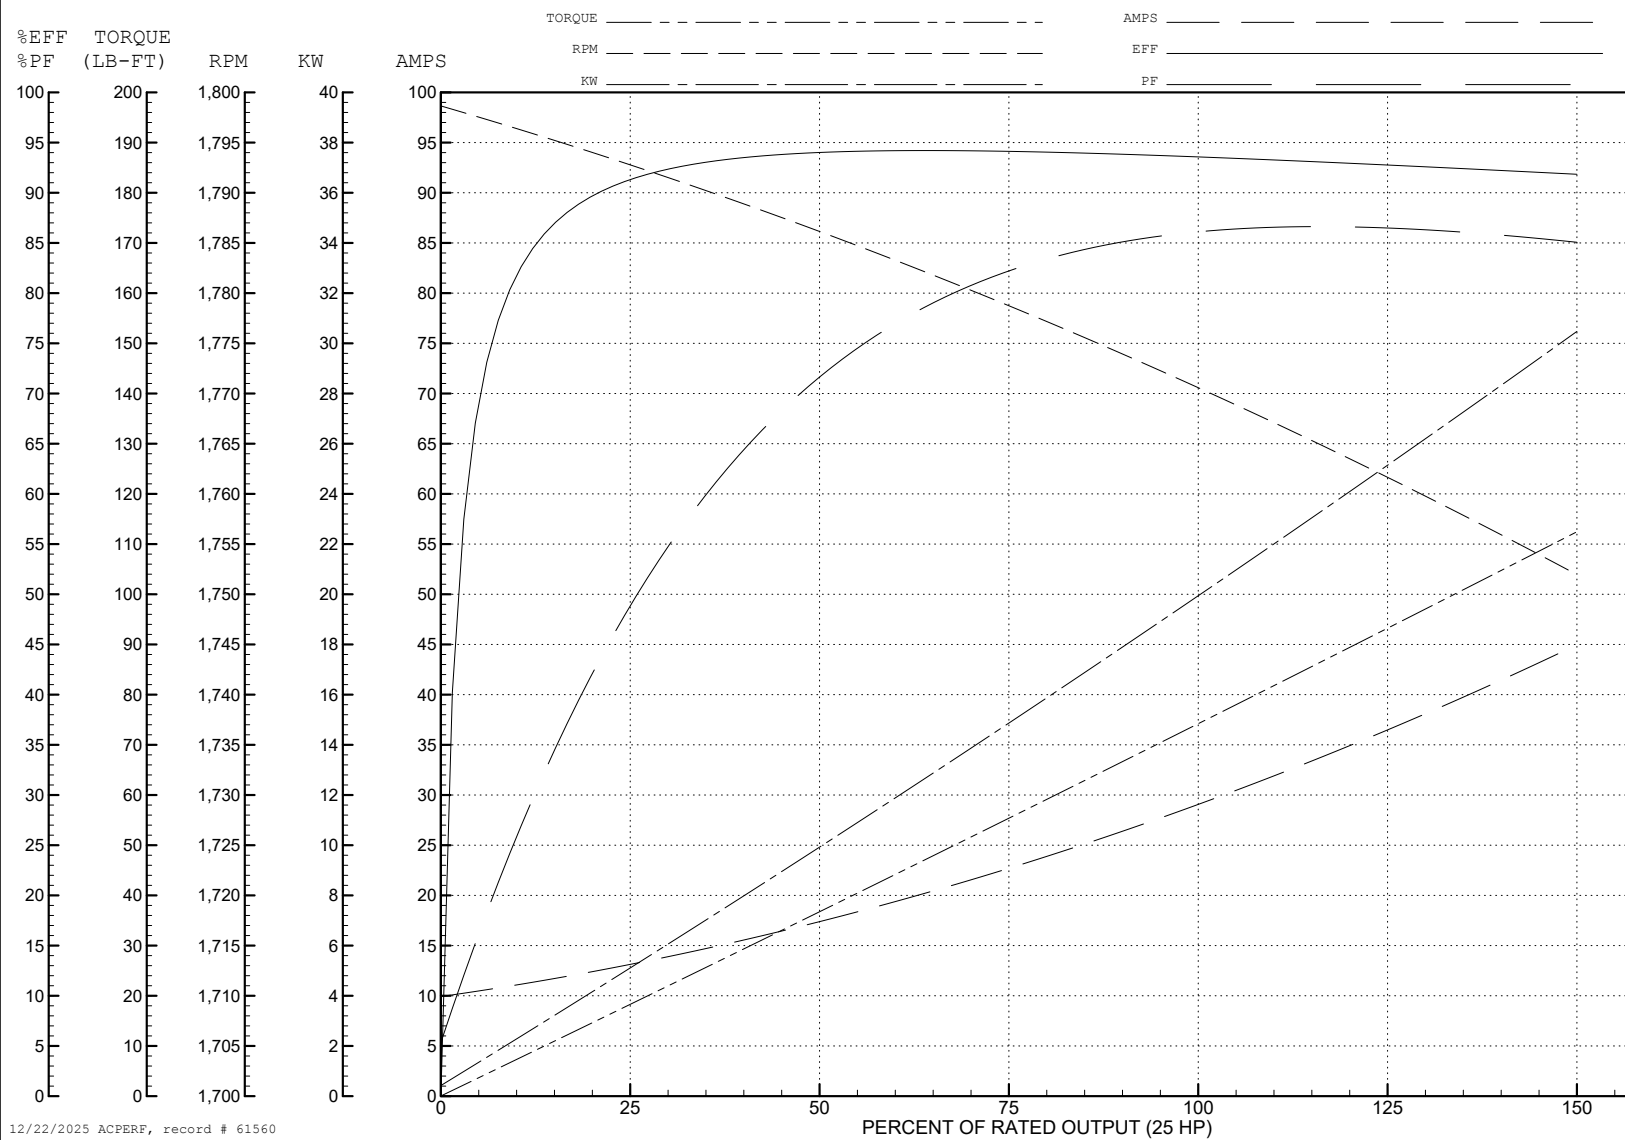

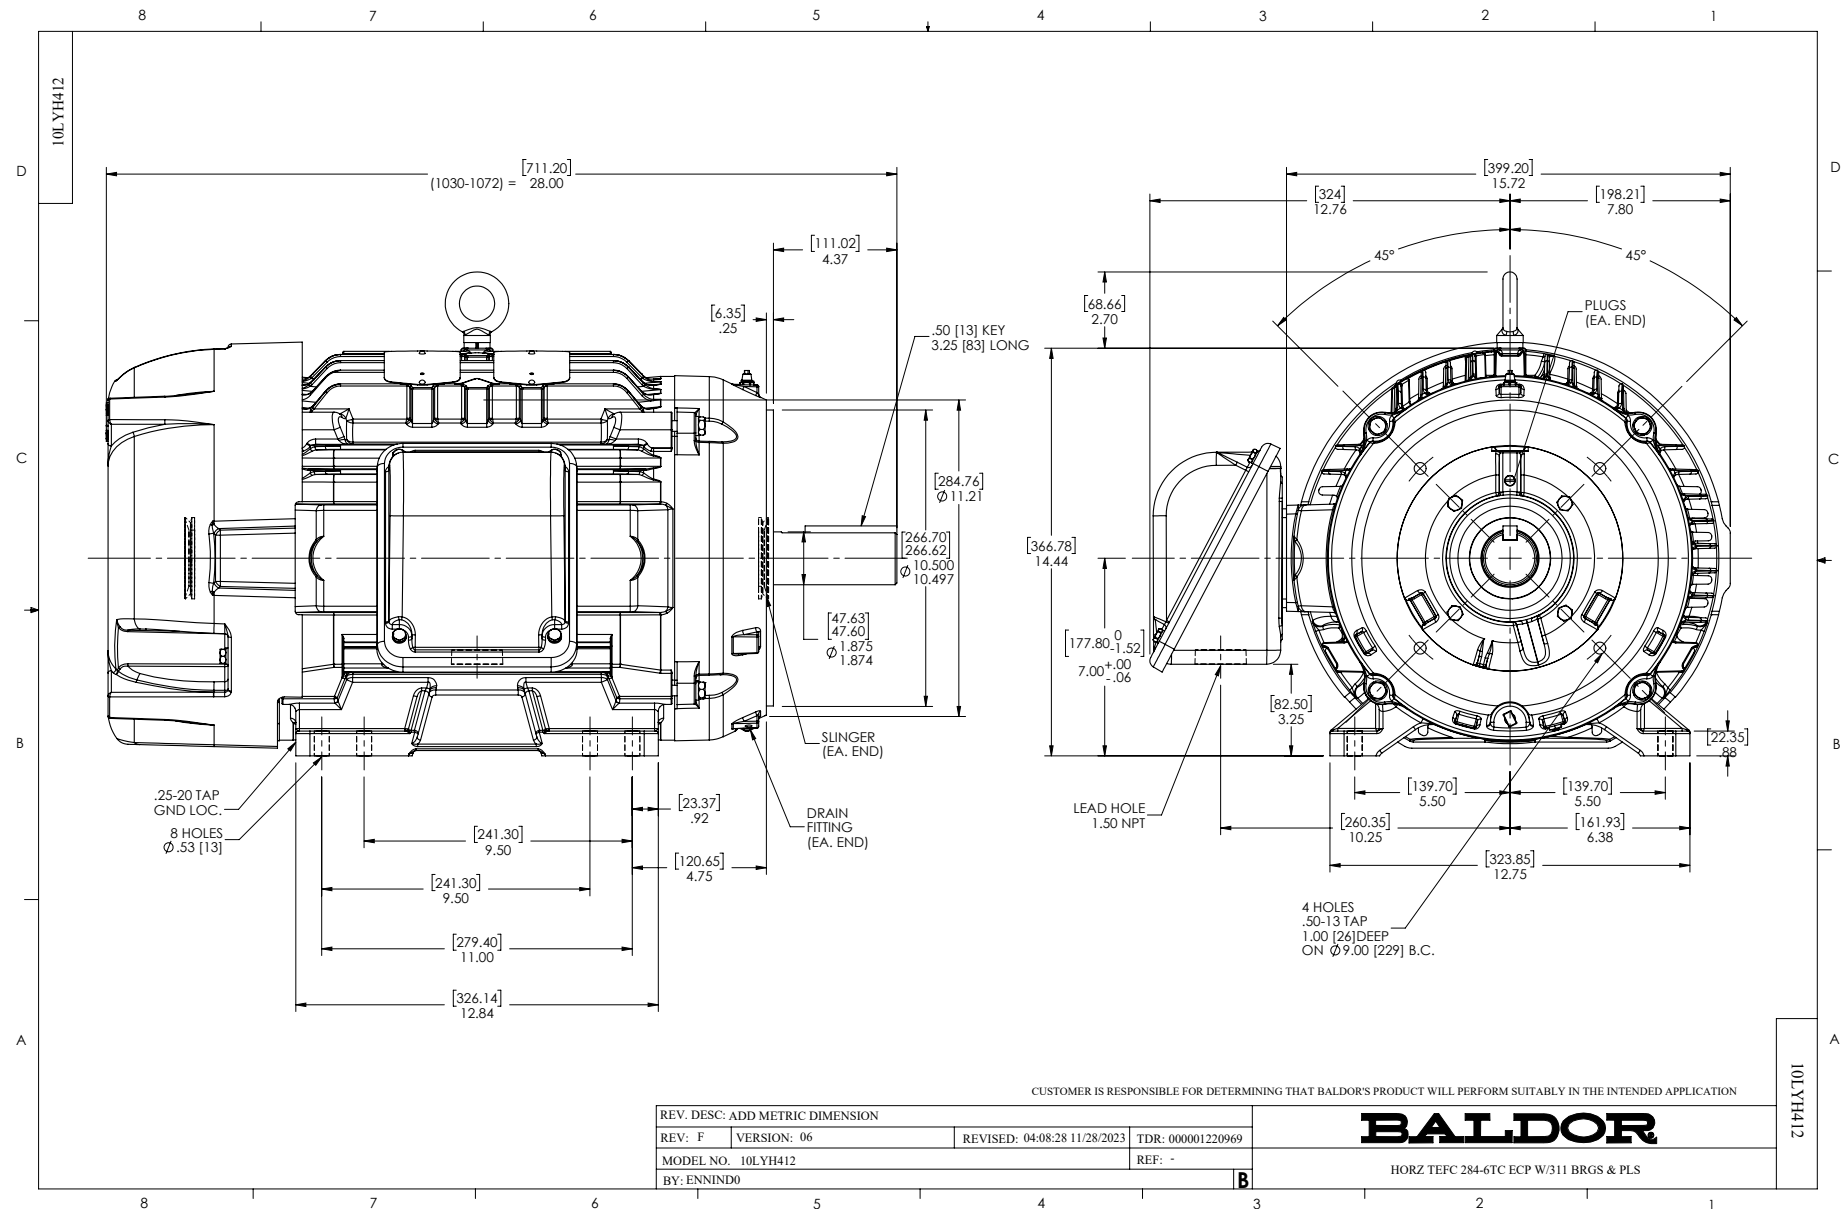

CD0006



- NOTES:
- 1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
 - 2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
 - 3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
 - 4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
 - 5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007		
REV. LTR: E	VERSION: 01	TDR: 000001099922
FILE: \AAA\00005\141	REVISED: 10: 24: 49 02/19/2019	BY: ENBRIRO
MTL: —		

BALDOR - RELIANCE®

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1