



Customer information packet

CECP82276T-4

7.5HP, 1180RPM, 3PH, 60HZ, 254TC, TEFC, F1

Class - CLI GP A,B,C,D

Division - Division II

Specifications

Enclosure	TEFC
Frame	254TC
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CL I GP A,B,C,D
Haz Area Division	Division II
Motor Letter Type	Three Phase
Output @ Frequency	7.500 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	CCSA US CSA EEV NEMA PREMIUM NEMA_PREMIUM UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	1
Current @ Voltage	10.500 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	91.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Enclosure Modification	841
Feedback Device	NO FEEDBACK
Haz Area Temp Code	T3C

Part detail

Revision	K
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	09WGZ222
Layout	09LY-000-401
Eff. date	11-14-2023
CD Diagram	CD0006
Poles	06
Leads	3#12
Proprietary	False
Created date	01-27-2019

Heater Indicator	No Heater
High Voltage Full Load Amps	10.5 a
Insulation Class	F
Inverter Code	Inverter Duty
IP Rating	IP56
KVA Code	H
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	1800 rpm
Motor Lead Termination	Ring Terminals
Motor Standards	NEMA
Motor Type	0954M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	25.28 IN
Power Factor	71
Product Family	Chem Process S/P 32-8 IEEE 841
Pulley Face Code	C-Face
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Speed	1180 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP4332

STK.NO.	CECP82276T-4			P/N				ENCLOSURE	TEFC	
SPEC.	09-0000-0975			CC	010A	FRAME	254TC	S/N		
HP	7.5			CLASS	F	HZ	60	ODE BRG	6309	DE BRG 6309
RPM	1180	RPM MAX	1800	PH	3	DES	B	D.E. BRG.	45BC03X30X	
VOLT	460			KVA-CODE	H			O.D.E. BRG.	45BC03X30X	
AMP	10.5			MOTOR WEIGHT		346		GREASE	POLYREX EM	
RATING	40C AMB-CONT			MAX. KVAR		4		BLANK		
NEMA-NOM-EFF	91	# OF ROTOR BARS			27	SER.F.	1.15	IP	56	
G.MIN.EFF	89.5	# OF STATOR SLOTS			36	PF	71	INV.TYPE	PWM	
TEMP CODE	T3C	INVERTER-TEMP-CODE			180					
TEMP =	160	C HP FR	60	C HP TO	90					
CT HZ FROM	1	CT HZ TO	60							
HTR-VOLTS		HTR-AMPS		HTR-WATTS				MAX. SPACE HEATER TEMP.		VT HZ FROM O VT HZ TO 60

AC Induction Motor Performance Data

Record # 47082

Typical performance - not guaranteed values

Winding: 09WGZ222-R018				Type: 0954M		Enclosure: TEFC	
Nameplate Data				460 V, 60 Hz: Single Voltage Motor			
Rated Output (HP)		7.5		Full Load Torque		32.4 LB-FT	
Volts		460		Start Configuration		direct on line	
Full Load Amps		10.5		Breakdown Torque		92 LB-FT	
R.P.M.		1180		Pull-up Torque		36.5 LB-FT	
Hz		60		Phase		3	
NEMA Design Code		B		KVA Code		H	
Service Factor (S.F.)		1.15		No-load Current		5.39 A	
NEMA Nom. Eff.		91		Power Factor		71	
Rating - Duty		40C		AMB-CONT		Temp. Rise @ Rated Load	
S.F. Amps						Temp. Rise @ S.F. Load	
						Locked-rotor Power Factor	
						Rotor inertia	

Load Characteristics 460 V, 60 Hz, 7.5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	34	54	65	71	74	75	73
Efficiency	83.5	90.2	91.2	91.3	91.8	90.8	91.8
Speed	1196	1191	1188	1180	1177	1171	1179
Line amperes	5.92	7.13	8.57	10.5	12.7	15.6	11.8


ABB Motors and Mechanical Inc.


WINDING # 09WGZ222

Typical performance - not guaranteed values.



7.5 HP 3 PH 60 HZ 1180 RPM 460 V 0954M

TORQUES (LB-FT): PO=92 PU=36.5 LR=53.6 LRA=64.6

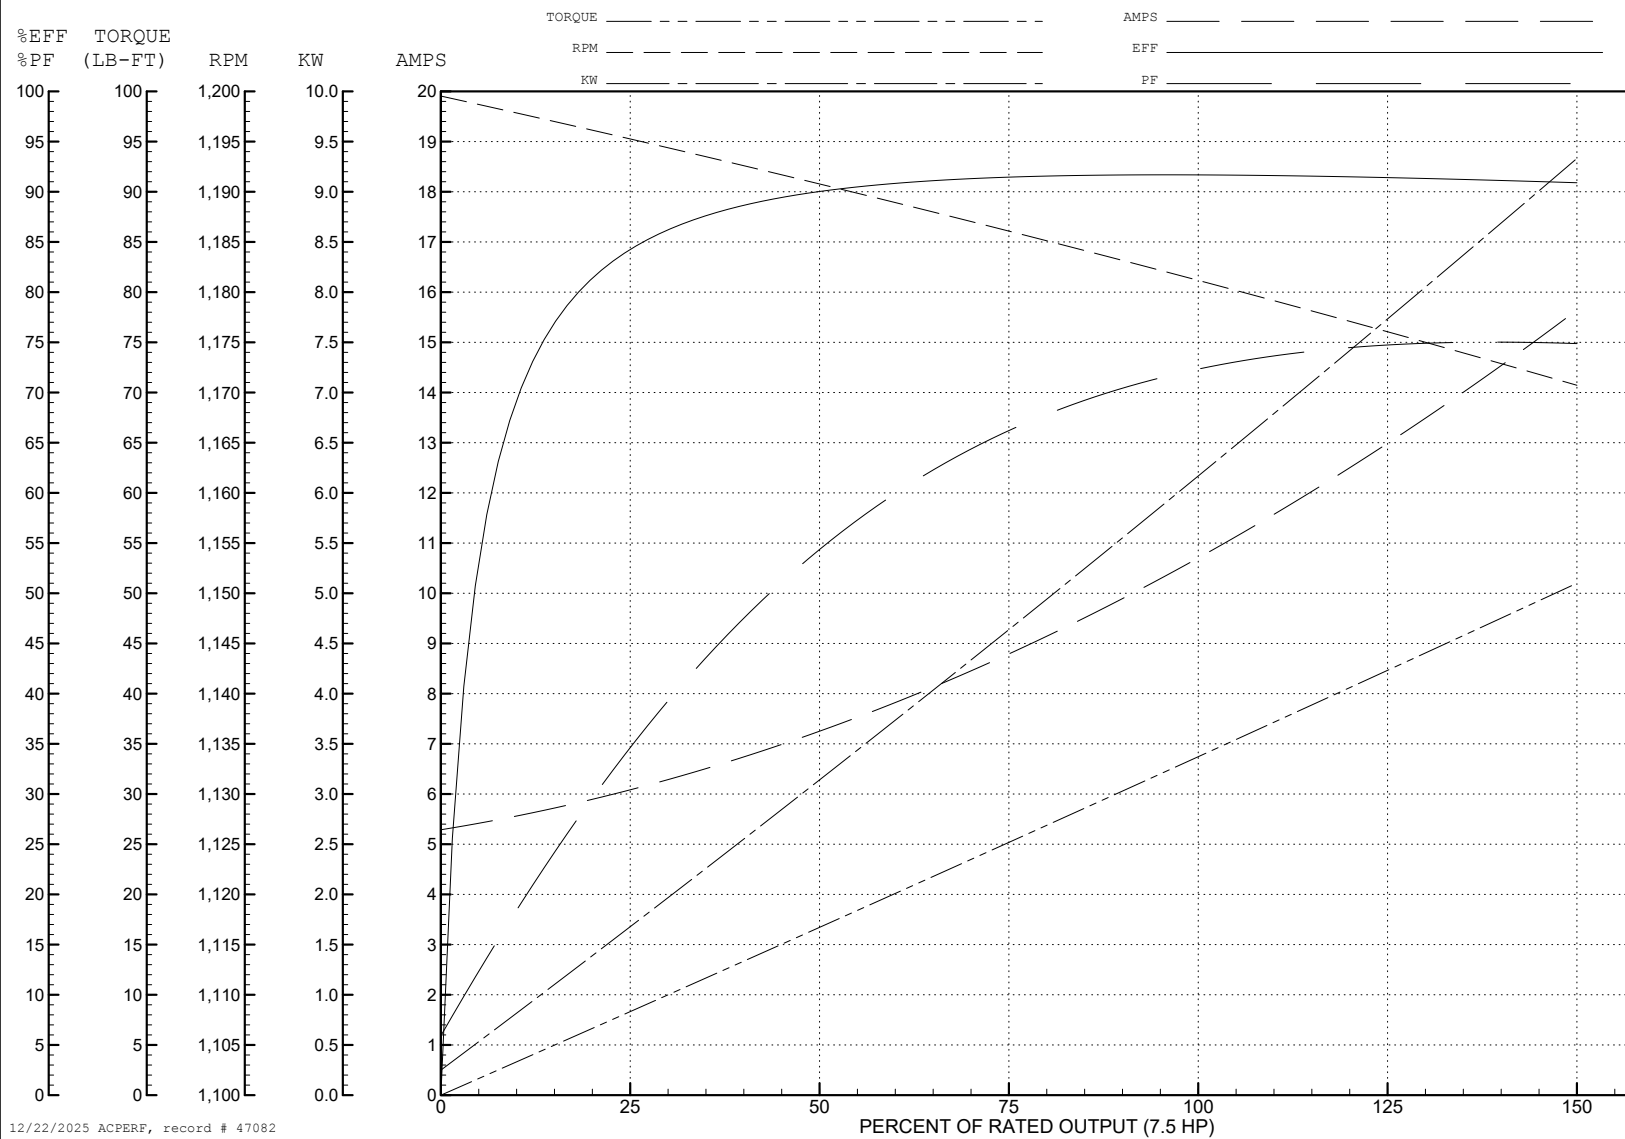



CD0006

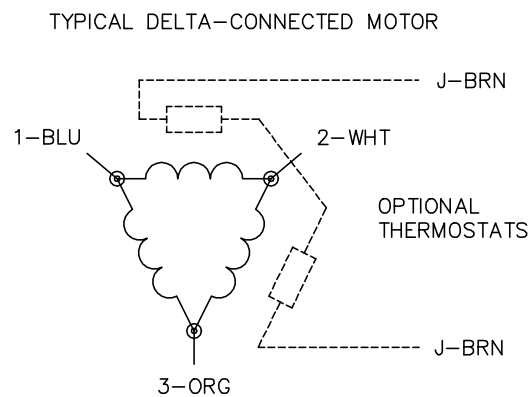

NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007		
REV. LTR: E	VERSION: 01	TDR: 000001099922
FILE: \AAA\00005\141	REVISED: 10: 24: 49 02/19/2019	BY: ENBRIRO
MTL: —		

BALDOR - RELIANCE®

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1