



Customer information packet

CECP82332T-4

10HP, 1180RPM, 3PH, 60HZ, 256TC, TEFC, F1

Class - CLI GP A,B,C,D

Division - Division II

Specifications

Enclosure	TEFC
Frame	256TC
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CL I GP A,B,C,D
Haz Area Division	Division II
Motor Letter Type	Three Phase
Output @ Frequency	10.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	CCSA US CSA EEV NEMA PREMIUM NEMA_PREMIUM UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	0-
Current @ Voltage	14.100 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	91.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Enclosure Modification	841
Feedback Device	NO FEEDBACK
Haz Area Temp Code	T3C

Part detail

Revision	L
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	09WGZ105
Layout	09LY-000-401
Eff. date	11-14-2023
CD Diagram	CD0006
Poles	06
Leads	3#12
Proprietary	False
Created date	01-27-2019

Heater Indicator	No Heater
High Voltage Full Load Amps	14.1 a
Insulation Class	F
Inverter Code	Inverter Duty
IP Rating	IP56
KVA Code	H
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	1800 rpm
Motor Lead Termination	Ring Terminals
Motor Standards	NEMA
Motor Type	0960M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	25.28 IN
Power Factor	72
Product Family	Chem Process S/P 32-8 IEEE 841
Pulley Face Code	C-Face
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Speed	1180 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP4332

STK.NO.	CECP82332T-4				P/N				ENCLOSURE				TEFC			
SPEC.	09-0000-0976				CC	010A		FRAME		256TC		S/N				
HP	10				CLASS		F	HZ		60	ODE BRG		6309	DE BRG 6309		
RPM	1180	RPM MAX		1800	PH	3	DES		B	D.E. BRG.			45BC03X30X			
VOLT	460				KVA-CODE			H		O.D.E. BRG.			45BC03X30X			
AMP	14.2				MOTOR WEIGHT				362		GREASE		POLYREX EM			
RATING	40C AMB-CONT				MAX. KVAR				3.70		BLANK					
NEMA-NOM-EFF	91	# OF ROTOR BARS				27		SER.F.		1.15	IP	56				
G.MIN.EFF	89.5	# OF STATOR SLOTS				36		PF	72	INV.TYPE		PWM				
TEMP CODE	T3C		INVERTER-TEMP-CODE				180									
TEMP =	160	C HP FR	60	C HP TO		90										
CT HZ FROM	0-	CT HZ TO		60												
HTR-VOLTS		HTR-AMPS			HTR-WATTS					MAX. SPACE HEATER TEMP.					VT HZ FROM 0-	VT HZ TO 60

AC Induction Motor Performance Data

Record # 47079

Typical performance - not guaranteed values

Winding: 09WGZ105-R013			Type: 0960M		Enclosure: TEFC		
Nameplate Data				460 V, 60 Hz: Single Voltage Motor			
Rated Output (HP)		10		Full Load Torque		44.3 LB-FT	
Volts		460		Start Configuration		direct on line	
Full Load Amps		14.1		Breakdown Torque		121 LB-FT	
R.P.M.		1180		Pull-up Torque		50.6 LB-FT	
Hz	60	Phase	3	Locked-rotor Torque		67 LB-FT	
NEMA Design Code		B	KVA Code	H	Starting Current		81 A
Service Factor (S.F.)		1.15		No-load Current		6.84 A	
NEMA Nom. Eff.		91	Power Factor	72	Line-line Res. @ 25°C		0.754 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		38°C	
S.F. Amps				Temp. Rise @ S.F. Load		47°C	
				Locked-rotor Power Factor		24.9	
				Rotor inertia		4.82 LB-FT2	

Load Characteristics 460 V, 60 Hz, 10 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	36	57	67	72	74	75	73
Efficiency	86.2	91.1	91.9	91.7	90.8	89.5	91.2
Speed	1195	1191	1186	1181	1174	1166	1177
Line amperes	7.45	9.13	11.4	14.1	17.3	21.1	16


ABB Motors and Mechanical Inc.


WINDING # 09WGZ105

Typical performance - not guaranteed values.




10 HP 3 PH 60 HZ 1180 RPM 460 V 0960M

TORQUES (LB-FT): PO=121 PU=50.6 LR=67 LRA=81

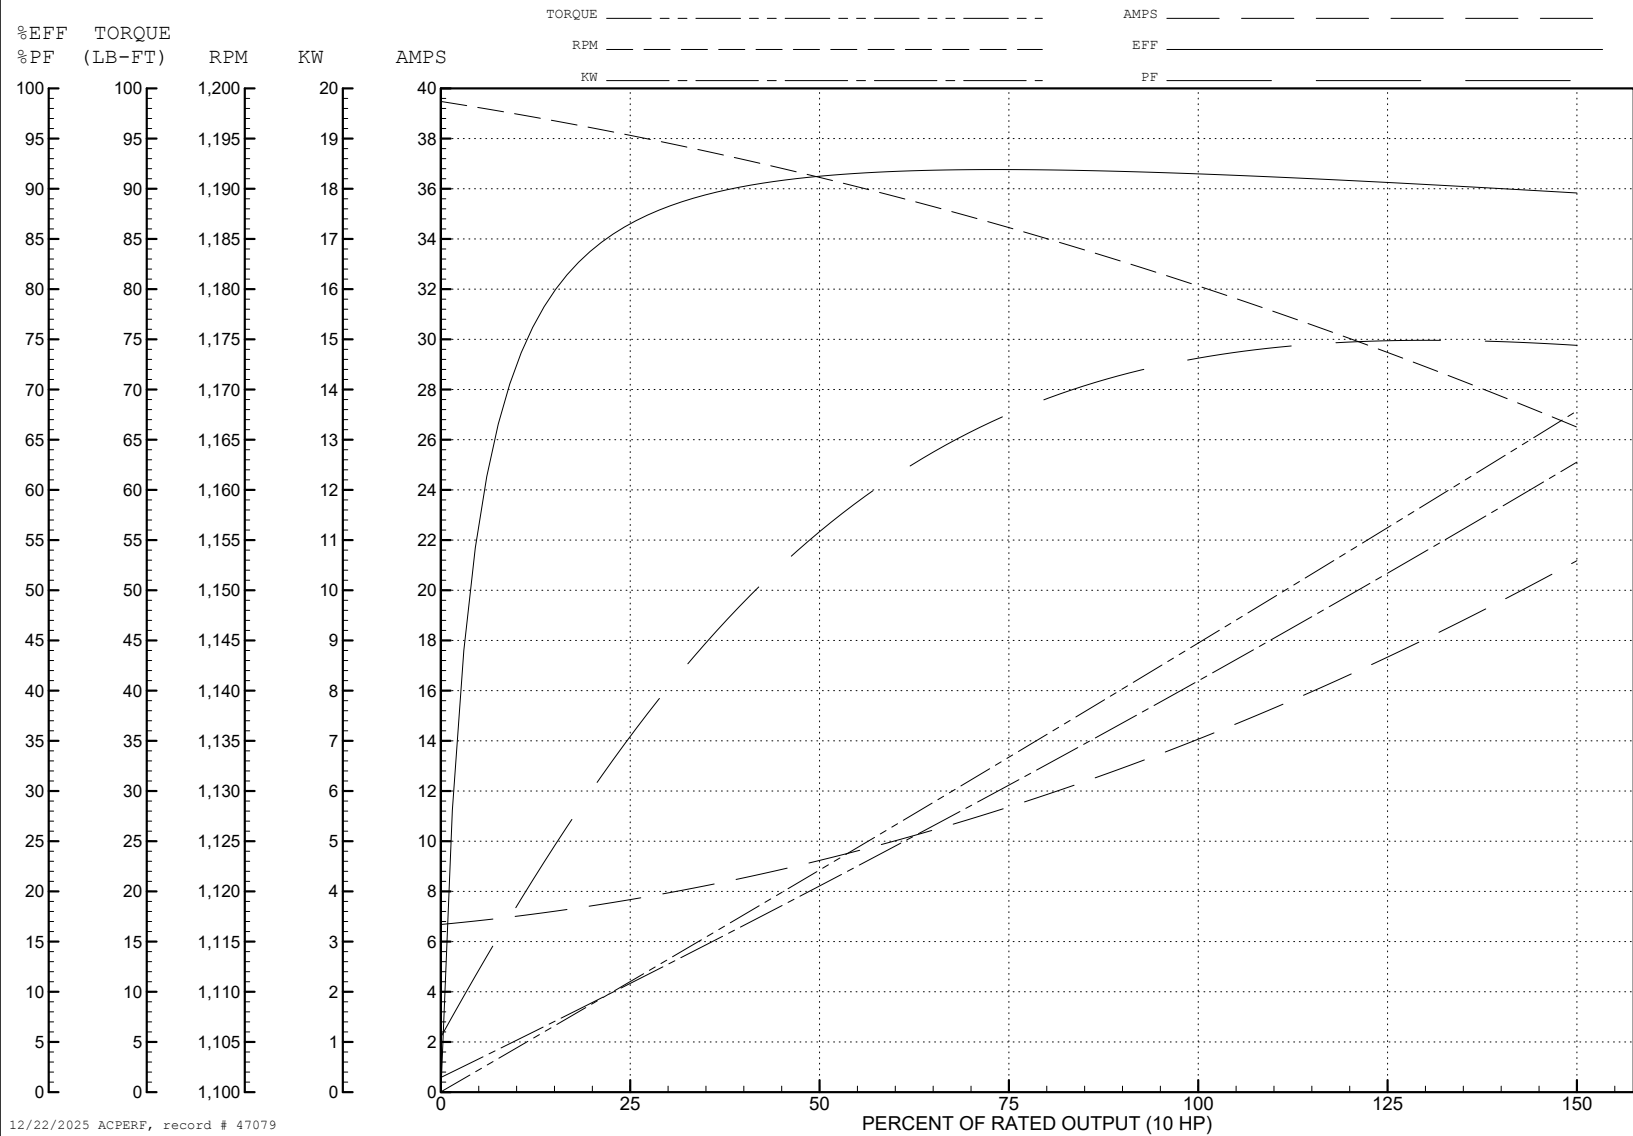

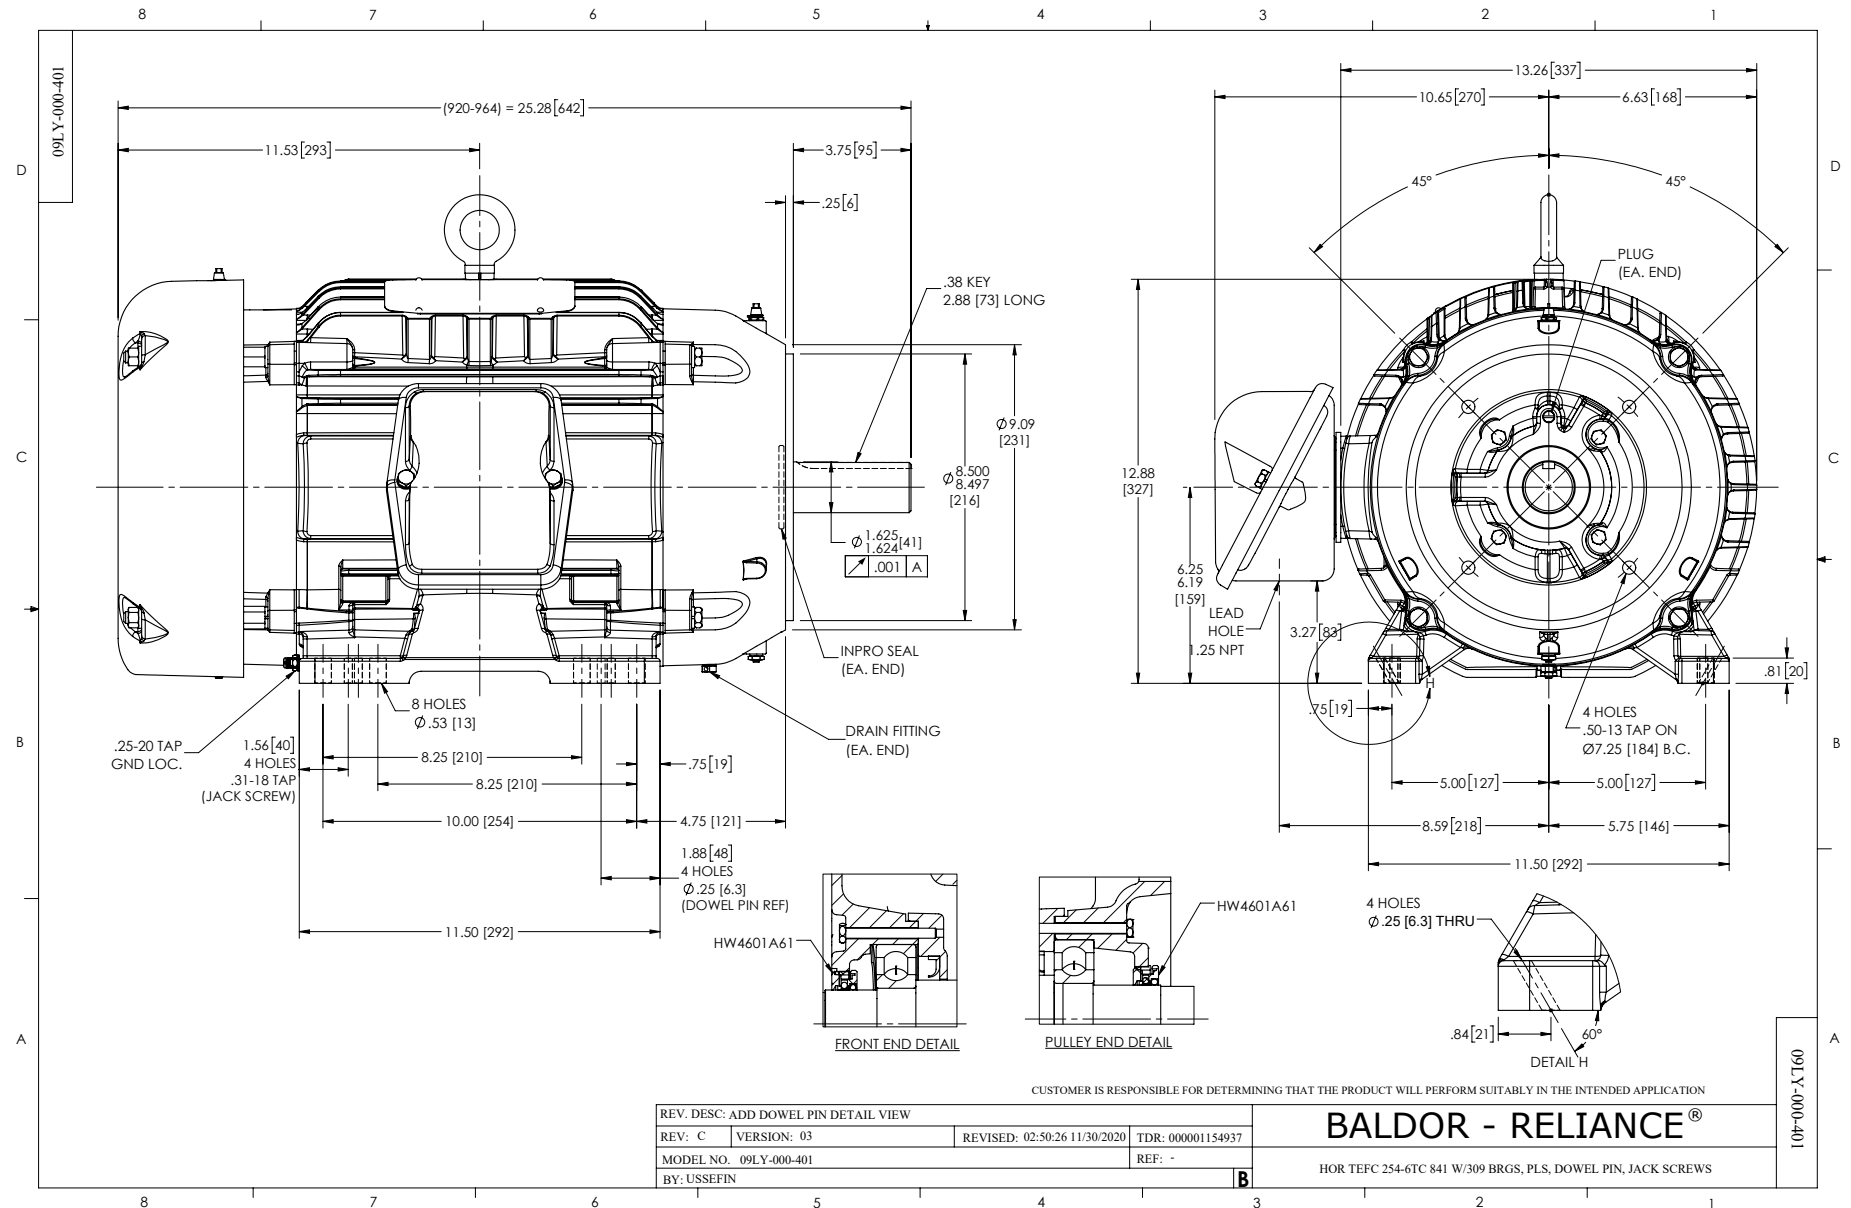

CD0006

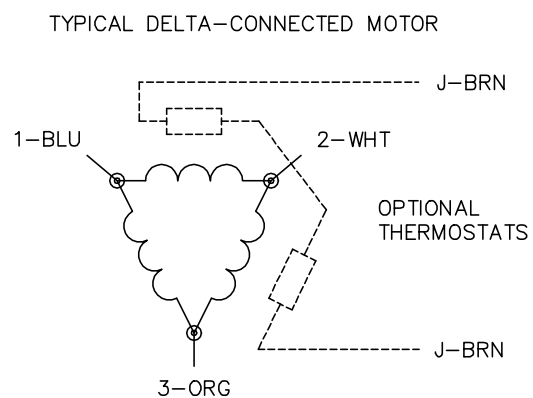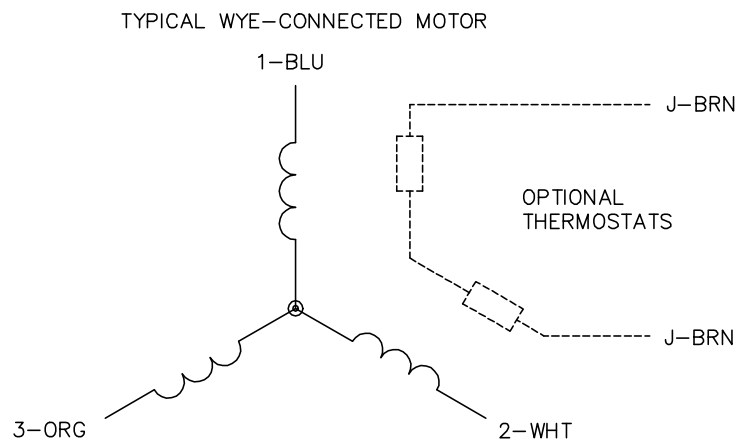

NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007

REV. LTR: E

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\141

REVISED: 10:24:49 02/19/2019

BY: ENBRIRO

MTL: —

**BALDOR - RELIANCE®**

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1