



Customer information packet

CEM2506T

7.5HP, 1180RPM, 3PH, 60HZ, 254TC, OPSB, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	OPSB
Frame	254TC
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	7.500 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	CURUSEEV NEMA PREMIUM
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	11.000 A @ 460.0 V 22.400 A @ 230.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	90.2 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Heater Indicator	No Heater
High Voltage Full Load Amps	11.0 a
Insulation Class	F
Inverter Code	Inverter Ready

Part detail

Revision	J
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	39WGX747
Layout	39LYD102
Eff. date	12-12-2025
CD Diagram	CD0180
Poles	06
Leads	9#12
Proprietary	False
Created date	02-20-2020

IP Rating	NONE
KVA Code	H
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3950M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	23.19 IN
Power Factor	70
Product Family	General Purpose
Pulley Face Code	C-Face
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Speed	1180 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1259L											
CAT.NO.	CEM2506T										
SPEC.	39-0000786										
HP	7.5										
VOLTS	230/460										
AMP	22.4/11										
RPM	1180										
FRAME	254TC		HZ	60				PH	3		
SER.F.	1.15	CODE	H	DES	A	CL	F				
NEMA-NOM-EFF	90.2	PF	70								
RATING	40C AMB-CONT										
CC	010A										
DE	6309		ODE	6208							
ENCL	OPSB	SN									

AC Induction Motor Performance Data

Record # 70940

Typical performance - not guaranteed values

Winding: 39WGX747-R001			Type: 3950M		Enclosure: OPSB		
Nameplate Data			460 V, 60 Hz: High Voltage Connection				
Rated Output (HP)		7.5	Full Load Torque		33.36 LB-FT		
Volts		230/460	Start Configuration		direct on line		
Full Load Amps		22.8/11.4	Breakdown Torque		110 LB-FT		
R.P.M.		1180	Pull-up Torque		42.6 LB-FT		
Hz	60	Phase	3	Locked-rotor Torque		61.2 LB-FT	
NEMA Design Code		A	KVA Code	K	Starting Current		76.9 A
Service Factor (S.F.)		1.15		No-load Current		6.51 A	
NEMA Nom. Eff.		90.2	Power Factor	68	Line-line Res. @ 25°C		1.0034 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		27°C	
S.F. Amps				Temp. Rise @ S.F. Load		32°C	
				Locked-rotor Power Factor		26.3	

Load Characteristics 460 V, 60 Hz, 7.5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	30	49	61	68	72	74	70
Efficiency	82	88.7	90.4	90.7	90.4	89.6	90.5
Speed	1195.7	1192.4	1188.2	1183.9	1179.4	1174.3	1181
Line amperes	6.99	8.06	9.59	11.4	13.5	15.9	12.7


ABB Motors and Mechanical Inc.


WINDING # 39WGX747

Typical performance - not guaranteed values.


7.5 HP 3 PH 60 HZ 1180 RPM 460 V 3950M

TORQUES (LB-FT): PO=110 PU=42.6 LR=61.2 LRA=76.9

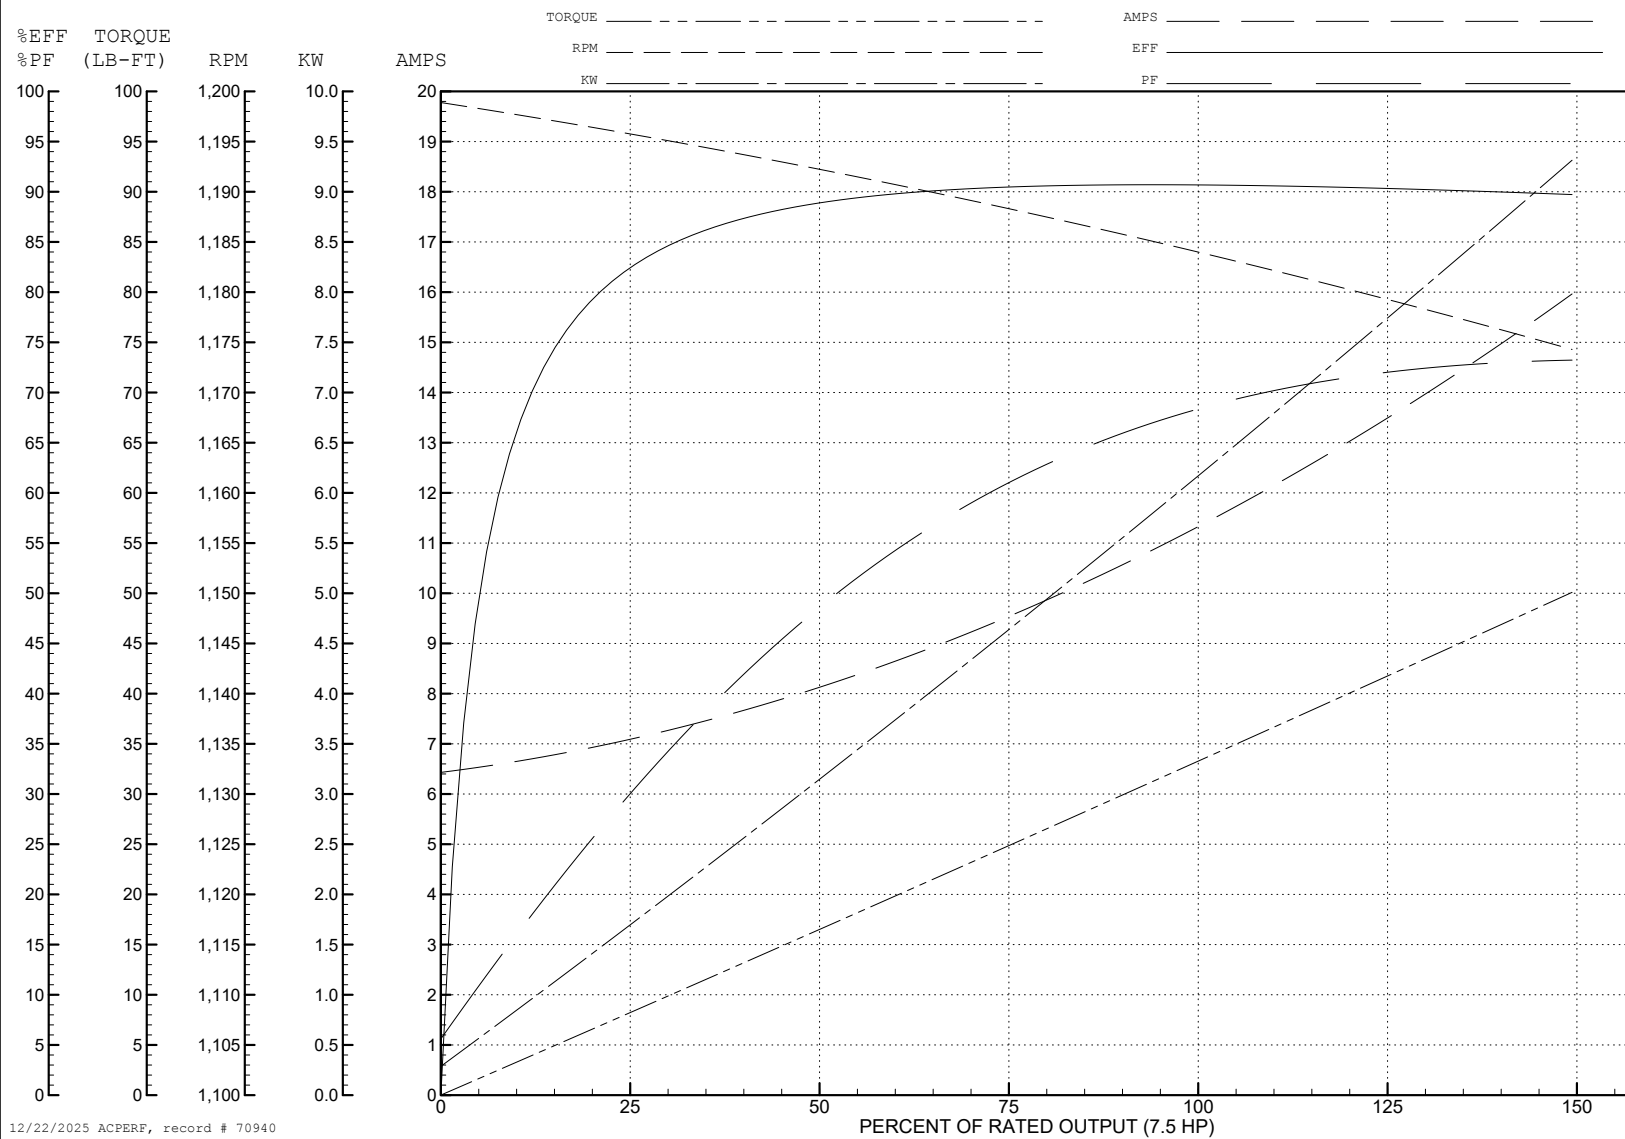

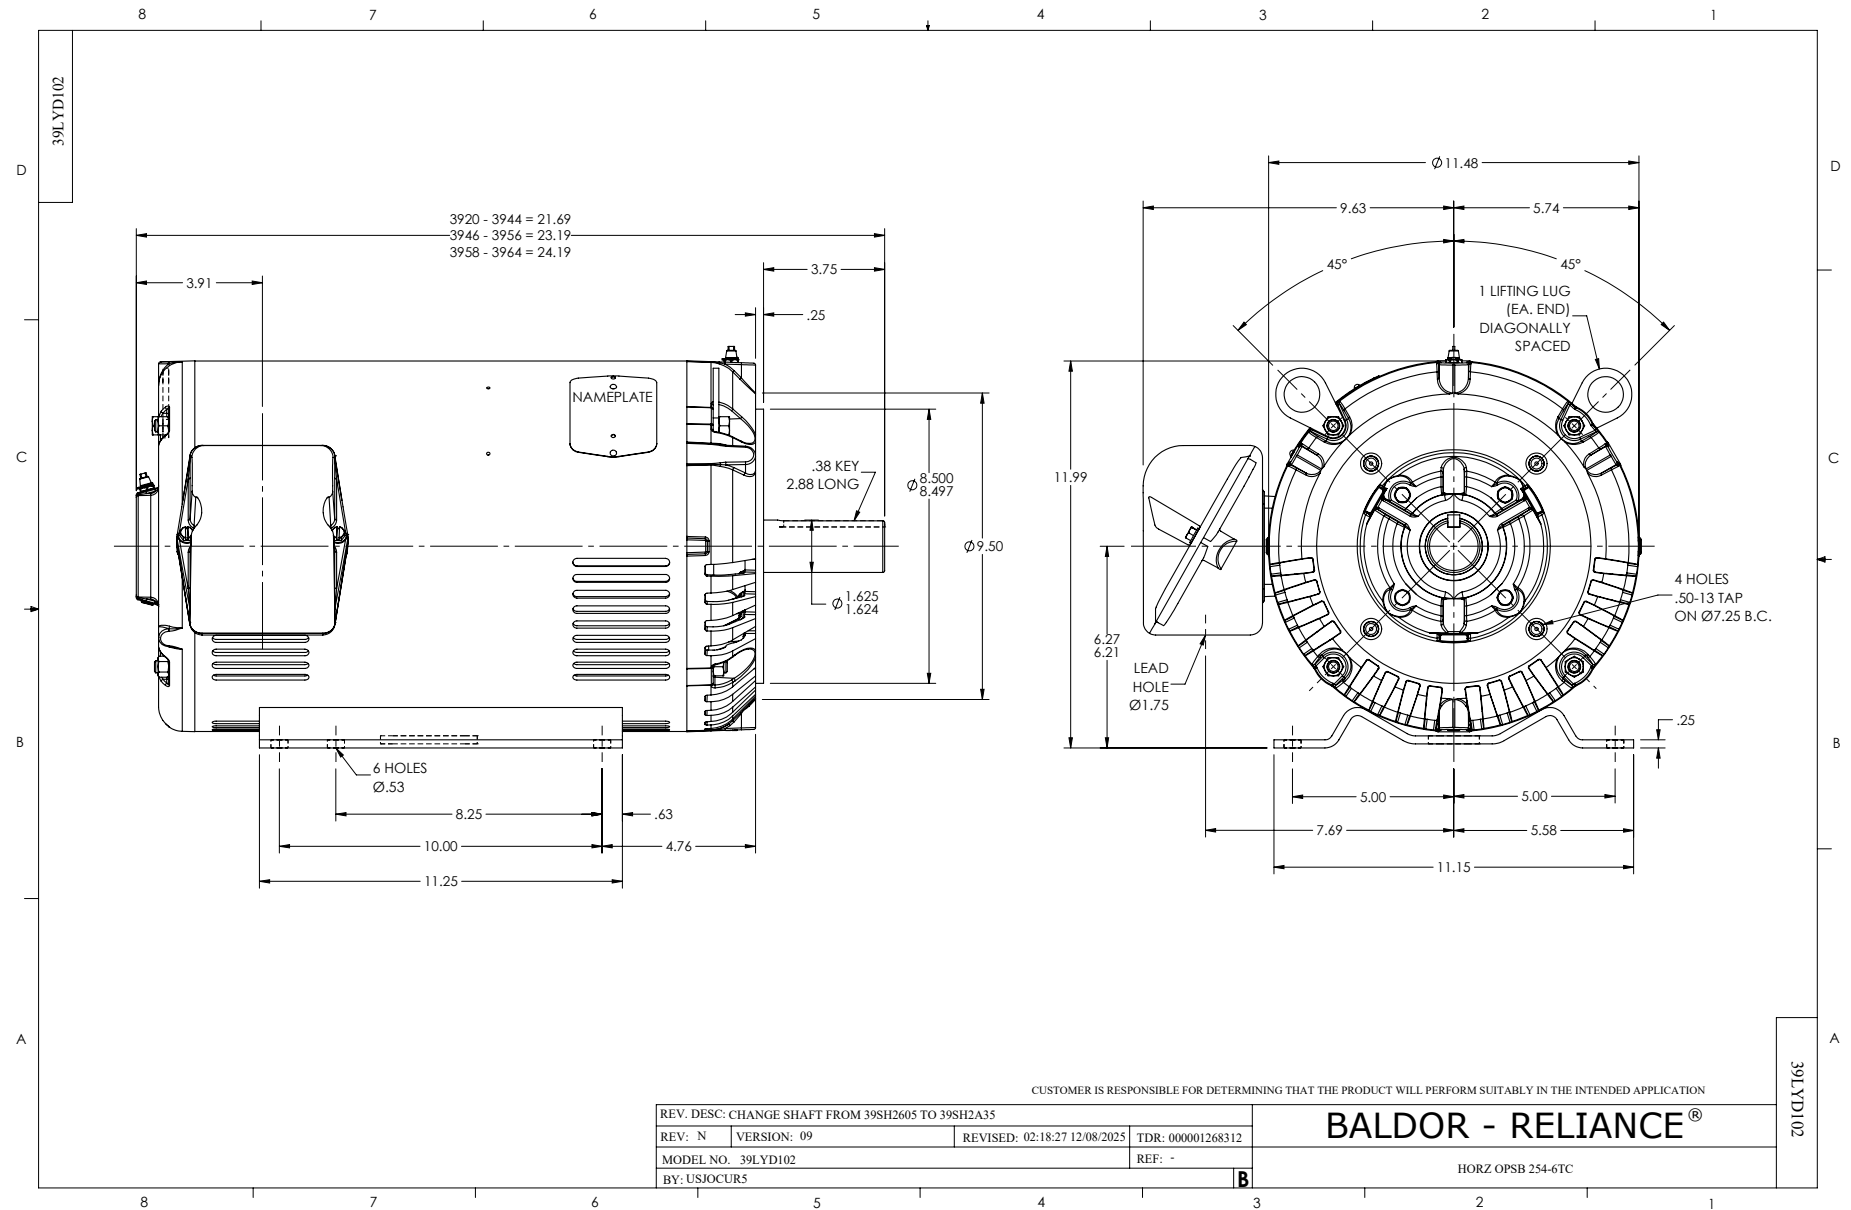

CD0180

LOW VOLTAGE
(2D)HIGH VOLTAGE
(1D)

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0180

REV. DESC: ADD CLASS CONN00000007

REV. LTR: D

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\148

REVISED: 10: 25: 29 02/19/2019

BY: ENBRIRO

MTL: —

**BALDOR - RELIANCE®**

3PH, DV, 9 LEADS, DELTA CONNECTION

SH 1 of 1