



Customer information packet

CEM2547T-G

60HP, 1775RPM, 3PH, 60HZ, 364TC, OPSB, F1

Specifications

Enclosure	OPSB
Frame	364TC
Frame Material	Steel
Frequency	60.00 Hz
Motor Letter Type	Three Phase
Output @ Frequency	60.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	CSA CSA EEV NEMA PREMIUM UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	136.000 A @ 230.0 V 68.000 A @ 460.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	95.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Heater Indicator	No Heater
High Voltage Full Load Amps	68.0 a
Insulation Class	H
Inverter Code	Inverter Ready

Part detail

Revision	G
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	42WGW587
Layout	42LY-000-019
Eff. date	05-29-2025
CD Diagram	CD0180
Poles	04
Leads	9#6
Proprietary	False
Created date	08-21-2019

IP Rating	NONE
KVA Code	G
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	4278M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	32.75 IN
Power Factor	87
Product Family	General Purpose
Pulley Face Code	C-Face
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	2.375 IN
Shaft Ground Indicator	Shaft Grounding
Shaft Rotation	Reversible
Speed	1775 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3554LUA											
CAT.NO.	CEM2547T-G			P/N						ENCL	OPSE
SPEC.	42-0000-0049	CC	010A	FRAME		364TC	SER.NO.				
HP	60		CLASS		H	HZ	60				
RPM	1775		PH	3	DES		A				
VOLTS	230/460			CODE		H	ODE BRG	6311	DE BRG	6313	
AMPS	138/69										
RATING	40C AMB-CONT		NEMA-NOM-EFF			95	GREASE	POLYREX EM			
PF	86	SER.F.	1.15	CT30-60(2:1) VT3-60(20:1)							
USABLE AT	50HZ 50HP 190/380V 140/70A			SF1.0							
HTR-VOLTS	HTR-AMPS	MAX. SPACE HEATER TEMP.									

AC Induction Motor Performance Data

Record # 17314

Typical performance - not guaranteed values

Winding: 42WGW587-R005				Type: 4278M		Enclosure: OPSB	
Nameplate Data				460 V, 60 Hz: High Voltage Connection			
Rated Output (HP)		60		Full Load Torque		178 LB-FT	
Volts		230/460		Start Configuration		direct on line	
Full Load Amps		138/69		Breakdown Torque		584 LB-FT	
R.P.M.		1775		Pull-up Torque		285 LB-FT	
Hz	60	Phase	3	Locked-rotor Torque		311 LB-FT	
NEMA Design Code		A	KVA Code	H	Starting Current		514 A
Service Factor (S.F.)		1.15		No-load Current		25.4 A	
NEMA Nom. Eff.		95	Power Factor	86	Line-line Res. @ 25°C		0.0911 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		38°C	
S.F. Amps				Temp. Rise @ S.F. Load		46°C	
				Locked-rotor Power Factor		26.2	
				Rotor inertia		10.4 LB-FT2	

Load Characteristics 460 V, 60 Hz, 60 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	51	72	81	85	86	87	86
Efficiency	92.4	94.9	95.3	95	94.6	93.9	94.8
Speed	1794	1789	1784	1779	1774	1768	1776
Line amperes	30.4	41	54.7	69.9	86.2	103	79.7


ABB Motors and Mechanical Inc.


WINDING # 42GW587

Typical performance - not guaranteed values.




60 HP 3 PH 60 HZ 1775 RPM 460 V 4278M

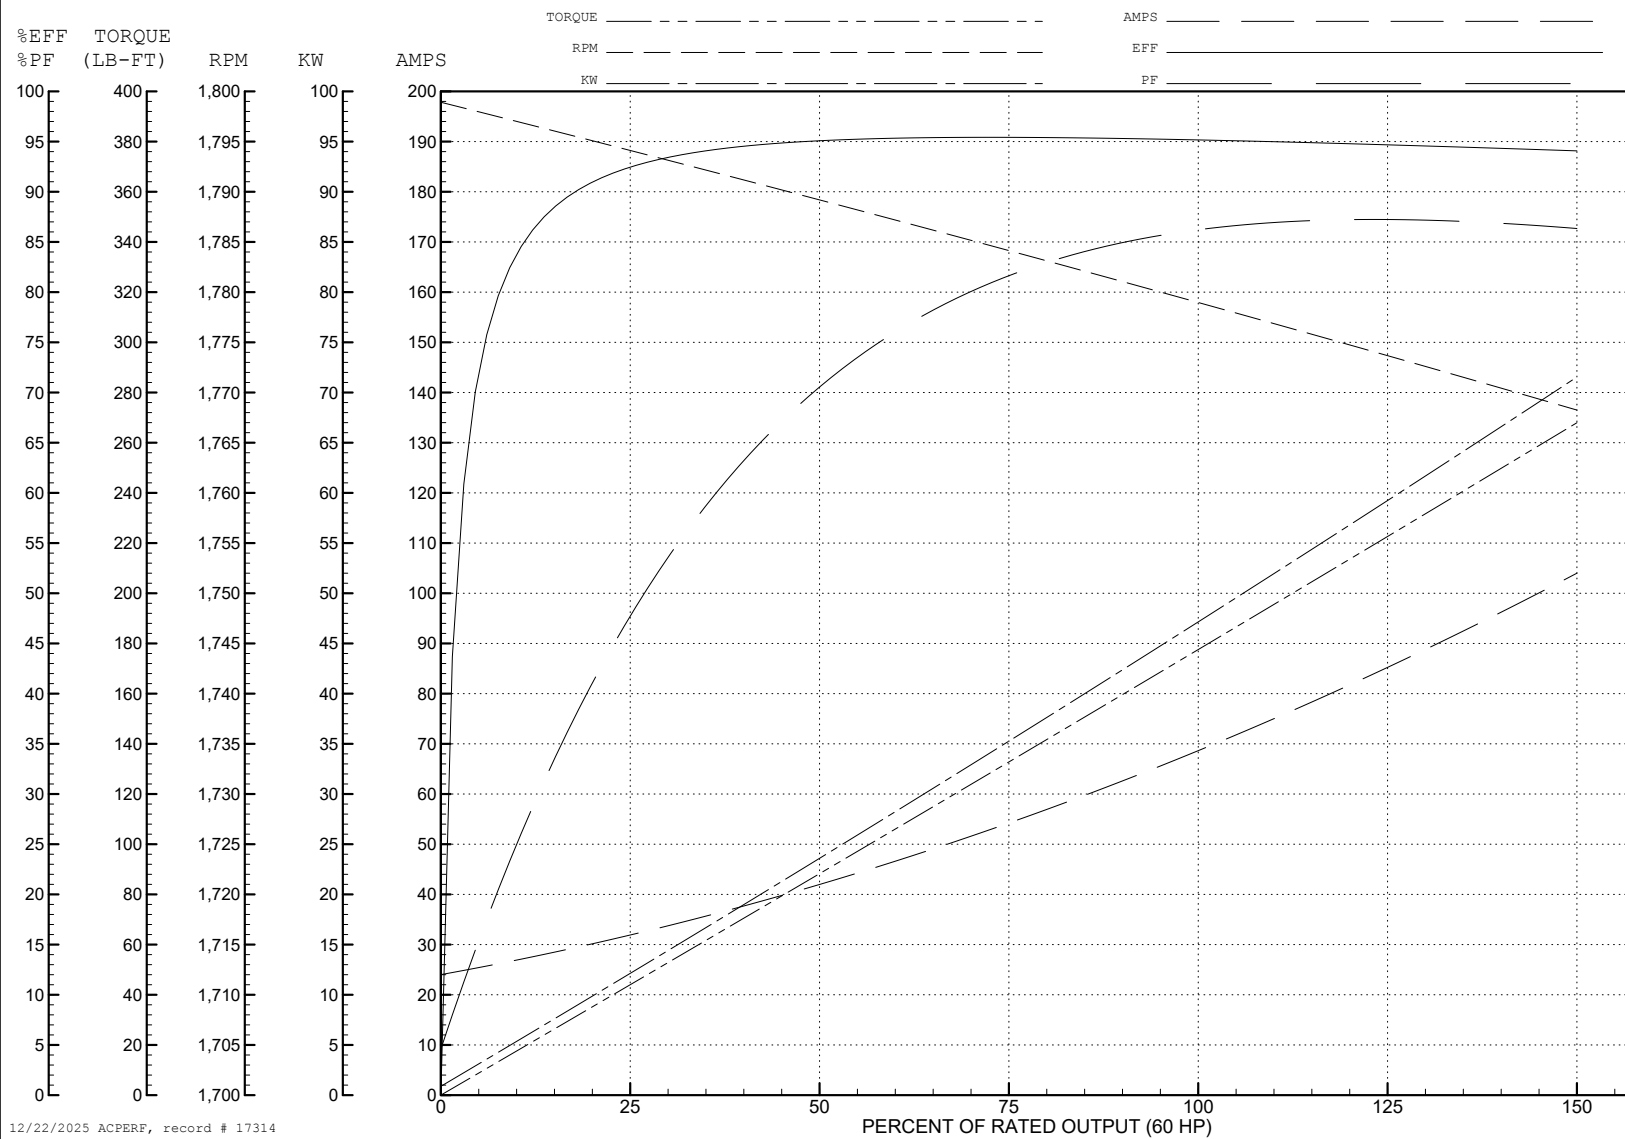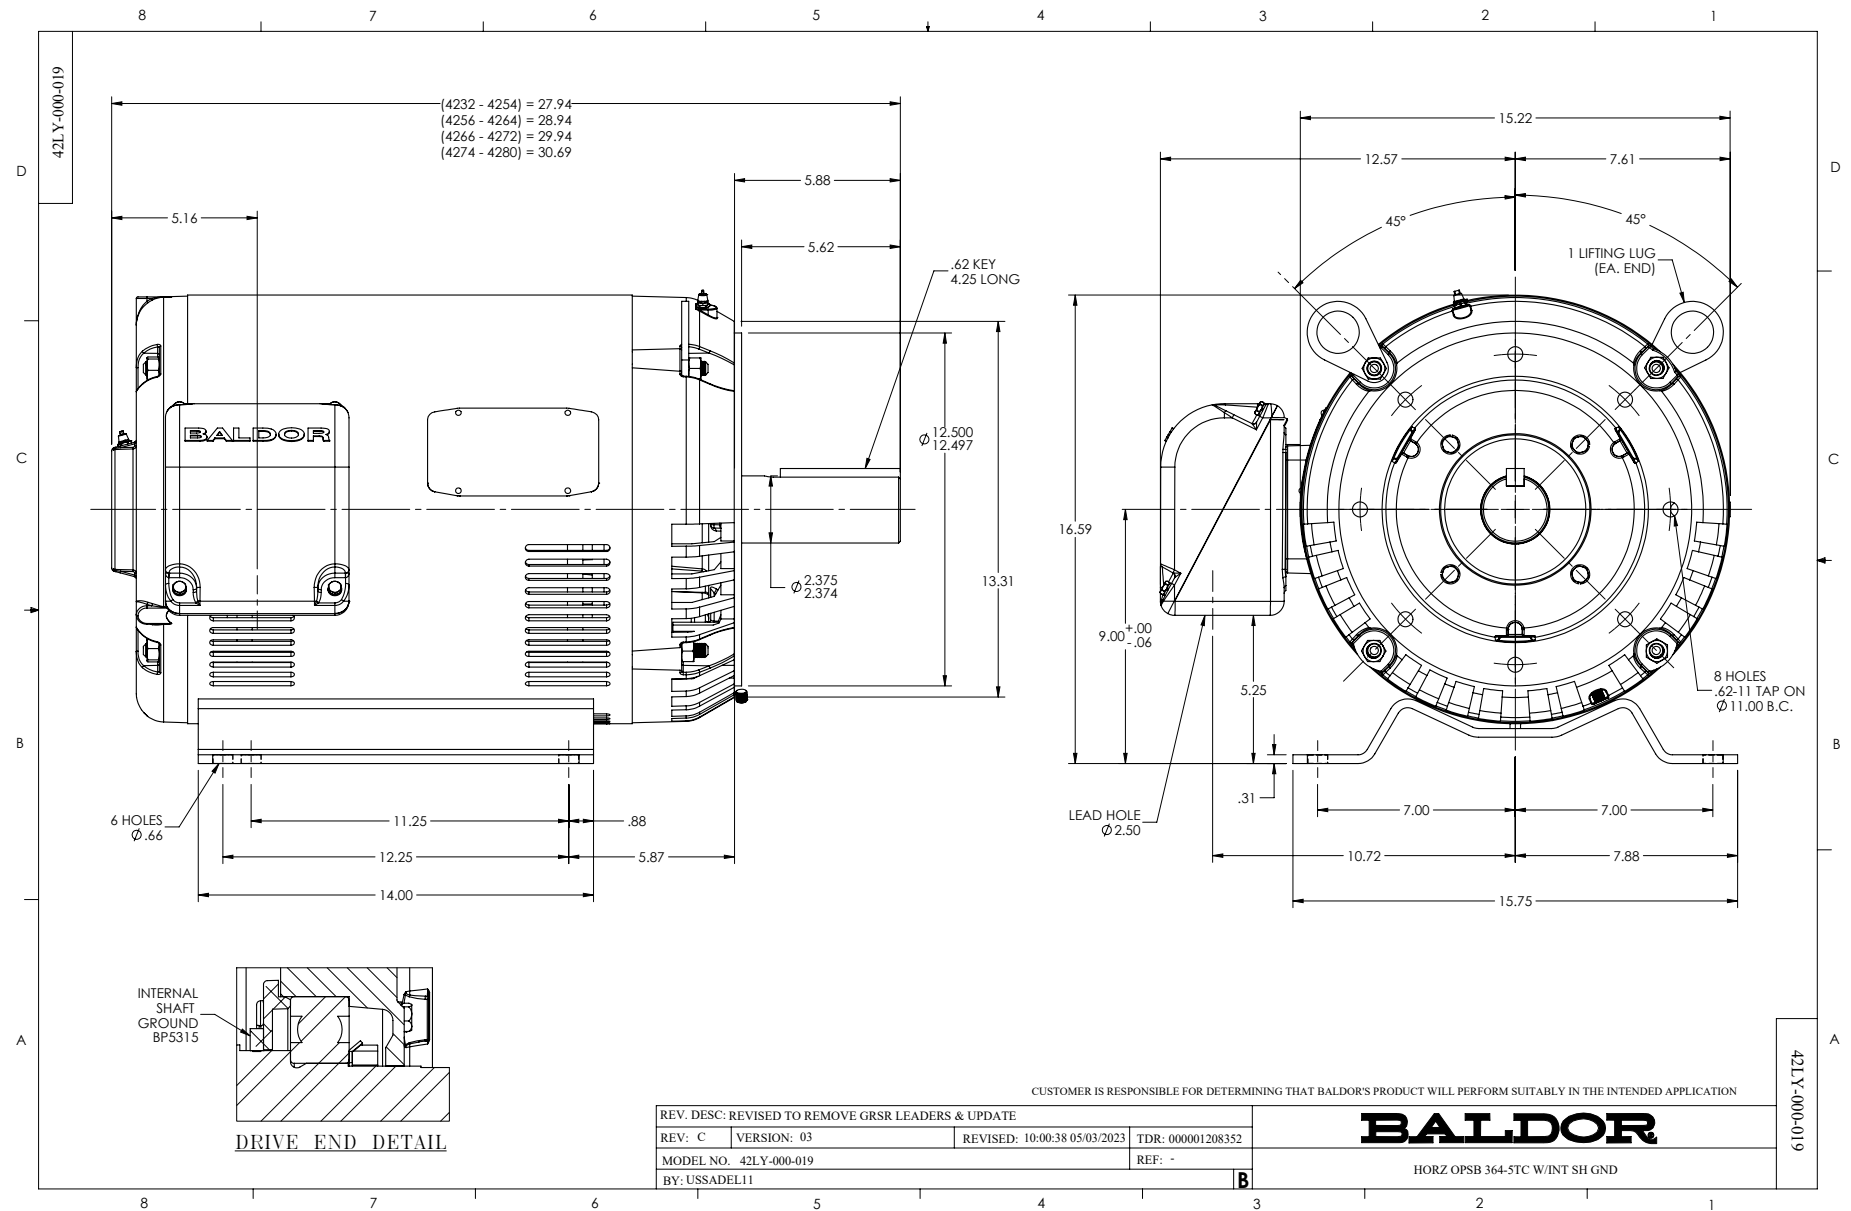TORQUES (LB-FT): PO=584 PU=285 LR=311 LRA=514





CD0180

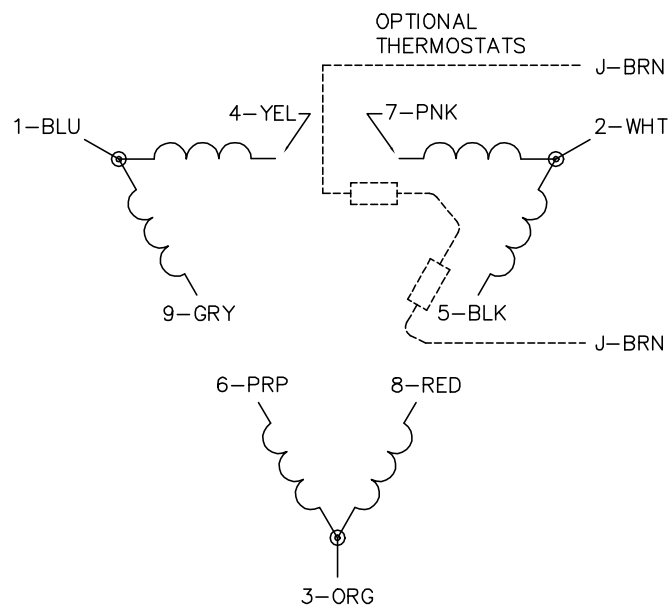LOW VOLTAGE
(2D)HIGH VOLTAGE
(1D)

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0180

REV. DESC: ADD CLASS CONN00000007

REV. LTR: D

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\148

REVISED: 10: 25: 29 02/19/2019

BY: ENBRI0

MTL: —

**BALDOR - RELIANCE®**

3PH, DV, 9 LEADS, DELTA CONNECTION

SH 1 of 1