



Customer information packet

CESSWDM3613T-5

5HP, 3480RPM, 3PH, 60HZ, 184TC, 3636M, TEFC, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	184TC
Frame Material	Stainless Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	5.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	575.0 V @ 60 HZ
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	4.630 A @ 575.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	90.2 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	4.6 a
Insulation Class	F
Inverter Code	Not Inverter
KVA Code	N
Lifting Lugs	No Lifting Lugs

Part detail

Revision	X
Type	AC
Mech. spec.	36L738
Base	
Status	PRD/A
Elec. spec.	36WGS840
Layout	36LYL738
Eff. date	11-24-2025
CD Diagram	CD0006
Poles	02
Leads	3#16
Proprietary	False
Created date	02-07-2013

Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	3 @ 16 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3636M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	18.32 IN
Power Factor	90
Product Family	Wash Down All Stainless Steel
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.125 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	3480 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1953B05											
CAT.NO.	CESSWDM3613T-5										
SPEC.	36L738S840G1										
HP	5										
VOLTS	575										
AMP	4.63										
RPM	3480										
FRAME	184TC			HZ		60		PH		3	
SER.F.	1.15		CODE		N	DES		A	CLASS		F
NEMA-NOM-EFF	90.2			PF		90					
RATING	40C AMB-CONT										
CC	010A			USABLE AT 208V					N/A		
DE	6206			ODE		6205					
ENCL	TEFC	SN									
	4:1CT 20:1VT										

AC Induction Motor Performance Data

Record # 50292

Typical performance - not guaranteed values

Winding: 36WGS840-R001			Type: 3636M		Enclosure: TEFC			
Nameplate Data			575 V, 60 Hz: Single Voltage Motor					
Rated Output (HP)		5	Full Load Torque		7.53 LB-FT			
Volts		575	Start Configuration		direct on line			
Full Load Amps		4.63	Breakdown Torque		55.2 LB-FT			
R.P.M.		3480	Pull-up Torque		30 LB-FT			
Hz	60	Phase	3	Locked-rotor Torque		42.1 LB-FT		
NEMA Design Code		A	KVA Code	N	Starting Current		61 A	
Service Factor (S.F.)		1.15	No-load Current		1.92 A			
NEMA Nom. Eff.		90.2	Power Factor		90	Line-line Res. @ 25°C		2.71 Ω
Rating - Duty		40C	AMB-CONT		Temp. Rise @ Rated Load		81°C	
S.F. Amps			Temp. Rise @ S.F. Load		97°C			
			Locked-rotor Power Factor		43.3			
			Rotor inertia		0.161 LB-FT2			

Load Characteristics 575 V, 60 Hz, 5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	50	74	85	90	92	93	91
Efficiency	82.7	88.5	90.4	90.5	90	88	90.2
Speed	3570	3545	3519	3492	3461	3430	3473
Line amperes	2.26	2.87	3.68	4.63	5.67	6.79	5.25


ABB Motors and Mechanical Inc.

WINDING # 36WGS840


Typical performance - not guaranteed values.

5 HP 3 PH 60 HZ 3480 RPM 575 V 3636M

TORQUES (LB-FT): PO=55.2 PU=30 LR=42.1 LRA=61

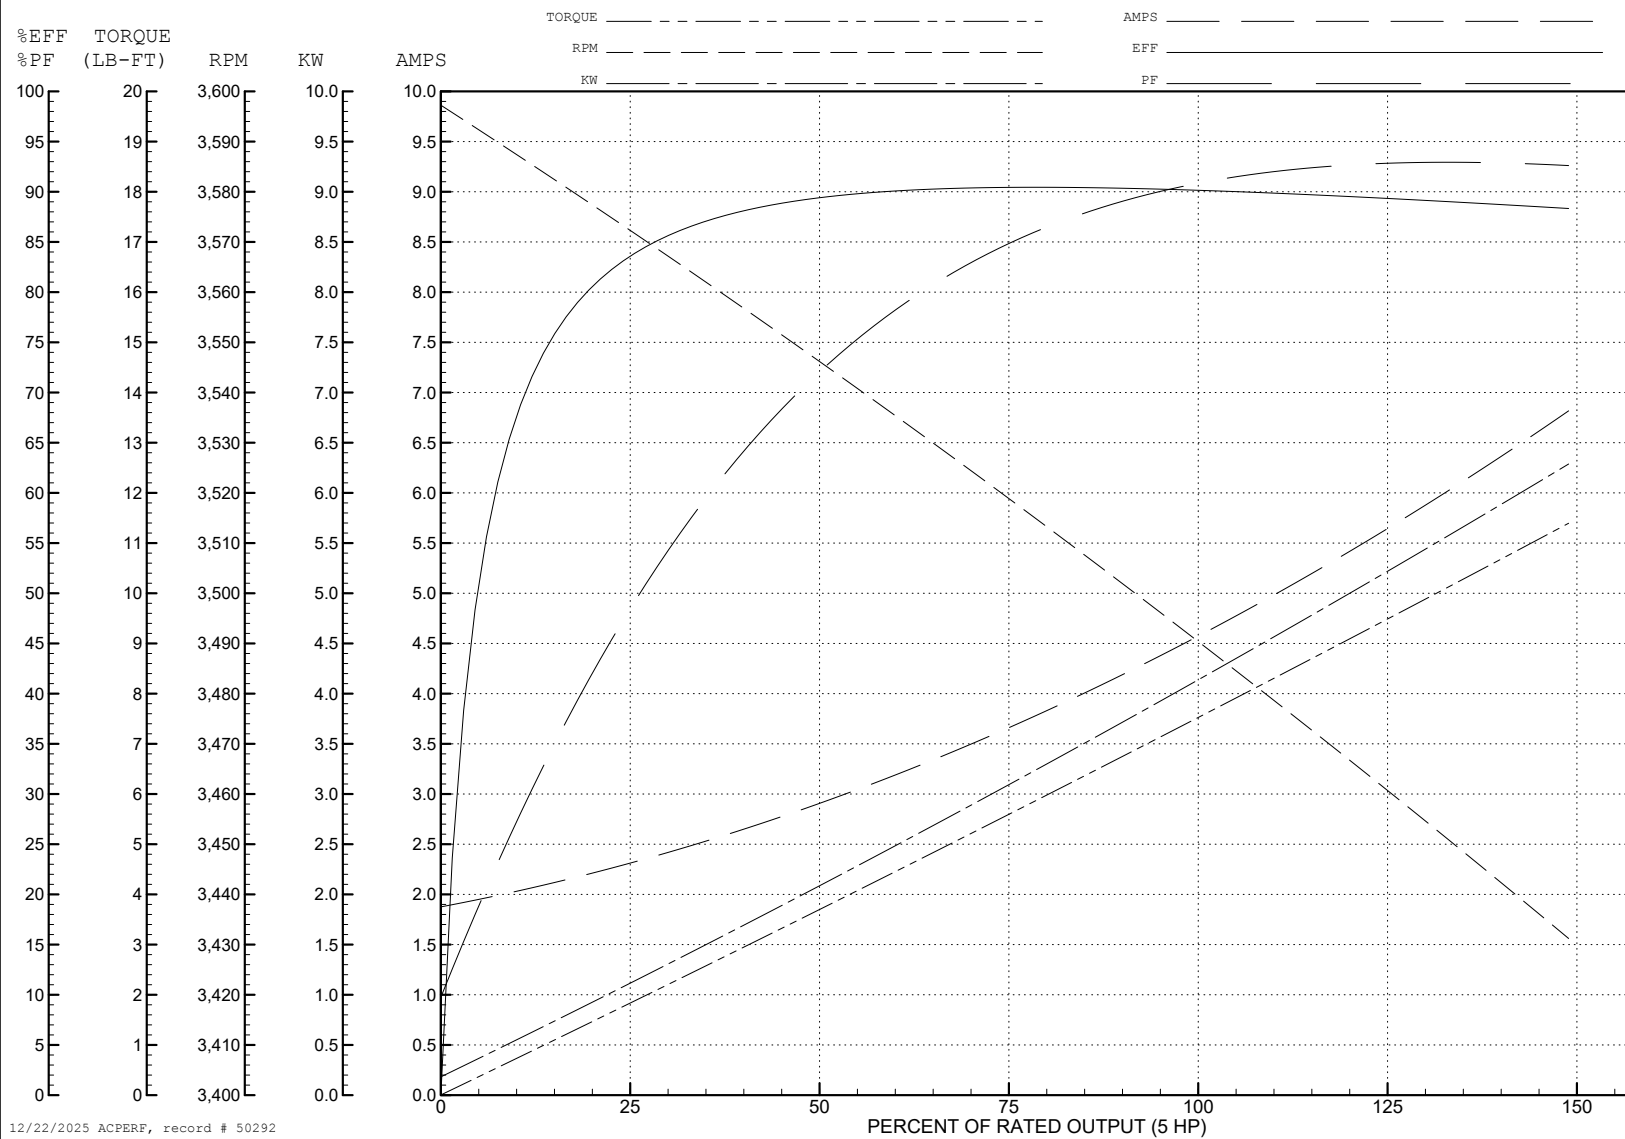

12/22/2025 ACPERF, record # 50292

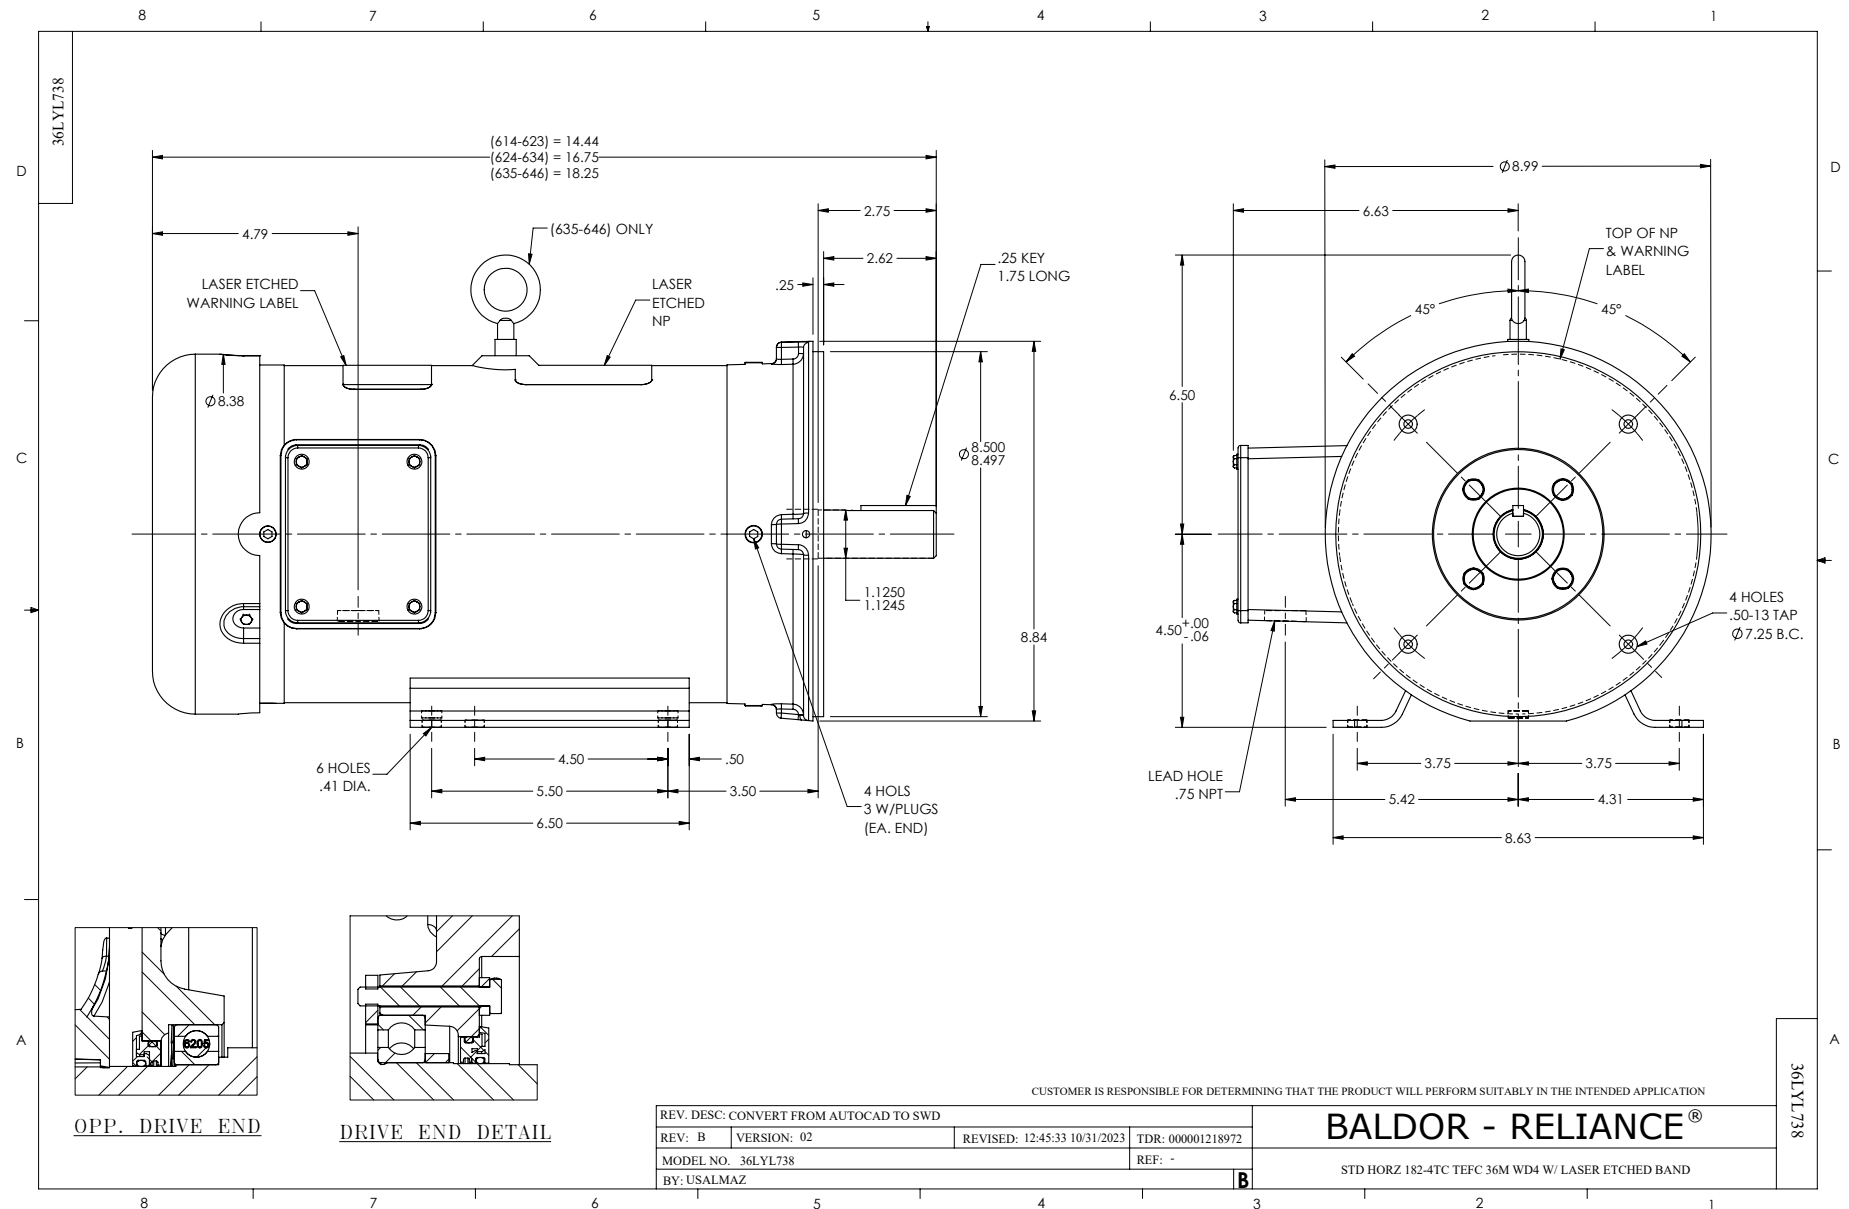

CD0006

TYPICAL WYE-CONNECTED MOTOR

1-BLU

J-BRN

OPTIONAL THERMOSTATS

J-BRN

3-ORG

2-WHT

TYPICAL DELTA-CONNECTED MOTOR

1-BLU

J-BRN

2-WHT

OPTIONAL THERMOSTATS

J-BRN

3-ORG

1

2

3

LINE

NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.

2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.

3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.

4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.

5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007			BALDOR - RELIANCE® 3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED SH 1 of 1
REV. LTR: E	VERSION: 01	TDR: 000001099922	
FILE: \AAA\00005\141	REVISED: 10: 24: 49 02/19/2019	BY: ENBRIRO	
MTL: —			

36WGT873: Electrical Design

Page 8 of 8