



Customer information packet

CESSWDNM3611T-5

3HP, 1750RPM, 3PH, 60HZ, 182TC, 3646M, TENV, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TENV
Frame	182TC
Frame Material	Stainless Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	3.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	575.0 V @ 60 HZ
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	3.200 A @ 575.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	89.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	No Endplate
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	3.2 a
Insulation Class	H
Inverter Code	Inverter Ready
KVA Code	K
Lifting Lugs	Standard Lifting Lugs

Part detail

Revision	F
Type	AC
Mech. spec.	36L196
Base	
Status	PRD/A
Elec. spec.	36WGN186
Layout	36LYL196
Eff. date	02-14-2024
CD Diagram	CD0006
Poles	04
Leads	3#16
Proprietary	False
Created date	12-13-2017

Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	3 @ 16 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3646M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	19.82 IN
Power Factor	79
Product Family	Wash Down Paint Free
Pulley End Bearing Type	Sealed Bearing
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.15
Shaft Diameter	1.125 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1750 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1669L									
CAT.NO.	CESSWDNM3611T-5								
SPEC.	36L196N186G1								
HP	3								
VOLTS	575								
AMP	3.2								
RPM	1750								
FRAME	182TC		HZ	60			PH	3	
SER.F.	1.15	CODE	K	DES	B	CLASS		H	
NEMA-NOM-EFF	89.5	PF	79						
RATING	40C AMB-CONT								
CC	010A								
DE	6206		ODE	6205					
ENCL	TENV	SN							
BLANK	2:1CT 20:1VT								

AC Induction Motor Performance Data

Record # 49994

Typical performance - not guaranteed values

Winding: 36WGN186-R001				Type: 3646M		Enclosure: TENV	
Nameplate Data				575 V, 60 Hz: High Voltage Connection			
Rated Output (HP)		3		Full Load Torque		9.03 LB-FT	
Volts		575		Start Configuration		direct on line	
Full Load Amps		3.2		Breakdown Torque		32.45 LB-FT	
R.P.M.		1750		Pull-up Torque		18.74 LB-FT	
Hz		60 Phase		Locked-rotor Torque		21.97 LB-FT	
NEMA Design Code		B KVA Code		Starting Current		24.24 A	
Service Factor (S.F.)		1.15		No-load Current		1.54 A	
NEMA Nom. Eff.		89.5 Power Factor		Line-line Res. @ 25°C		5.52 Ω	
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		101°C	
S.F. Amps				Temp. Rise @ S.F. Load		122°C	
				Locked-rotor Power Factor		38.8	
				Rotor inertia		0.428 LB-FT2	

Load Characteristics 575 V, 60 Hz, 3 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	40	61	73	79	82	84	81
Efficiency	85.4	89.7	90.2	89.5	88.1	87.1	88.7
Speed	1788	1778	1766	1753	1739	1723	1745
Line amperes	1.71	2.07	2.62	3.19	3.87	4.65	3.6


ABB Motors and Mechanical Inc.

WINDING # 36WGN186


Typical performance - not guaranteed values.

3 HP 3 PH 60 HZ 1750 RPM 575 V 3646M




TORQUES (LB-FT) : PO=32.45 PU=18.74 LR=21.97 LRA=24.24

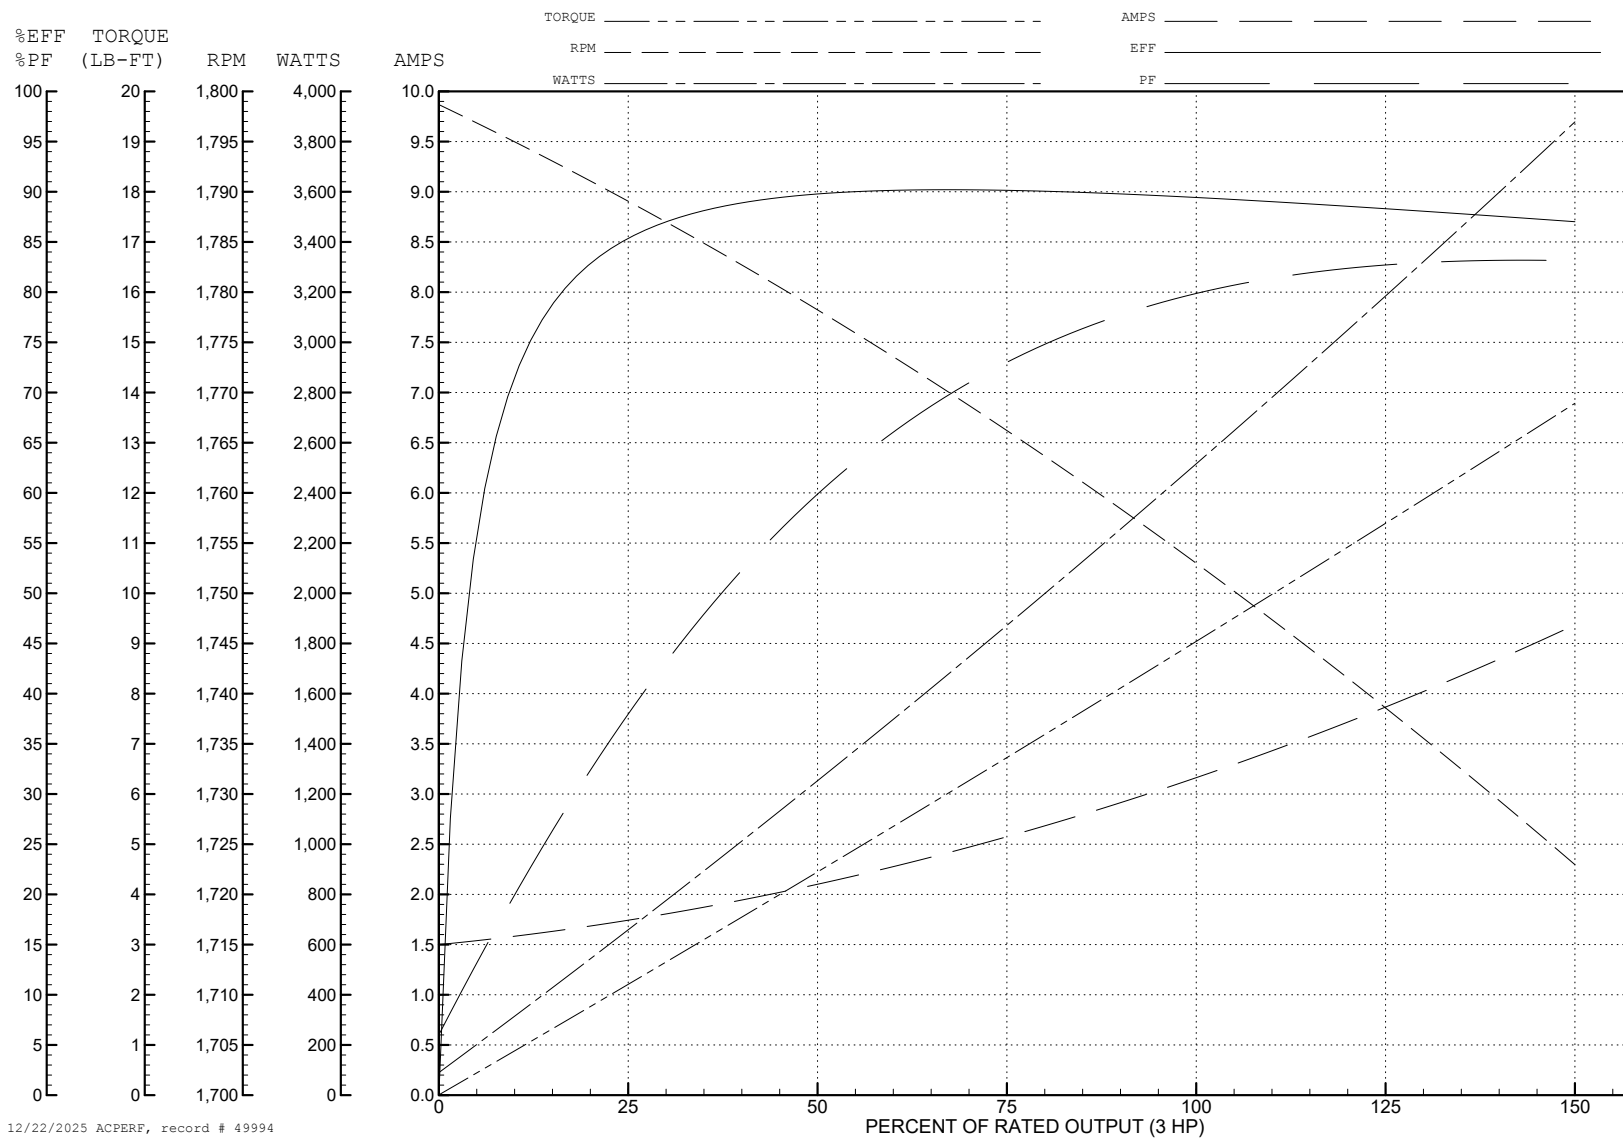

12/22/2025 ACPERF, record # 49994

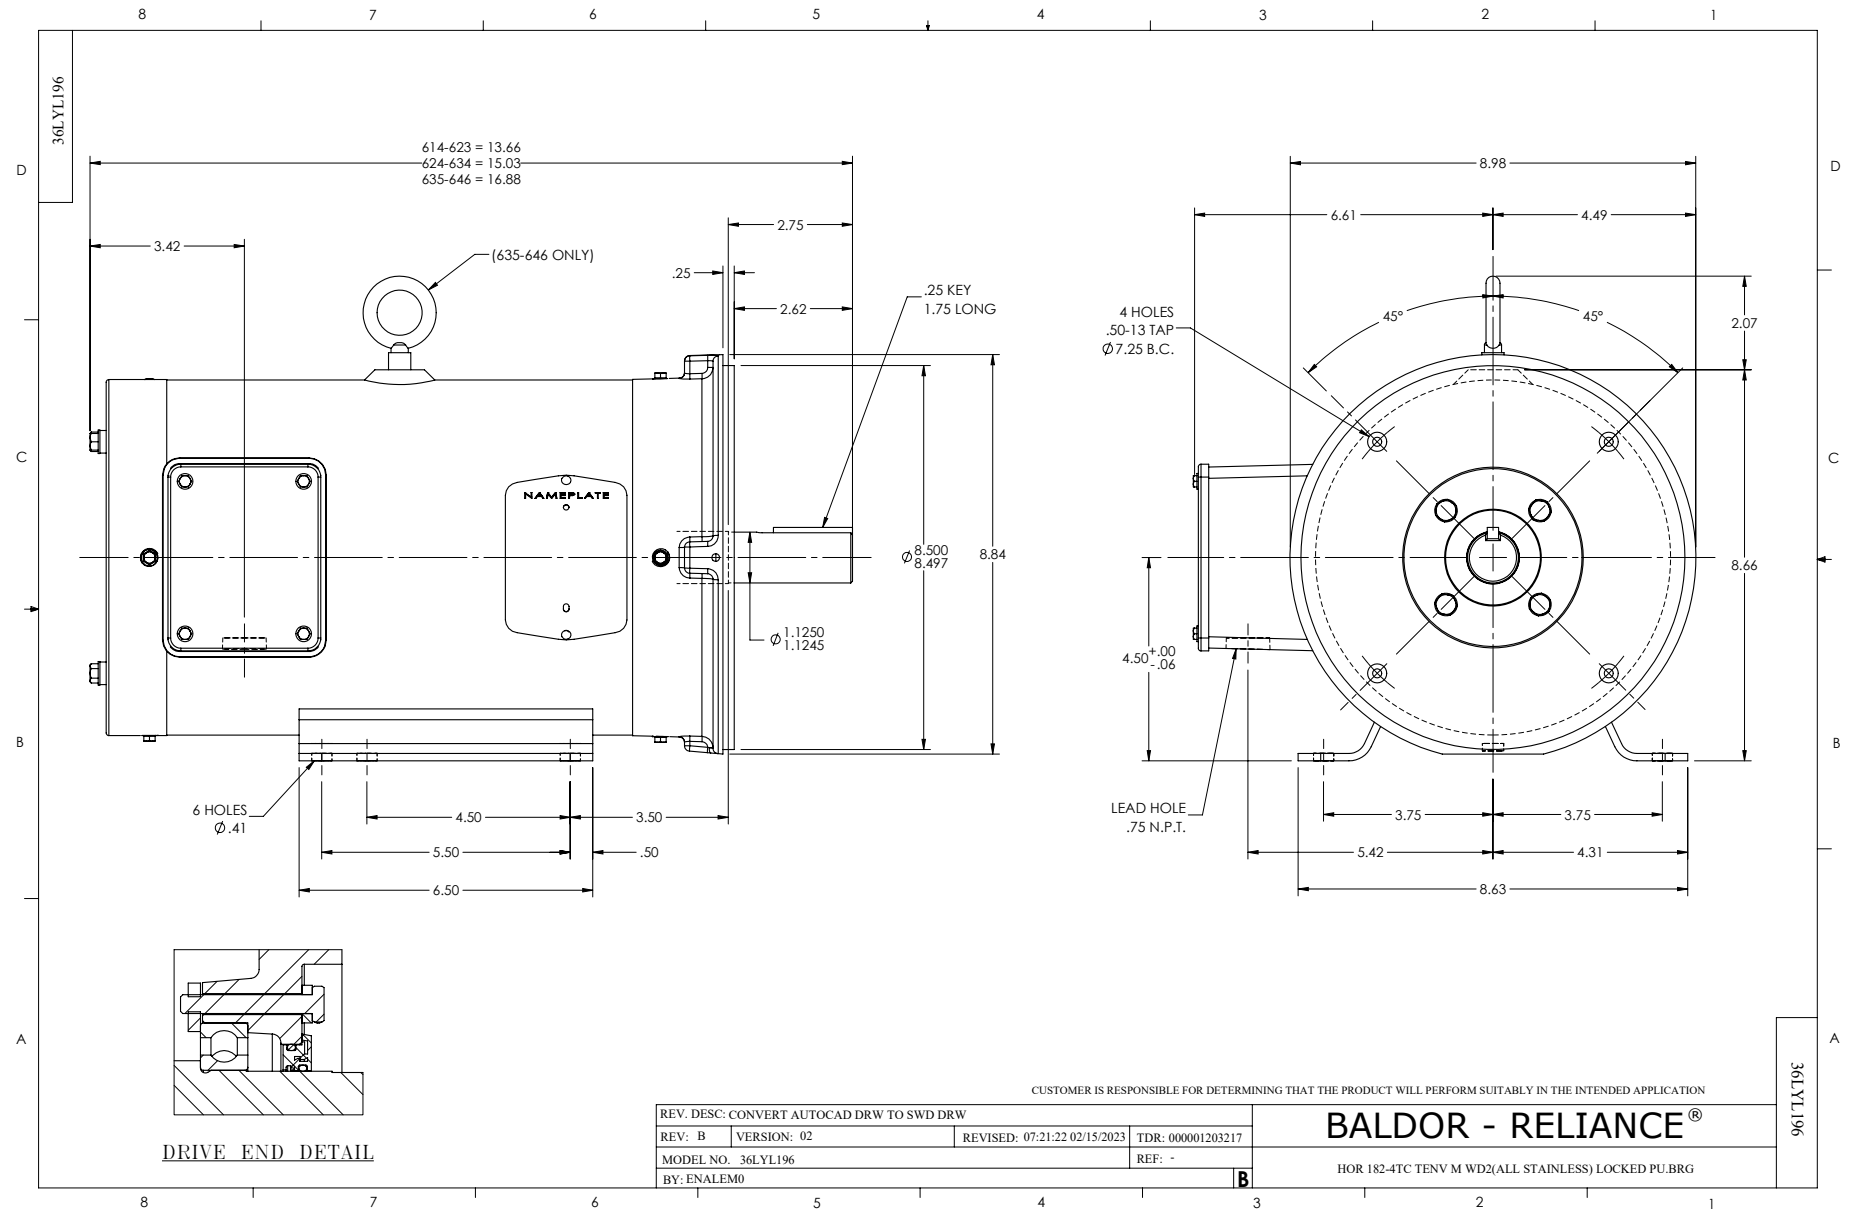

CD0006

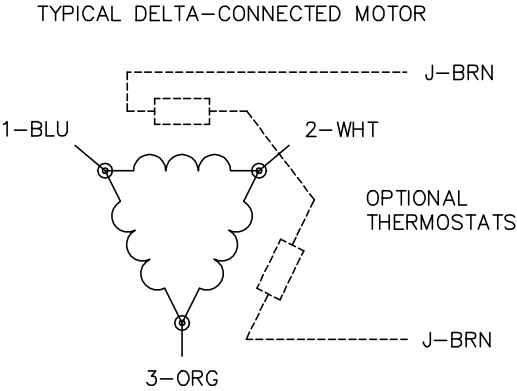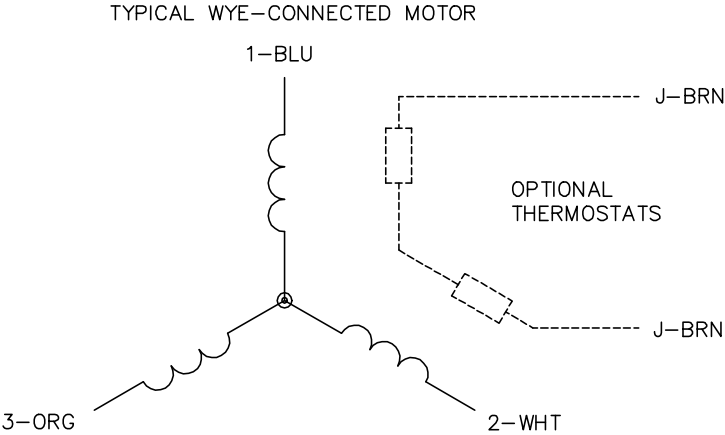

- NOTES:
- 1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
 - 2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
 - 3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
 - 4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
 - 5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007		
REV. LTR: E	VERSION: 01	TDR: 000001099922
FILE: \AAA\00005\141	REVISED: 10: 24: 49 02/19/2019	BY: ENBRIRO
MTL: —		

BALDOR - RELIANCE®

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1