



Customer information packet

CEWDM3702T

2HP, 865RPM, 3PH, 60HZ, 213TC, TEFC, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	213TC
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	2.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	900 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	CSA CSA EEV NEMA PREMIUM UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	3.500 A @ 460.0 V 7.000 A @ 230.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	85.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Heater Indicator	No Heater
High Voltage Full Load Amps	3.5 a

Part detail

Revision	B
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	37WGR734
Layout	37LYE599
Eff. date	02-14-2024
CD Diagram	CD0005
Poles	08
Leads	9#14
Proprietary	False
Created date	12-02-2019

Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	J
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3744M
Mounting Arrangement	F1
Number of Poles	8
Overall Length	19.78 IN
Power Factor	61
Product Family	Wash Down
Pulley Face Code	C-Face
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.375 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Speed	865 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1669L											
CAT.NO.	CEWDM3702T										
SPEC.	37-0000-0165										
HP	2										
VOLTS	230/460										
AMP	7/3.5										
RPM	865										
FRAME	213TC		HZ	60				PH	3		
SER.F.	1.15	CODE	J	DES	B	CLASS	F				
NEMA-NOM-EFF	85.5	PF	61								
RATING	40C AMB-CONT										
CC	010A										
DE	6307		ODE	6206							
ENCL	TEFC	SN									
BLANK	10:1 CT, 10:1 VT, 1.00SF										

AC Induction Motor Performance Data

Record # 57476

Typical performance - not guaranteed values

Winding: 37WGR734-R003			Type: 3744M		Enclosure: TEFC			
Nameplate Data			460 V, 60 Hz: High Voltage Connection					
Rated Output (HP)		2	Full Load Torque		12.2 LB-FT			
Volts		230/460	Start Configuration		direct on line			
Full Load Amps		7/3.5	Breakdown Torque		36.2 LB-FT			
R.P.M.		865	Pull-up Torque		20.1 LB-FT			
Hz	60	Phase	3	Locked-rotor Torque		22.2 LB-FT		
NEMA Design Code		B	KVA Code	J	Starting Current		18.7 A	
Service Factor (S.F.)		1.15		No-load Current		2.25 A		
NEMA Nom. Eff.		85.5	Power Factor		61	Line-line Res. @ 25°C		4.59 Ω
Rating - Duty		40C		AMB-CONT		Temp. Rise @ Rated Load		22°C
S.F. Amps						Temp. Rise @ S.F. Load		26°C
						Locked-rotor Power Factor		32.5
						Rotor inertia		1.09 LB-FT2

Load Characteristics 460 V, 60 Hz, 2 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	26	42	53	61	65	69	63
Efficiency	77.6	84.9	86.8	87.3	85.9	83.9	86.5
Speed	892	885	877	868	857	846	861
Line amperes	2.37	2.65	3.06	3.57	4.16	4.86	3.92

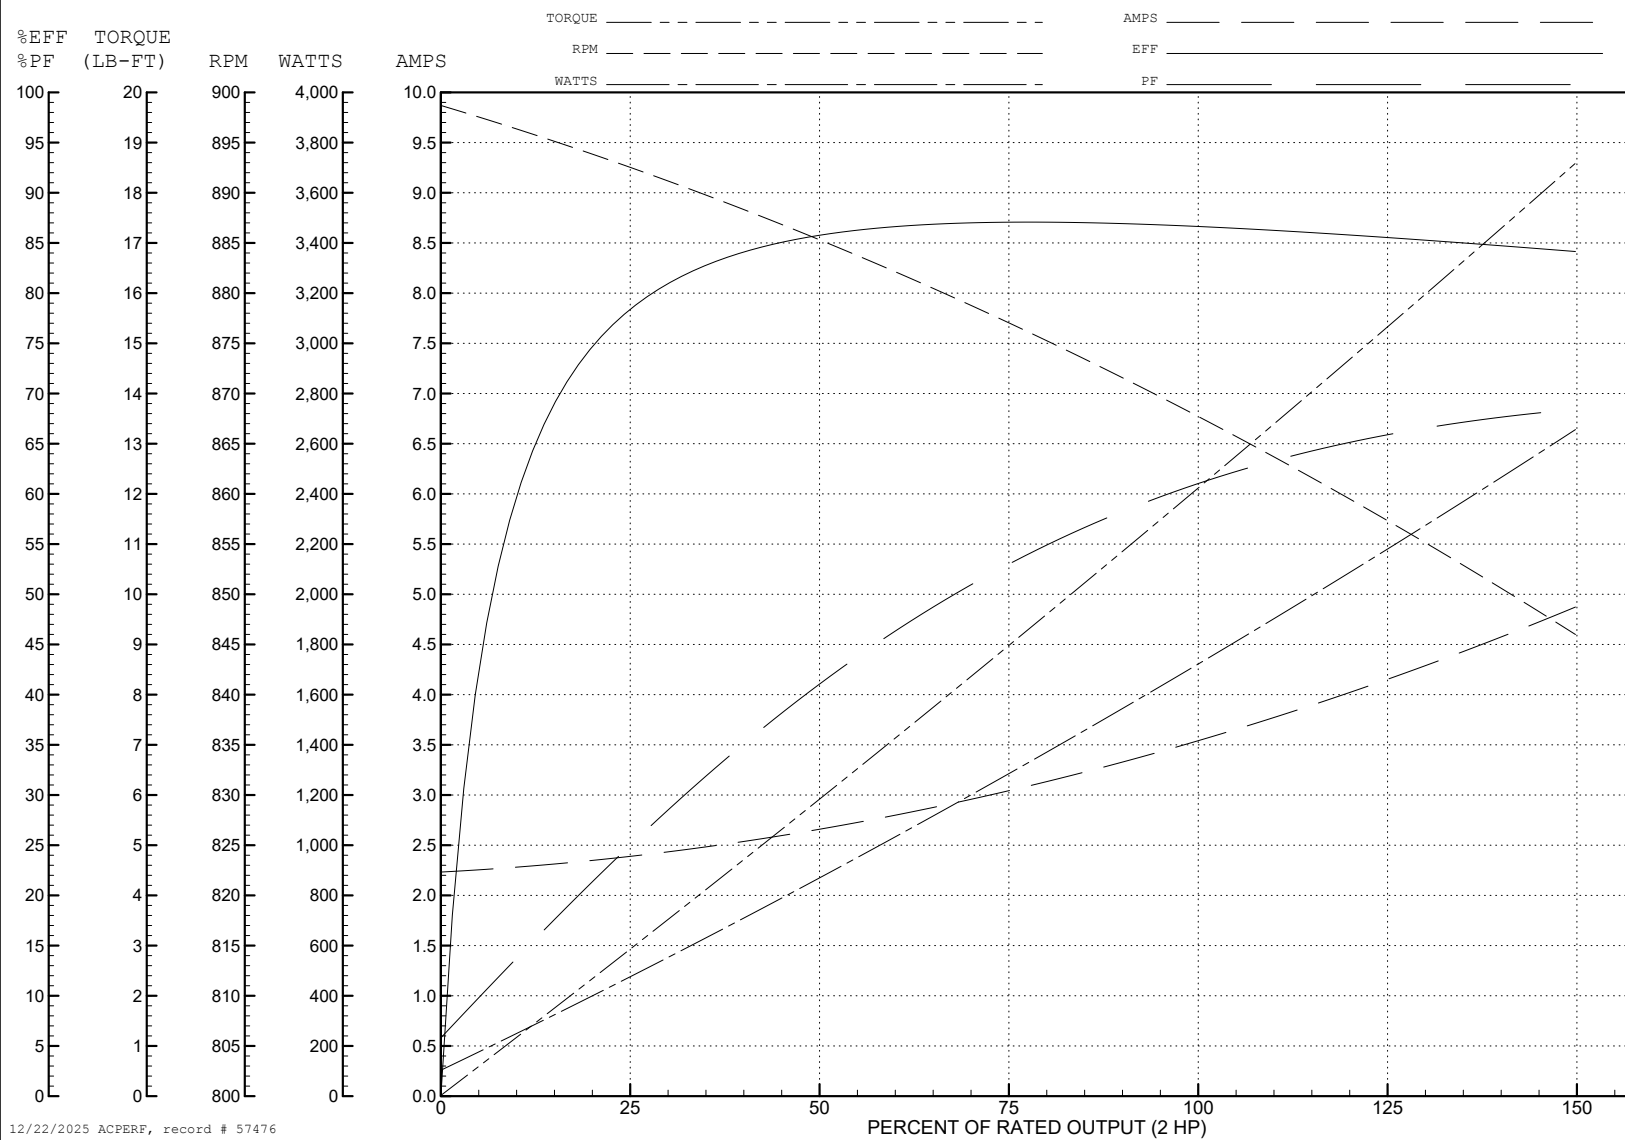
ABB Motors and Mechanical Inc.

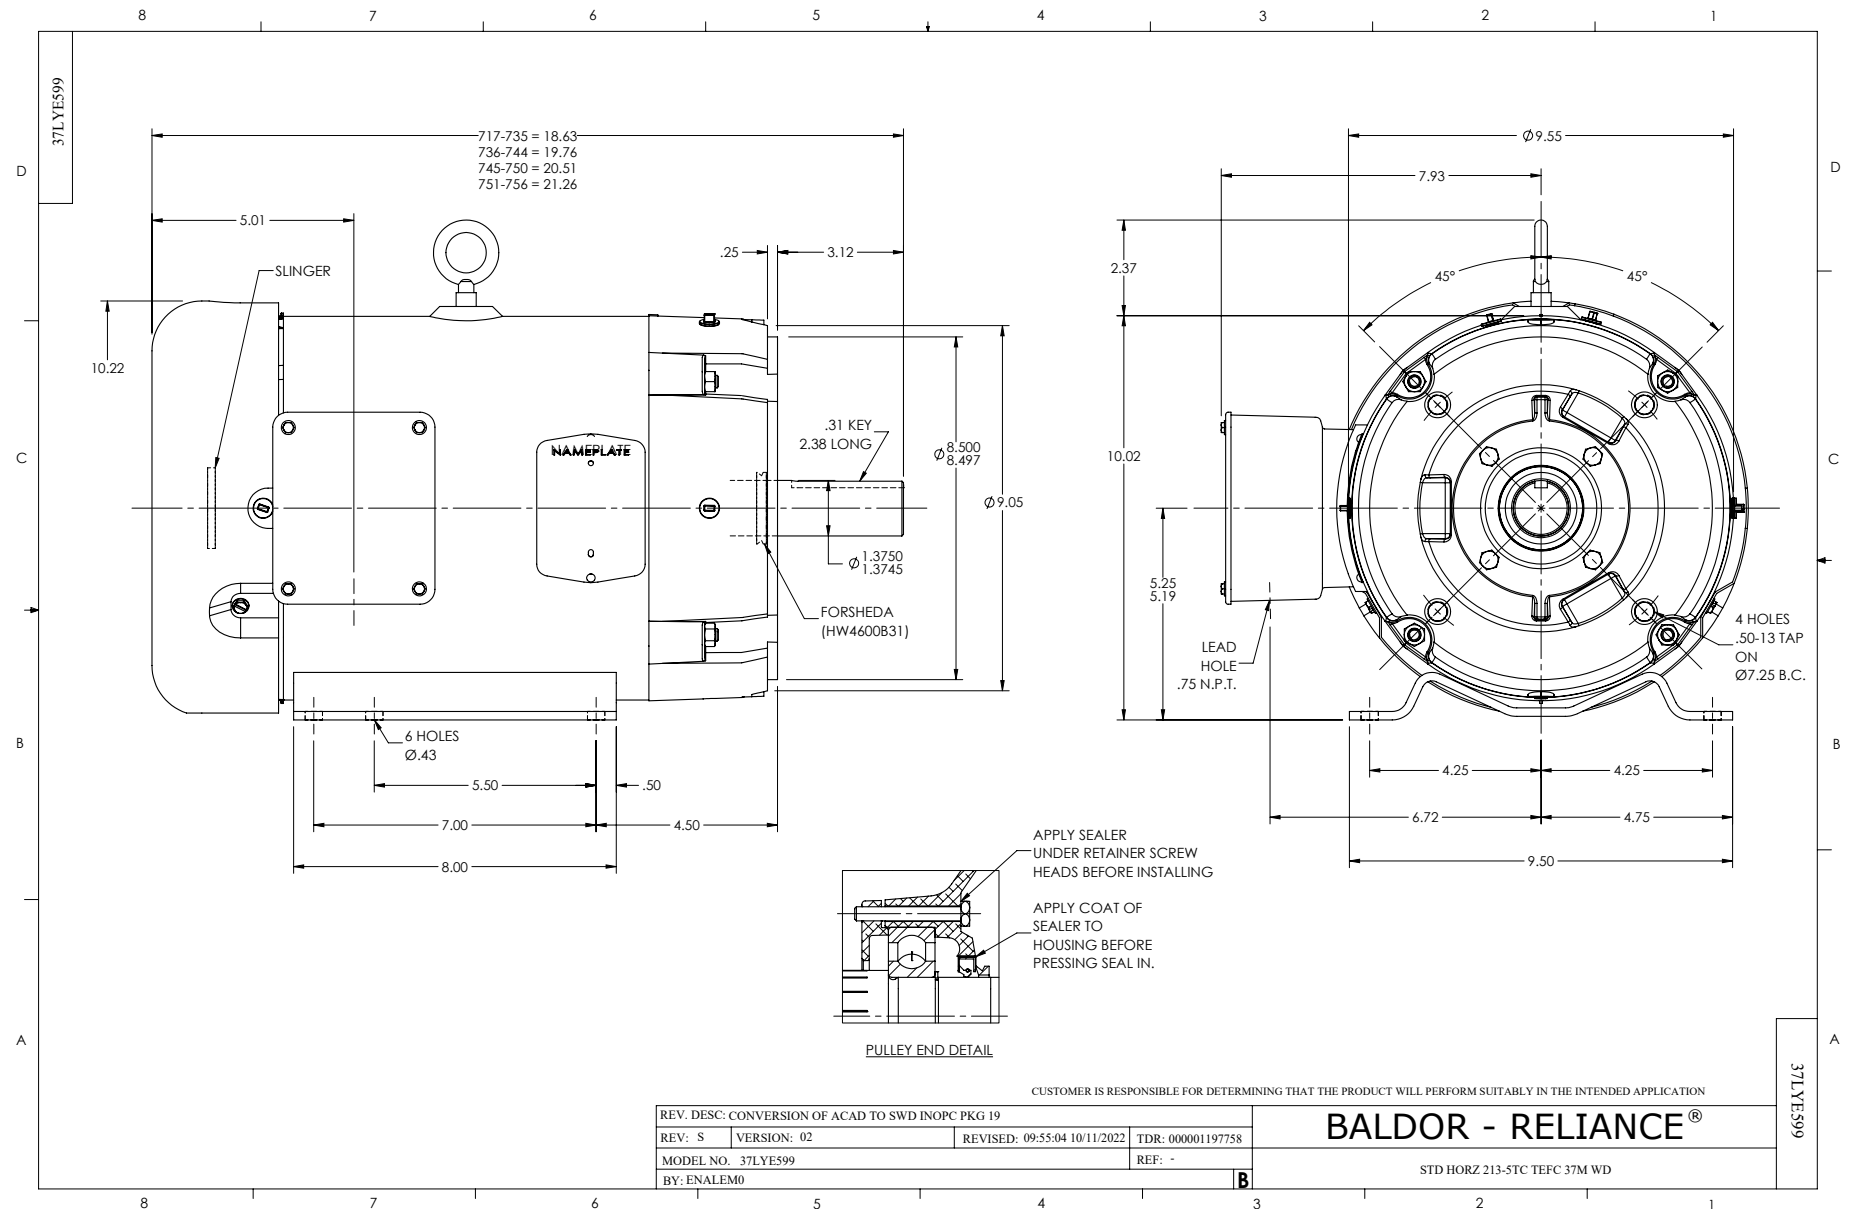
WINDING # 37WGR734

Typical performance - not guaranteed values.

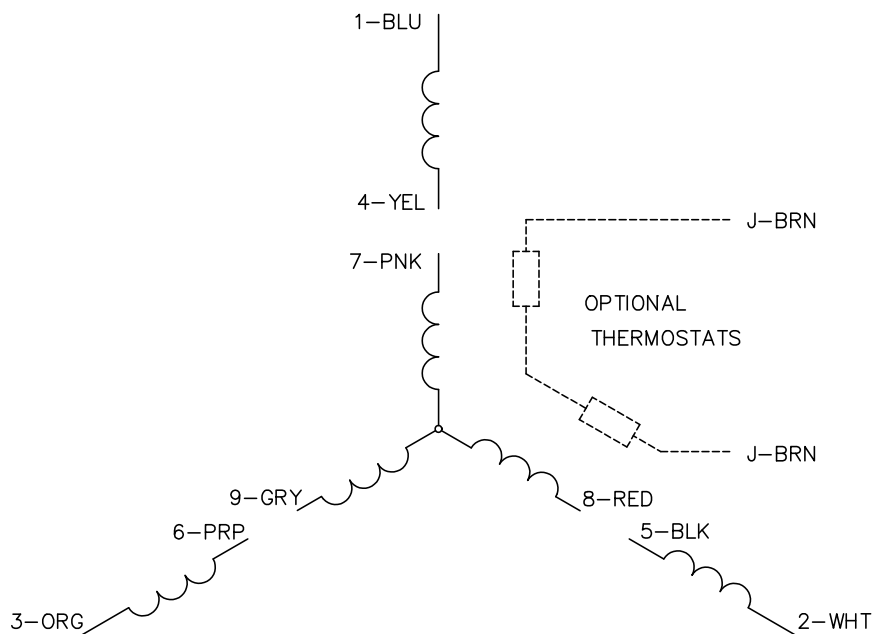

2 HP 3 PH 60 HZ 865 RPM 460 V 3744M

TORQUES (LB-FT): PO=36.2 PU=20.1 LR=22.2 LRA=18.7






CD0005

LOW VOLTAGE
(2Y)

LINE

HIGH VOLTAGE
(1Y)

LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS

REV. LTR: E

BY: JLP

REVISED: 01/19/99 10:15

TDR: 0171435

S00000

FILE: AAA00005140

MDL: -

MTL: -

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS

CD0005