



Customer information packet

CJL1306A

.75HP, 3450RPM, 1PH, 60HZ, 56J, 3424L, OPEN, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	OPEN
Frame	56J
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Cap Start, Induction Run
Output @ Frequency	.750 HP @ 60 HZ
Phase	1
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 115.0 V @ 60 HZ
Agency Approvals	CSA UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	5.500 A @ 230.0 V 11.000 A @ 115.0 V
Design Code	N
Drip Cover	Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	69.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Drip Cover Mounting
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	5.5 a

Part detail

Revision	AE
Type	AC
Mech. spec.	34F492
Base	
Status	PRD/A
Elec. spec.	34WG2414
Layout	34LYF492
Eff. date	10-25-2024
CD Diagram	CD0307
Poles	02
Leads	5#18,1#14 #1TH
Proprietary	False
Created date	01-01-0001

Insulation Class	B
Inverter Code	Not Inverter
KVA Code	J
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Terminal Panel Or Lead Hole
Motor Lead Quantity/Wire Size	5 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3424L
Mounting Arrangement	F1
Number of Poles	2
Overall Length	13.39 IN
Power Factor	68
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Ext Thread
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.50
Shaft Diameter	0.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Fixed Opposite Standard
Shaft Slinger Indicator	No Slinger
Speed	3450 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	Automatic Thermal Overload
Winding Thermal 1 Location	ES

Winding Thermal 2

None

Nameplate

NP1257L											
CAT.NO.	CJL1306A										
SPEC.	34F492-2414G1										
HP	.75										
VOLTS	115/230										
AMP	11/5.5										
RPM	3450										
FRAME	56J				HZ		60		PH		1
SER.F.	1.50	CODE		J	DES		N	CL		B	
NEMA-NOM-EFF	69	PF		68							
RATING	40C AMB-CONT										
CC											
DE	6203		ODE		6203						
ENCL	OPEN	SN									
	SFA 13/6.5										

AC Induction Motor Performance Data

Record # 6649

Typical performance - not guaranteed values

Winding: 34WG2414-R001			Type: 3424L		Enclosure: OPEN		
Nameplate Data			230 V, 60 Hz: High Voltage Connection				
Rated Output (HP)		.75	Full Load Torque		1.15 LB-FT		
Volts		115/230	Start Configuration		direct on line		
Full Load Amps		11/5.5	Breakdown Torque		3.98 LB-FT		
R.P.M.		3450	Pull-up Torque		1.63 LB-FT		
Hz	60	Phase	1	Locked-rotor Torque		2.45 LB-FT	
NEMA Design Code		N	KVA Code	J	Starting Current		31.2 A
Service Factor (S.F.)		1.5		No-load Current		3.7 A	
NEMA Nom. Eff.		69	Power Factor	68	Line-line Res. @ 25°C		2.33 Ω A Ph 1.65 Ω B Ph
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		75°C	
S.F. Amps		13/6.5		Temp. Rise @ S.F. Load		108°C	

Load Characteristics 230 V, 60 Hz, 0.75 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	39	52	64	73	79	83	85
Efficiency	41.7	57.6	65.5	69.2	69.8	69.3	70.4
Speed	3558	3536	3508	3479	3447	3410	3415
Line amperes	3.78	4	4.4	4.91	5.61	6.37	6.31


ABB Motors and Mechanical Inc.


WINDING # 34WG2414

Typical performance - not guaranteed values.


0.75 HP 1 PH 60 HZ 3450 RPM 230 V 3424L

TORQUES (LB-FT): PO=3.98 PU=1.63 LR=2.45 LRA=31.2

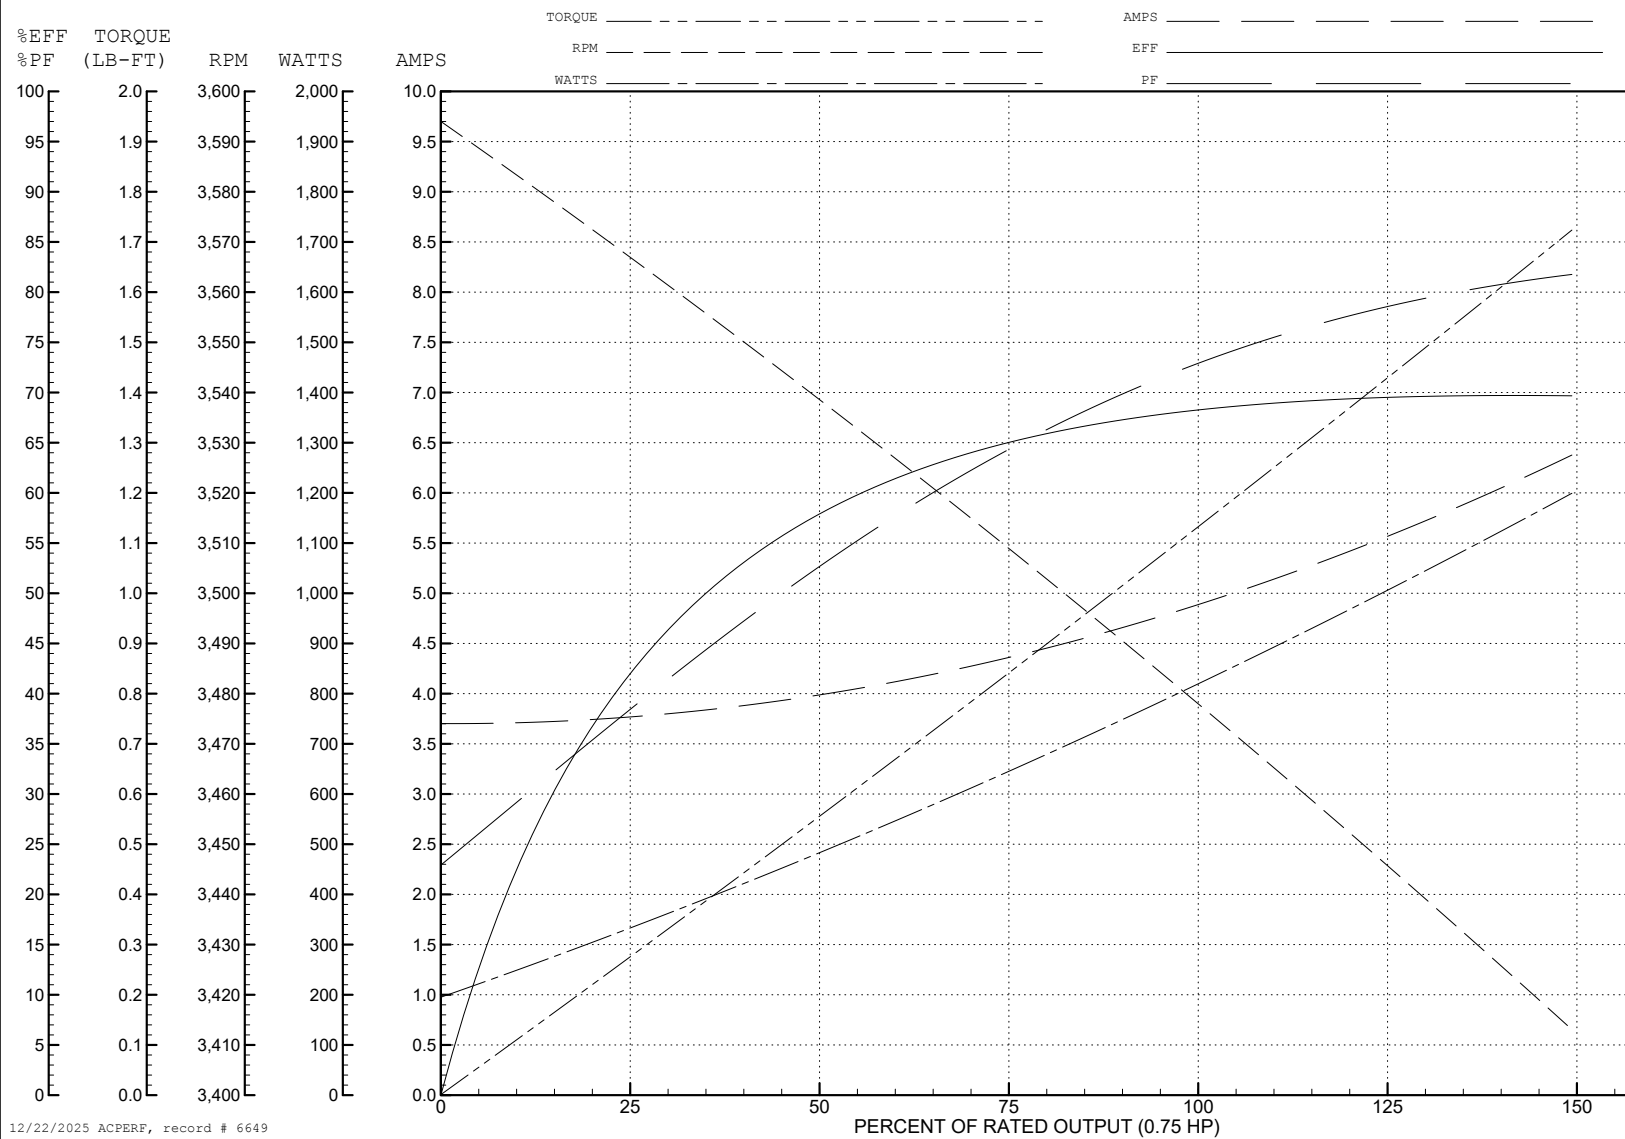

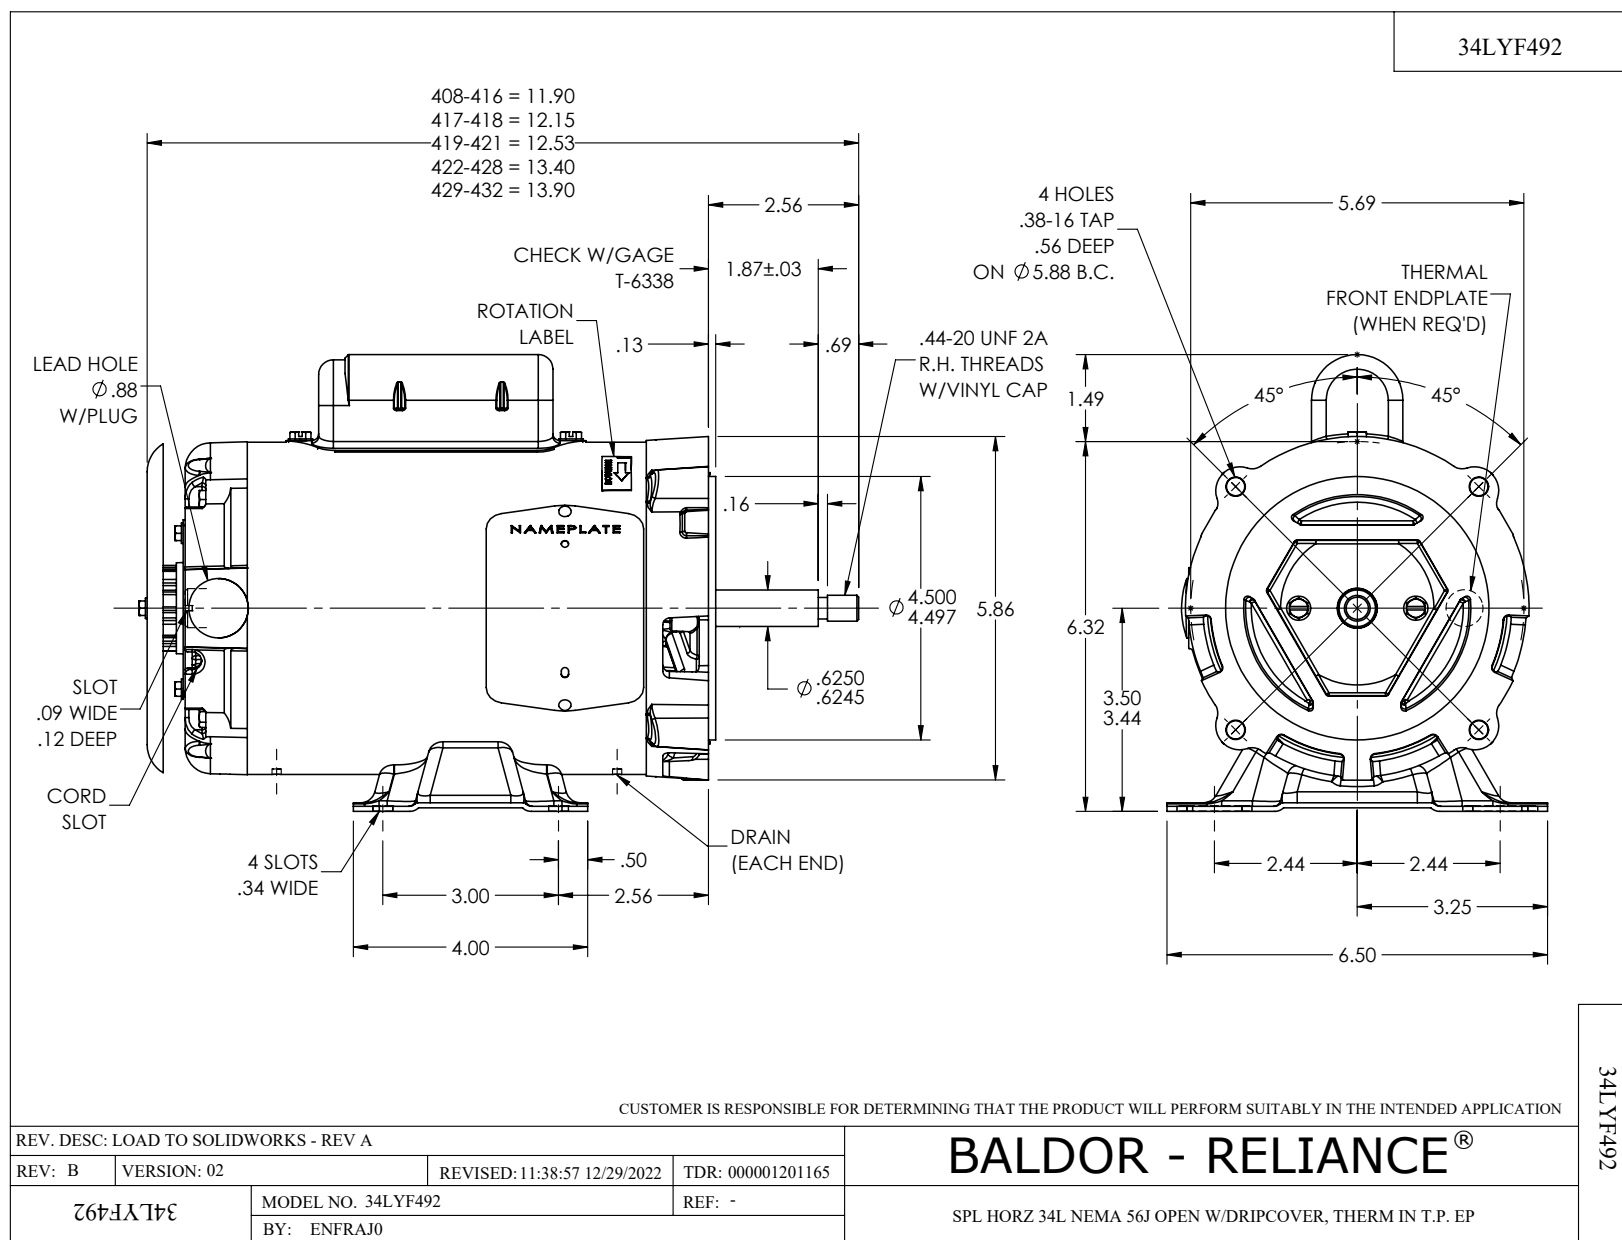

CD0307

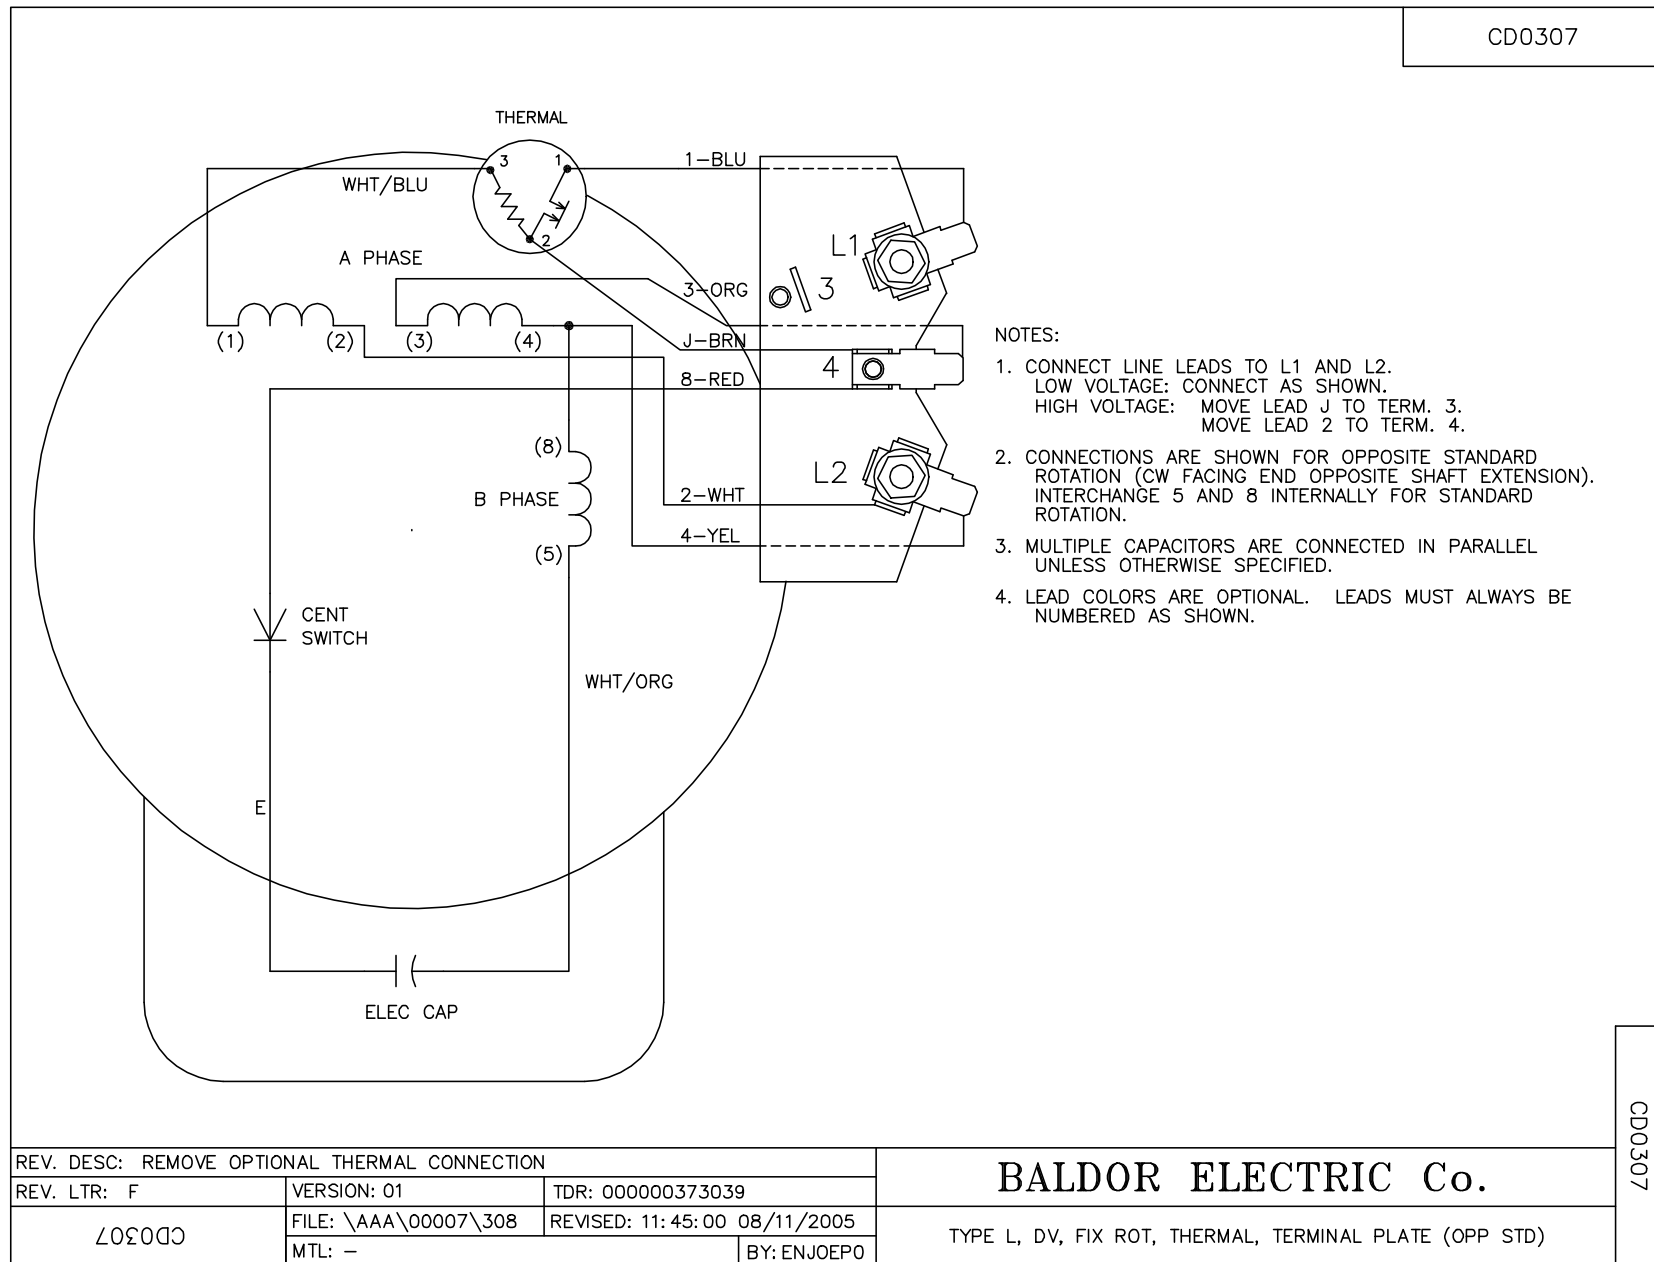

REV. DESC: REMOVE OPTIONAL THERMAL CONNECTION

REV. LTR: F

VERSION: 01

TDR: 000000373039

CD0307

FILE: \AAA\00007\308

REVISED: 11:45:00 08/11/2005

MTL: -

BY: ENJOEP0

BALDOR ELECTRIC Co.

TYPE L, DV, FIX ROT, THERMAL, TERMINAL PLATE (OPP STD)

CD0307