



Customer information packet

CJL1313A

1.5HP, 3450RPM, 1PH, 60HZ, 56J, 3432LC, OPEN

Class - None

Division - Not Applicable

Specifications

Enclosure	OPEN
Frame	56J
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Cap Start, Cap Run
Output @ Frequency	1.500 HP @ 60 HZ
Phase	1
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	115.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	CSA UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	13.000 A @ 115.0 V 6.500 A @ 230.0 V
Drip Cover	Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	78.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Drip Cover Mounting
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	6.5 a
Insulation Class	B

Part detail

Revision	X
Type	AC
Mech. spec.	34F532
Base	
Status	PRD/A
Elec. spec.	34WGX598
Layout	34LYF532
Eff. date	10-25-2024
CD Diagram	CD0769
Poles	02
Leads	4#16 A&J,1#18 B PH,1#14 #1TH
Proprietary	False
Created date	01-01-0001

Inverter Code	Not Inverter
KVA Code	H
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Terminal Panel Or Lead Hole
Motor Lead Quantity/Wire Size	4 @ 16 AWG, A&J
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3432LC
Mounting Arrangement	F1
Number of Poles	2
Overall Length	13.89 IN
Power Factor	95
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Ext Thread
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.30
Shaft Diameter	0.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Fixed Opposite Standard
Shaft Slinger Indicator	No Slinger
Speed	3450 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	Automatic Thermal Overload
Winding Thermal 1 Location	SB

Nameplate

NP1257L									
CAT.NO.	CJL1313A								
SPEC.	34F532X598								
HP	1.5								
VOLTS	115/230								
AMP	13/6.5								
RPM	3450								
FRAME	56J			HZ	60		PH	1	
SER.F.	130	CODE	H	DES	-	CL	B		
NEMA-NOM-EFF	78.5	PF	95						
RATING	40C AMB-CONT								
CC									
DE	6203	ODE	6203						
ENCL	OPEN	SN							
	SFA 17/8.5								

AC Induction Motor Performance Data

Record # 7475

Typical performance - not guaranteed values

Winding: 34WGX598-R001			Type: 3432LC		Enclosure: OPEN			
Nameplate Data			230 V, 60 Hz: High Voltage Connection					
Rated Output (HP)		1.5	Full Load Torque		2.3 LB-FT			
Volts		115/230	Start Configuration		direct on line			
Full Load Amps		13/6.5	Breakdown Torque		6.2 LB-FT			
R.P.M.		3450	Pull-up Torque		5 LB-FT			
Hz	60	Phase	1	Locked-rotor Torque		6.7 LB-FT		
NEMA Design Code		-	KVA Code	H	Starting Current		43.5 A	
Service Factor (S.F.)		1.3		No-load Current		1.65 A		
NEMA Nom. Eff.		78.5	Power Factor		95	Line-line Res. @ 25°C		1.58 Ω A Ph 1.44 Ω B Ph
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		38°C		
S.F. Amps		17/8.5		Temp. Rise @ S.F. Load		53°C		

Load Characteristics 230 V, 60 Hz, 1.5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	81	90	93	95	95	95	95
Efficiency	60.5	76.2	77.7	78.5	77.2	75.3	76.8
Speed	3566	3534	3498	3455	3403	3343	3391
Line amperes	2.45	3.65	5	6.5	8.25	10.25	8.65


ABB Motors and Mechanical Inc.


WINDING # 34WGX598

Typical performance - not guaranteed values.


1.5 HP 1 PH 60 HZ 3450 RPM 230 V 3432LC

TORQUES (LB-FT): PO=6.2 PU=5 LR=6.7 LRA=43.5

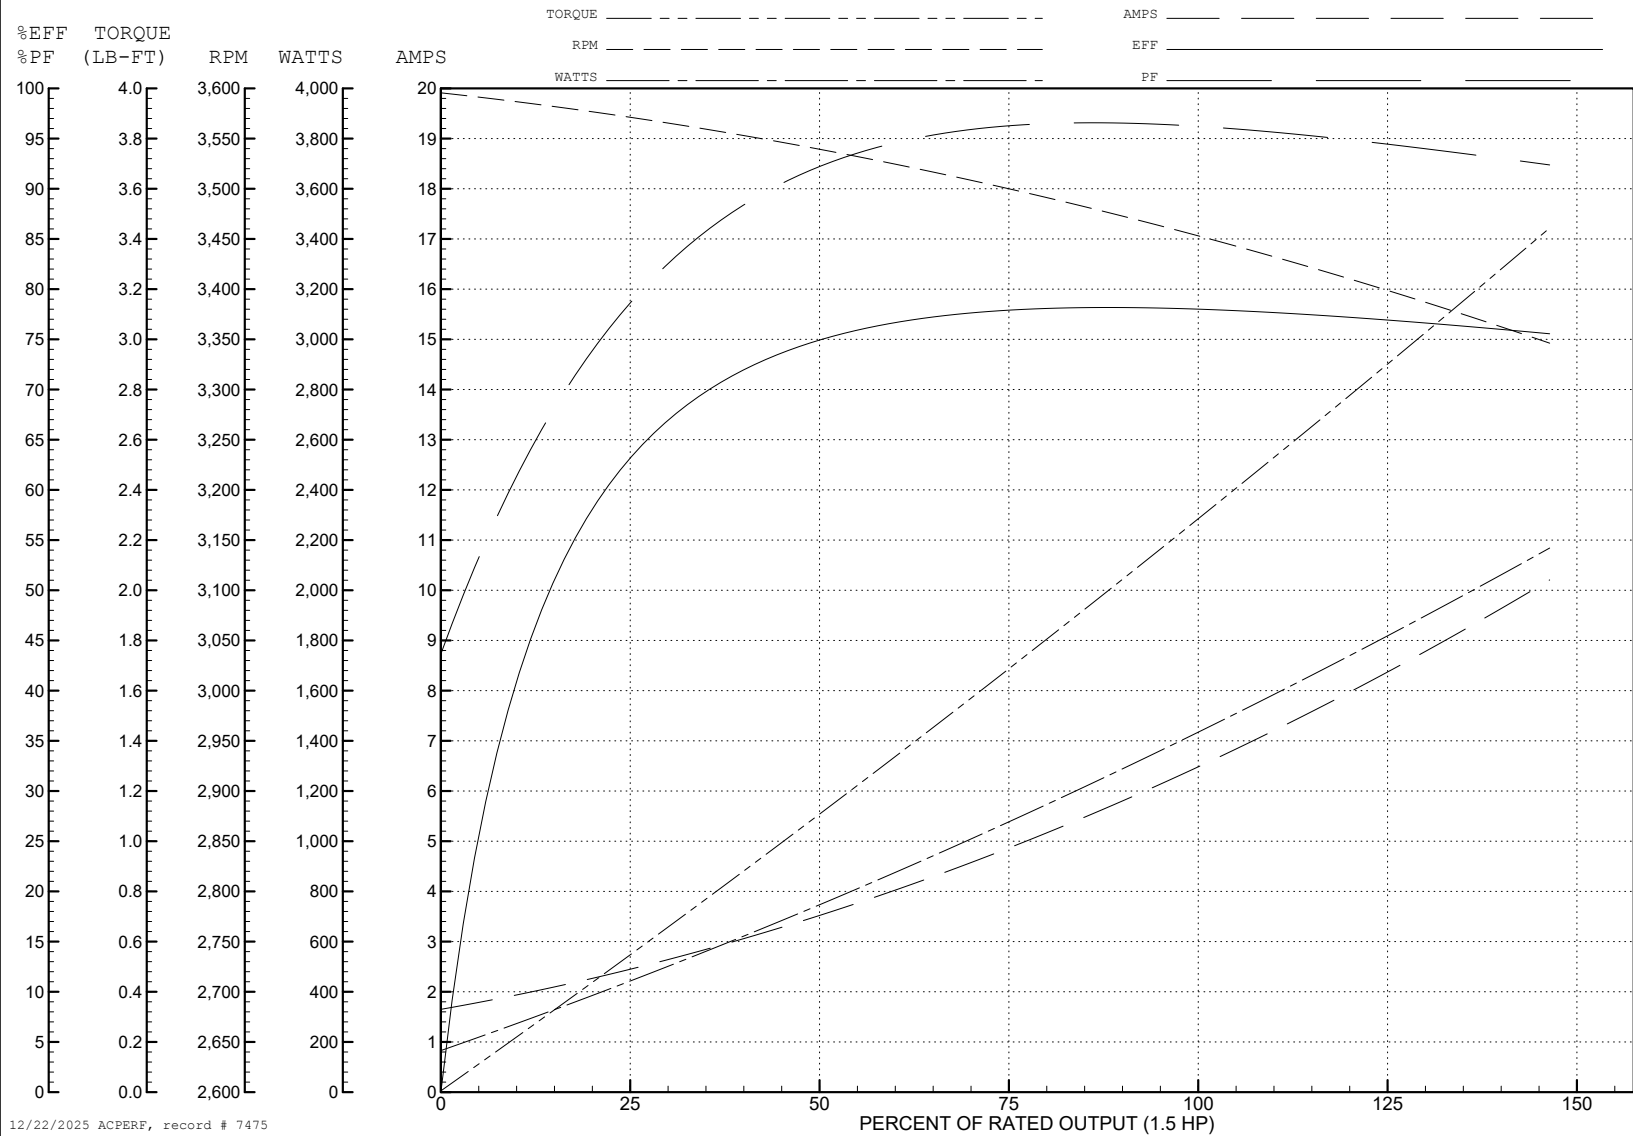

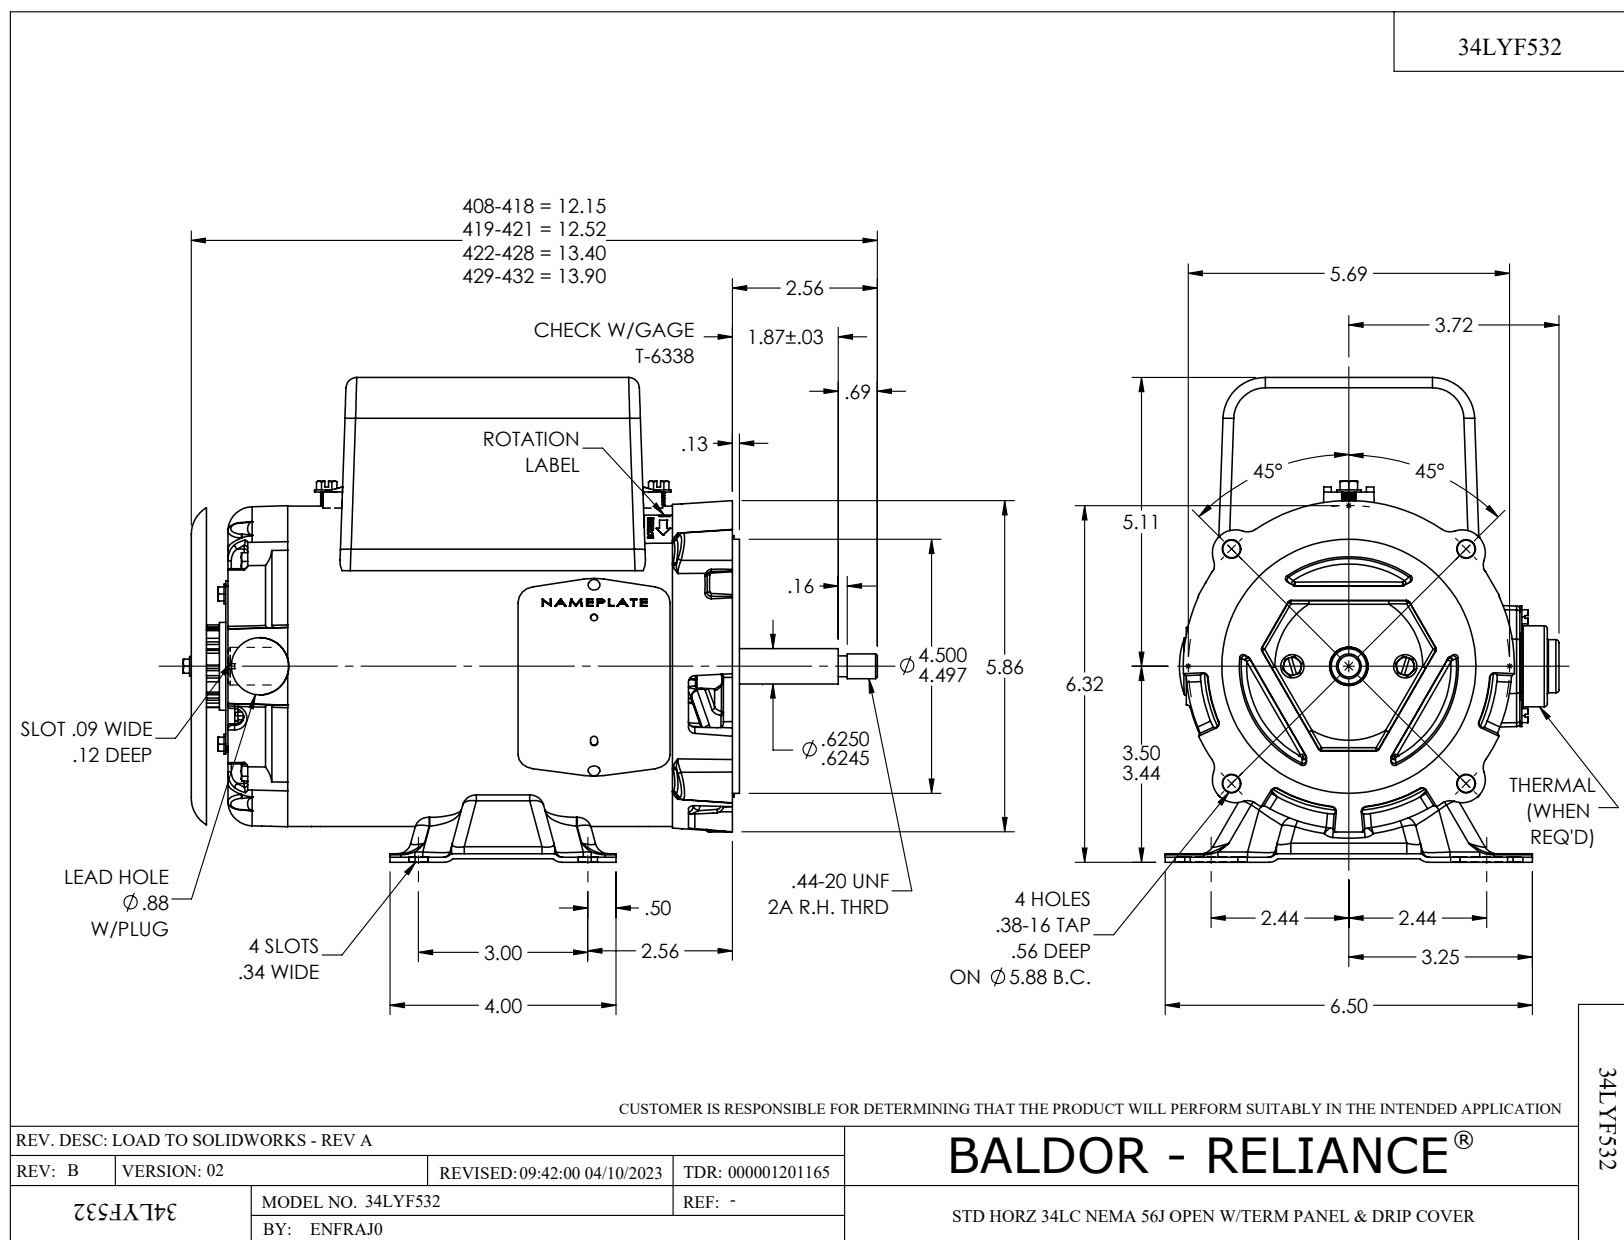

CD0769

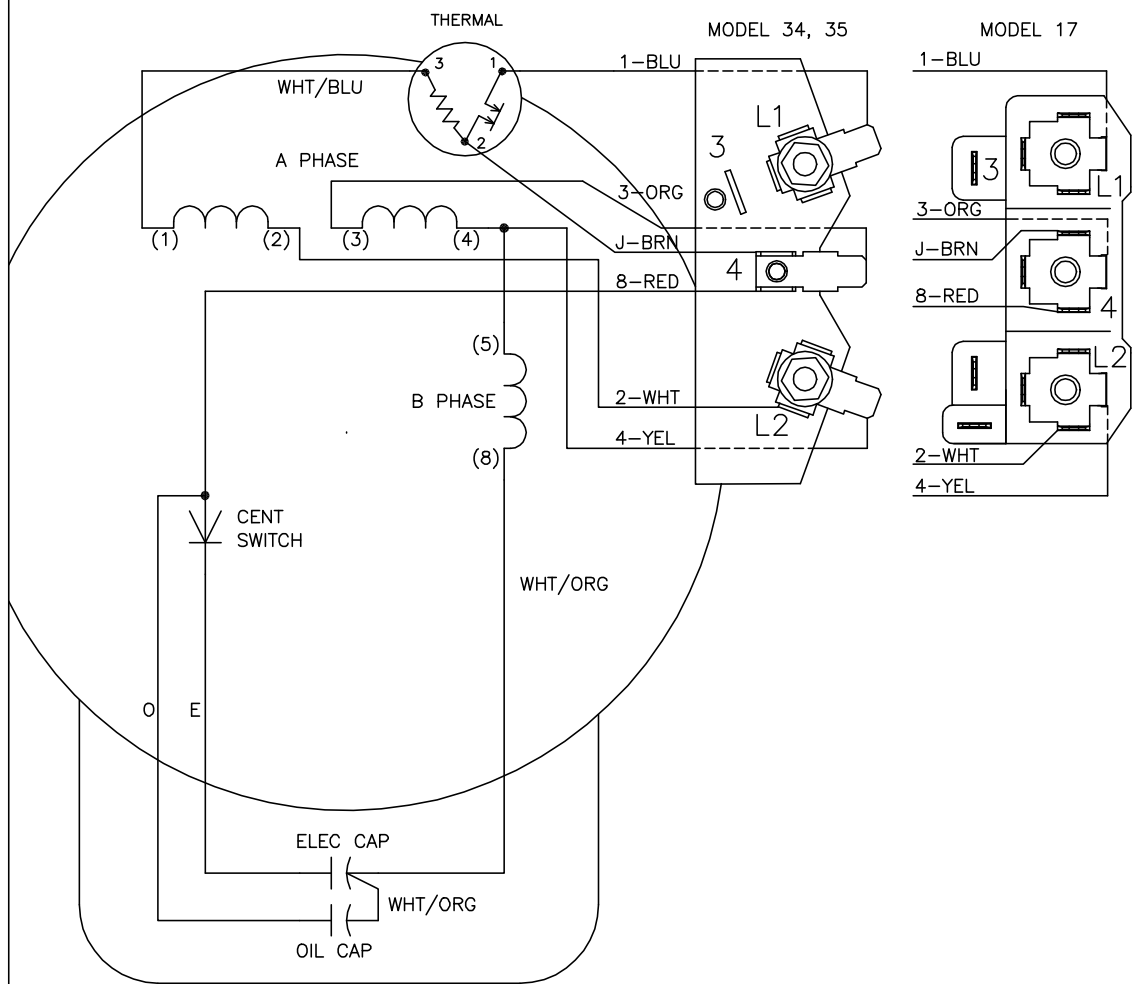

NOTES:

1. CONNECT LINE LEADS TO L1 AND L2.
LOW VOLTAGE: CONNECT AS SHOWN.
HIGH VOLTAGE: MOVE LEAD J TO TERM. 3.
MOVE LEAD 2 TO TERM. 4.
2. CONNECTIONS ARE SHOWN FOR STANDARD
ROTATION (CCW FACING END OPPOSITE
SHAFT EXTENSION). INTERCHANGE
5 AND 8 INTERNALLY FOR OPPOSITE
STANDARD ROTATION.
3. MULTIPLE CAPACITORS ARE CONNECTED IN
PARALLEL UNLESS OTHERWISE SPECIFIED.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST
ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REMOVE OPTIONAL THERMAL CONNECTION			
REV. LTR: E	VERSION: 01	TDR: 000000373051	
69L0D0	FILE: \AAA\00007\260	REVISED: 15:13:50 09/08/2005	
	MTL: -		BY: ENJOEPO

BALDOR ELECTRIC Co.

TYPE LC, DV, FIX, THERMAL, B PH AMPS THRU HTR-HVC,TERM PLATE

CD0769