



Customer information packet

CJL1317A

2HP, 3450RPM, 1PH, 60HZ, 56J, 3528L, OPEN, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	OPEN
Frame	56J
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Cap Start, Induction Run
Output @ Frequency	2.000 HP @ 60 HZ
Phase	1
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 115.0 V @ 60 HZ
Agency Approvals	CSA UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	26.000 A @ 115.0 V 13.000 A @ 230.0 V
Design Code	L
Drip Cover	Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	70.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Terminal Panel
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	13.0 a

Part detail

Revision	AG
Type	AC
Mech. spec.	35T951
Base	
Status	PRD/A
Elec. spec.	35WGW183
Layout	35LYT951
Eff. date	05-07-2024
CD Diagram	CD0307
Poles	02
Leads	4#14 A&J,1#18 B PH,1#10 #1TH
Proprietary	False
Created date	06-22-2007

Insulation Class	B
Inverter Code	Not Inverter
KVA Code	G
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Terminal Panel Or Lead Hole
Motor Lead Quantity/Wire Size	4 @ 14 AWG, A&J
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3528L
Mounting Arrangement	F1
Number of Poles	2
Overall Length	13.25 IN
Power Factor	69
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Ext Thread
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.20
Shaft Diameter	0.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Fixed Opposite Standard
Shaft Slinger Indicator	No Slinger
Speed	3450 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Do Not Use Eve-Not Valid
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	Automatic Thermal Overload
Winding Thermal 1 Location	SB

Winding Thermal 2

None

Nameplate

NP1257L									
CAT.NO.	CJL1317A								
SPEC.	35T951W183G1								
HP	2								
VOLTS	115/230								
AMP	26/13								
RPM	3450								
FRAME	56J			HZ	60		PH	1	
SER.F.	1.20	CODE	G	DES	L	CL	B		
NEMA-NOM-EFF	70	PF	69						
RATING	40C AMB-CONT								
CC									
DE	6205	ODE	6203						
ENCL	OPEN	SN							
	SFA 27.6/13.8								

AC Induction Motor Performance Data

Record # 9776

Typical performance - not guaranteed values

Winding: 35WGW183-R001			Type: 3528L		Enclosure: OPEN	
Nameplate Data				230 V, 60 Hz: High Voltage Connection		
Rated Output (HP)		2		Full Load Torque		3 LB-FT
Volts		115/230		Start Configuration		direct on line
Full Load Amps		26/13		Breakdown Torque		10.4 LB-FT
R.P.M.		3450		Pull-up Torque		5.9 LB-FT
Hz	60	Phase	1	Locked-rotor Torque		7.1 LB-FT
NEMA Design Code		L	KVA Code	Starting Current		79 A
Service Factor (S.F.)		1.2		No-load Current		9.3 A
NEMA Nom. Eff.		70	Power Factor	Line-line Res. @ 25°C		0.842 Ω A Ph 0.843 Ω B Ph
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		77°C
S.F. Amps		27.6/13.8		Temp. Rise @ S.F. Load		87°C

Load Characteristics 230 V, 60 Hz, 2 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	38	53	65	71	80	84	78
Efficiency	46	60	66	70	68	67.5	68.4
Speed	3569	3547	3523	3498	3469	3436	3475
Line amperes	9.5	10.3	11.4	13	14.7	16.8	13.8


ABB Motors and Mechanical Inc.


WINDING # 35WGW183

Typical performance - not guaranteed values.


2 HP 1 PH 60 HZ 3450 RPM 230 V 3528L

TORQUES (LB-FT): PO=10.4 PU=5.9 LR=7.1 LRA=79

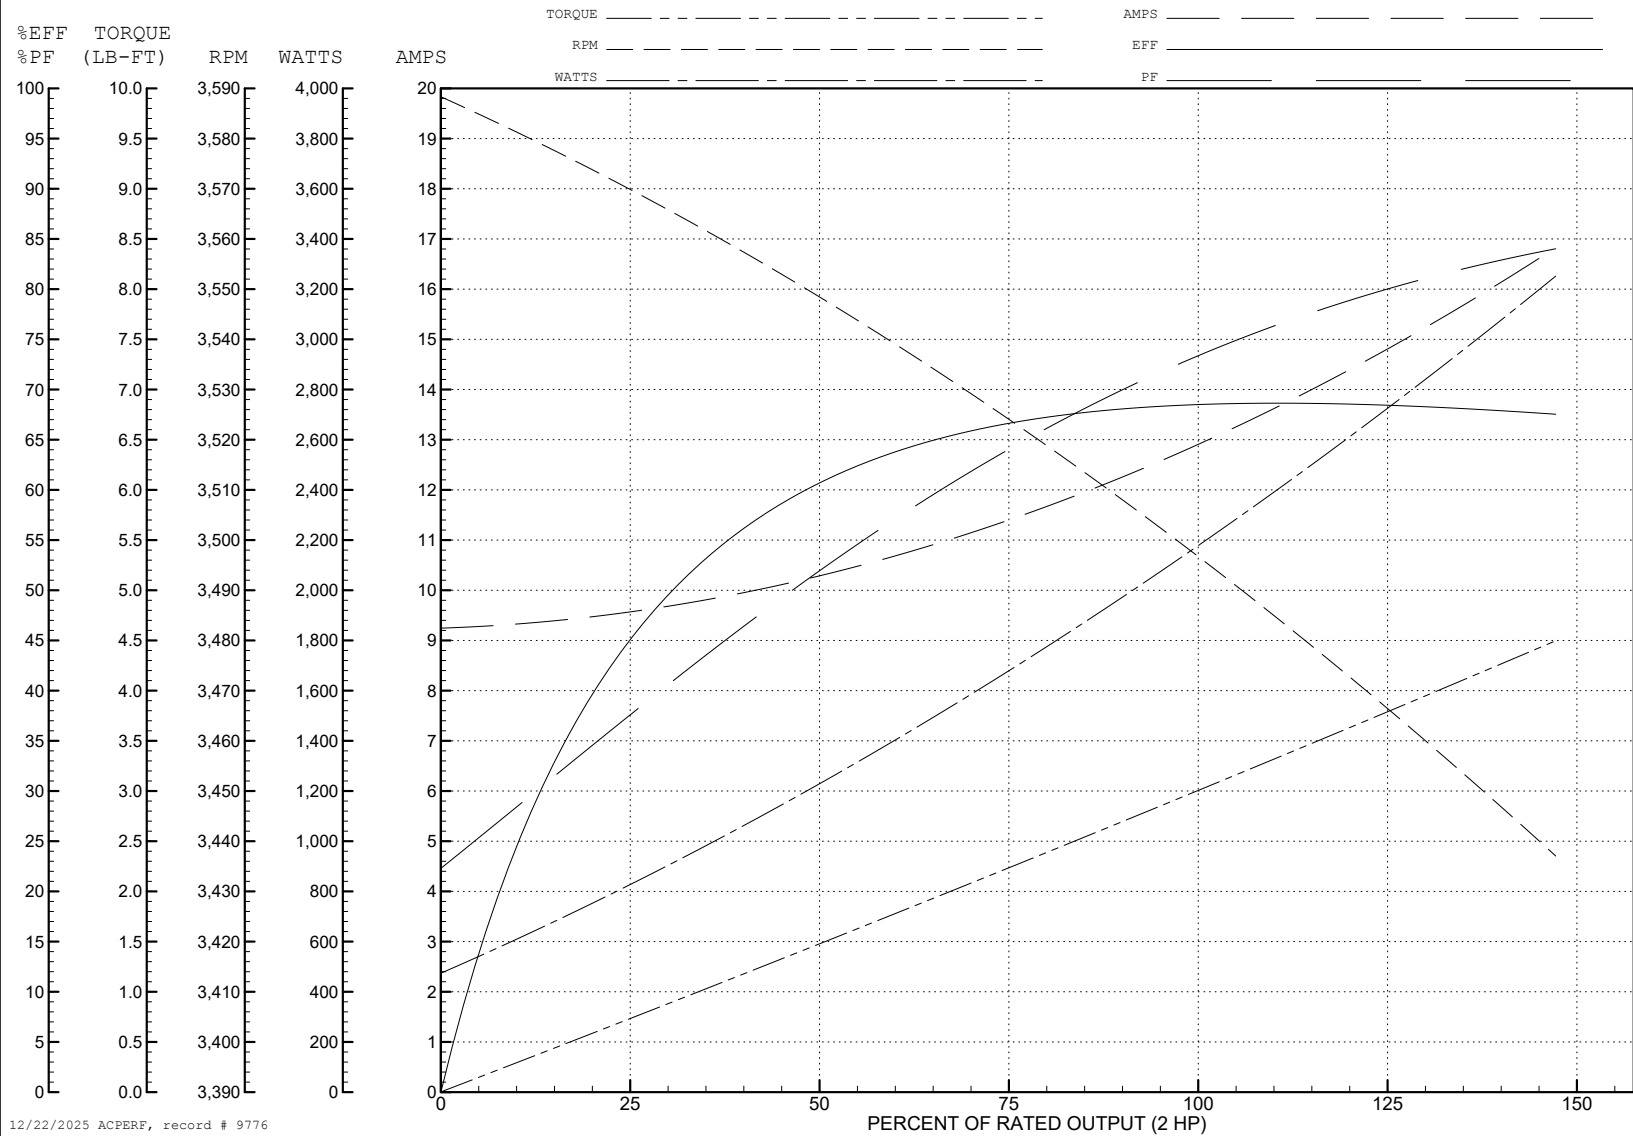

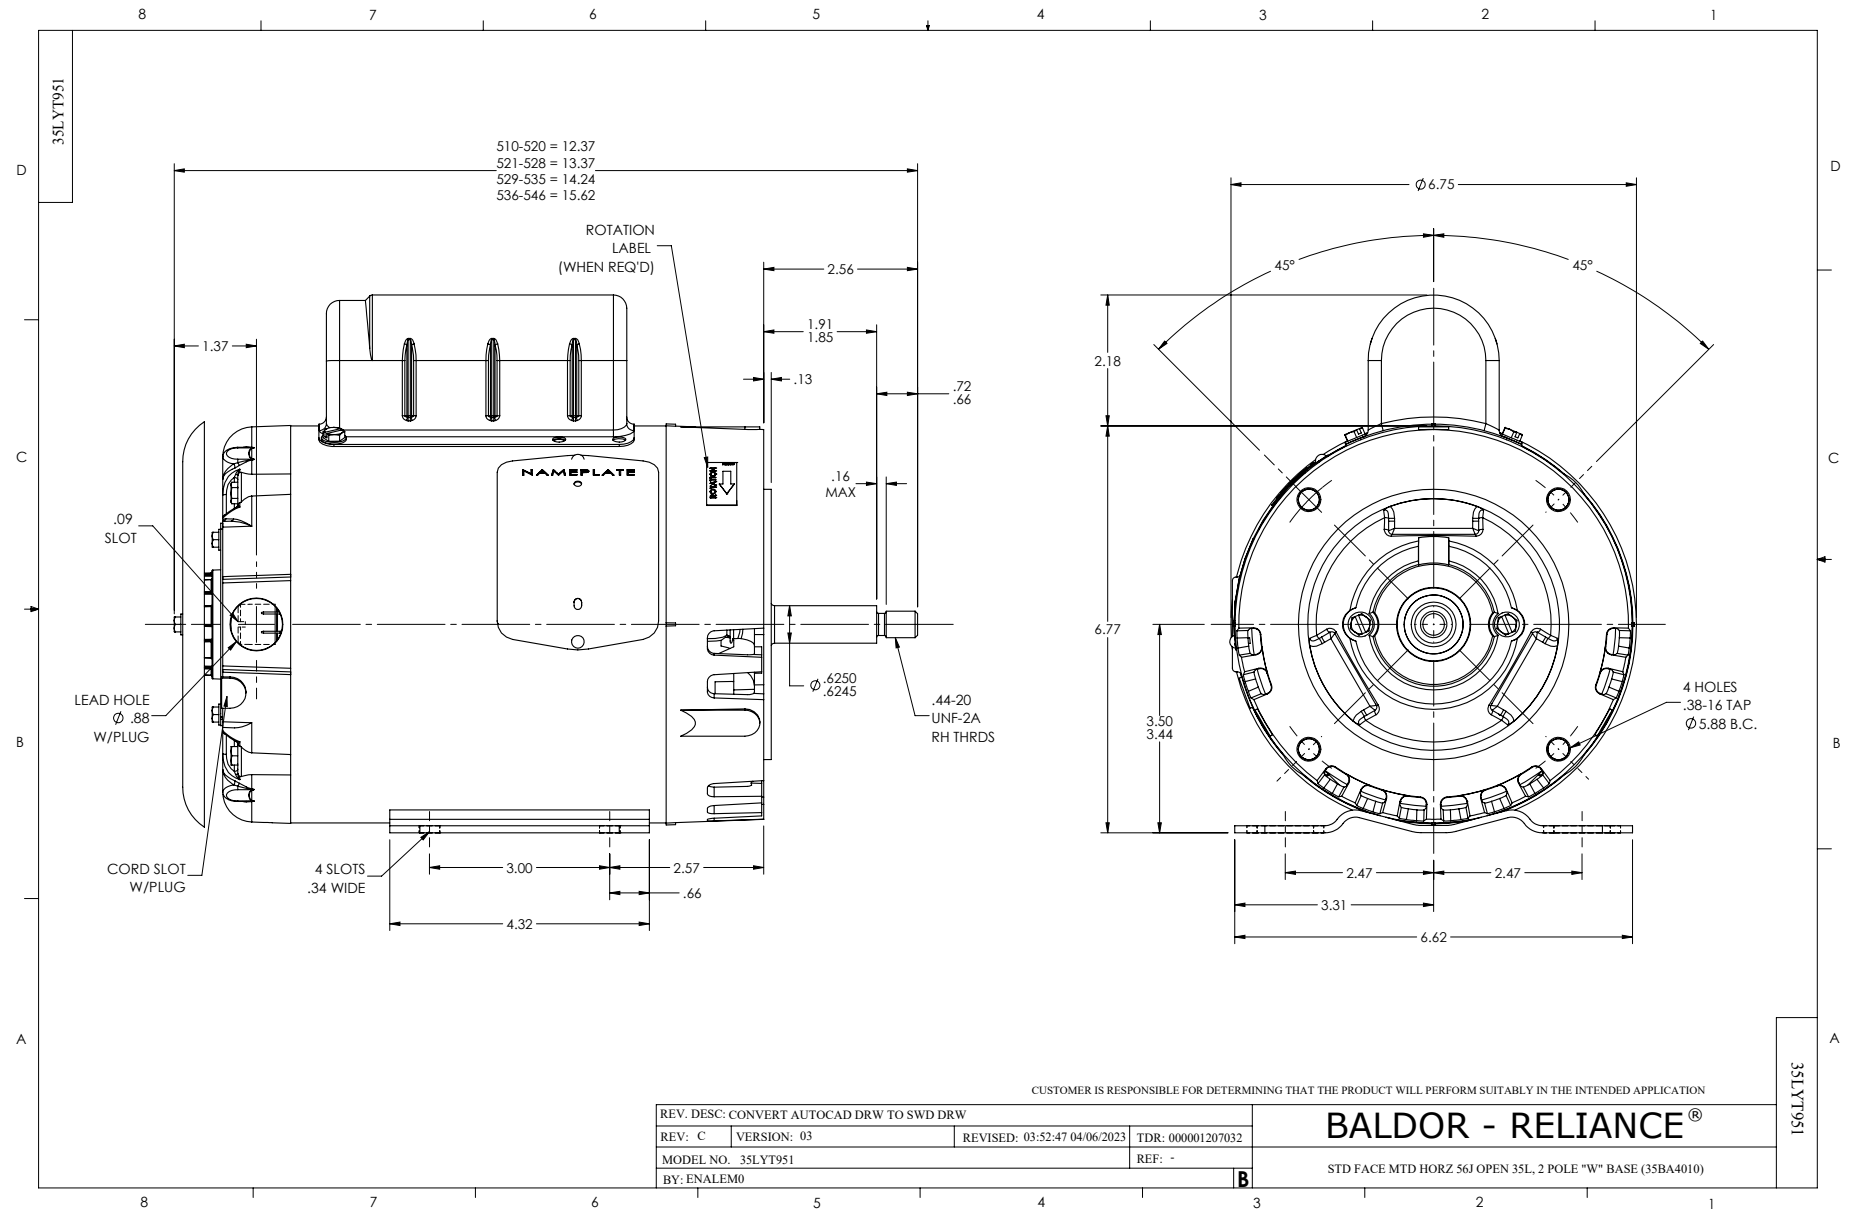

CD0307

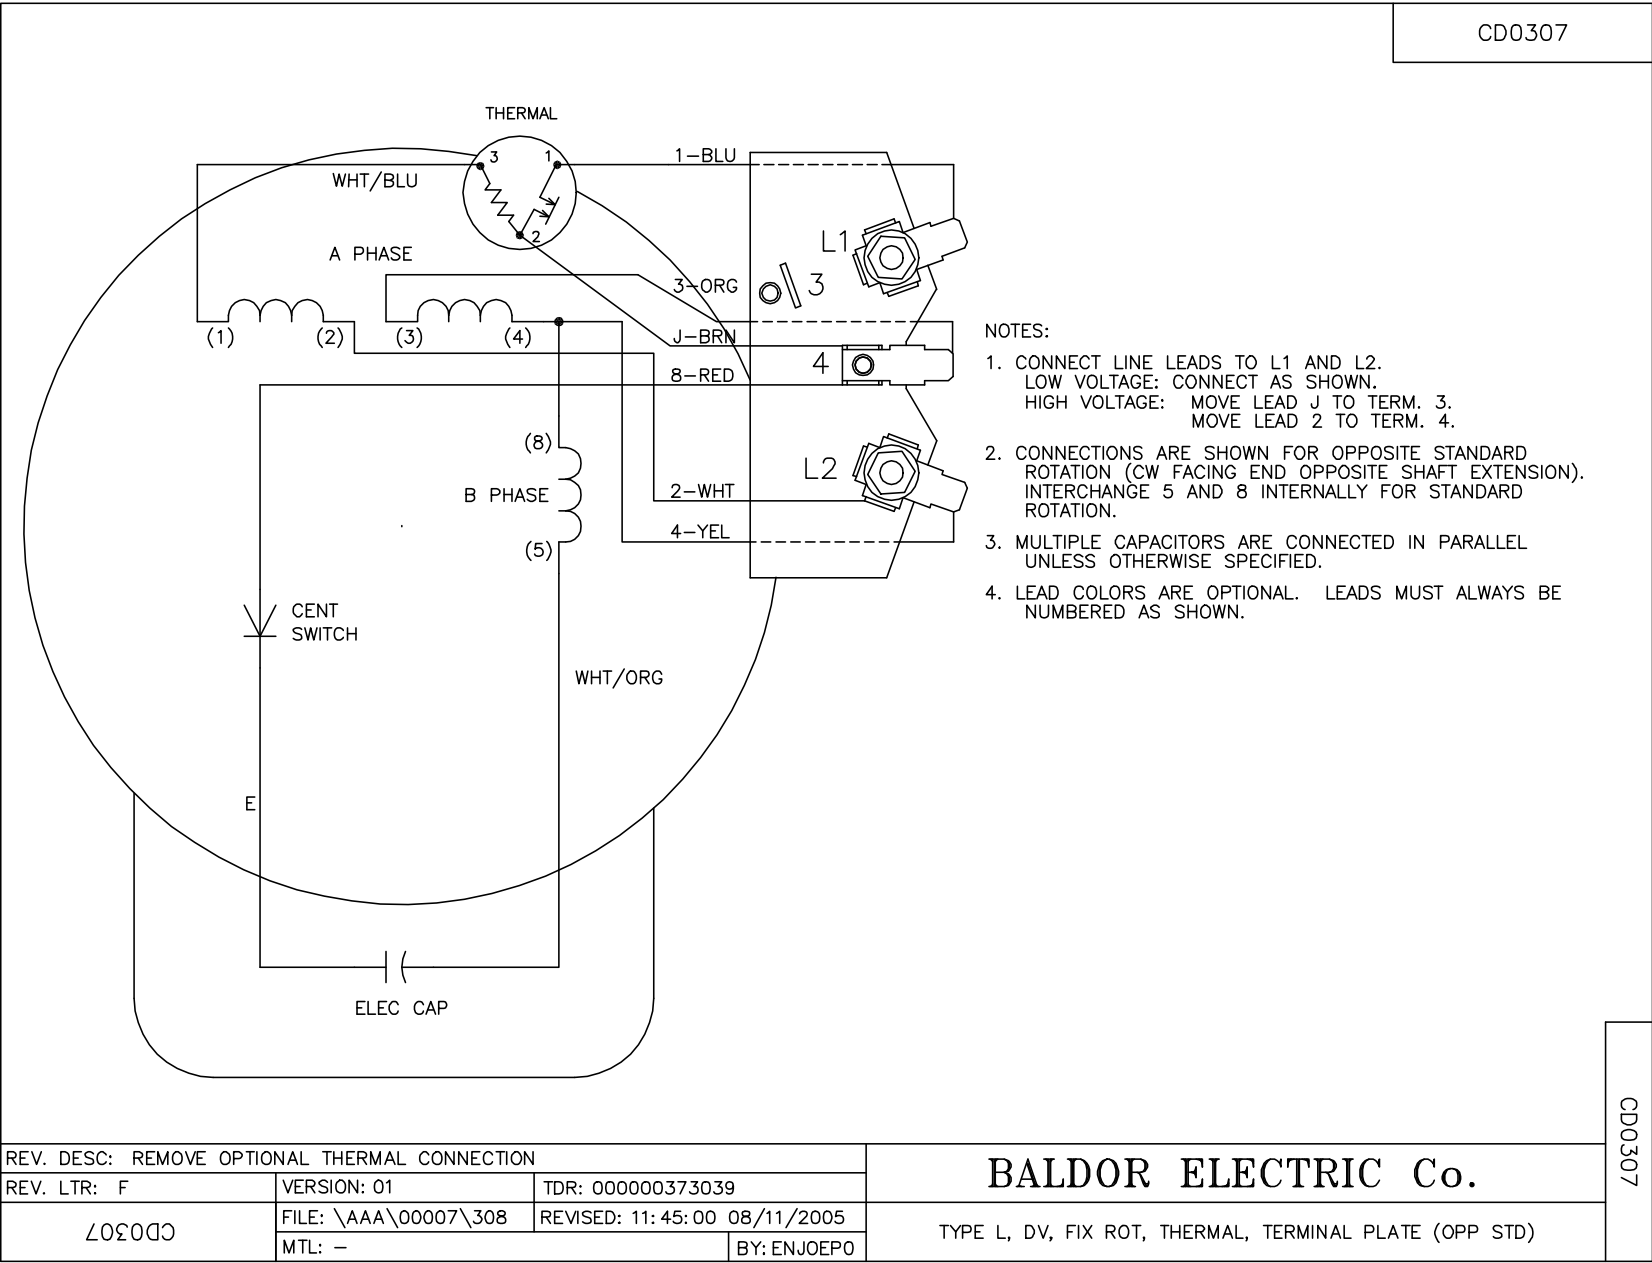

REV. DESC: REMOVE OPTIONAL THERMAL CONNECTION		
REV. LTR: F	VERSION: 01	TDR: 000000373039
CD0307	FILE: \AAA\00007\308	REVISED: 11:45:00 08/11/2005
	MTL: -	BY: ENJOEP0

BALDOR ELECTRIC Co.

TYPE L, DV, FIX ROT, THERMAL, TERMINAL PLATE (OPP STD)

CD0307