



Customer information packet

CPX18346T

3//2HP, 1755//1465RPM, 3PH, 60//50HZ, 182T, X

Class - CLI GP C,D; CLII GP E,F,G

Division - Division I

Specifications

Enclosure	XPFC
Frame	182T
Frame Material	Iron
Frequency	50.00 Hz 60.00 Hz
Haz Area Class and Group	CLI GP C,D; CLII GP E,F,G
Haz Area Division	Division I
Motor Letter Type	Three Phase
Output @ Frequency	2.000 HP @ 50 HZ 3.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 190.0 V @ 50 HZ 460.0 V @ 60 HZ 380.0 V @ 50 HZ
Agency Approvals	UL CSA EEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	6
Current @ Voltage	8.200 A @ 230.0 V 7.000 A @ 190.0 V 4.100 A @ 460.0 V 3.500 A @ 380.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT

Part detail

Revision	L
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	06WGX181
Layout	06LYJ961
Eff. date	05-02-2024
CD Diagram	CD0005
Poles	04
Leads	9#16
Proprietary	False
Created date	02-05-2019

Efficiency @ 100% Load	89.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Enclosure Modification	Severe Duty Features
Feedback Device	NO FEEDBACK
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	3.5 a
Insulation Class	F
Inverter Code	Inverter Duty
IP Rating	IP55
KVA Code	J
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	2700 rpm
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0632M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	17.59 IN
Power Factor	77
Product Family	Super-E Chemical Processing
Pulley Face Code	Standard
Rodent Screen	None
RoHS Status	ROHS NON-COMPLIANT
Service Factor	1.00
Shaft Diameter	1.125 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Speed	1755 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat

Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP2033XPSLEV													
NO.						CC	010A						
S/N						TEMP CODE			T3C				
SPEC.	06-0000-0019					INV.TYPE			PWM				
CAT.NO.	CPX18346T					C HP FR		60	C HP TO		90		
HP	3//2					CT HZ FROM			6	CT HZ TO		60	
VOLTS	230/460//190/380					VT HZ FROM			6	VT HZ TO		60	
AMPS	8.2/4.1//7/3.5				MAG CUR	4.2/2.1							
RPM	1755//1465				MX RPM	2700							
HZ	60//50	PH	3	CL	F	NOM.EFF.		89.5					
SER.F.	1.00	DES	B	SL HZ	1.5	WK2		0.3					
FRAME	182T	RATING		40C AMB-CONT									
BLANK	55C AMB AT 1.00 SF SINEWAVE												
	NEMA MG-1 PART 5, IP55				1.15 SF SINEWAVE								

AC Induction Motor Performance Data

Record # 72220

Typical performance - not guaranteed values

Winding: 06WGX181-R087		Type: 0632M	Enclosure: XPFC			
Nameplate Data			460 V, 60 Hz: High Voltage Connection			
Rated Output (HP)	3//2	Full Load Torque	9.08 LB-FT			
Volts	230/460//190/380	Start Configuration	direct on line			
Full Load Amps	8.2/4.1//7/3.5	Breakdown Torque	33.1 LB-FT			
R.P.M.	1755//1465	Pull-up Torque	18.2 LB-FT			
Hz	60//50	Phase	3	Locked-rotor Torque	20.4 LB-FT	
NEMA Design Code	B	KVA Code	J	Starting Current	29.8 A	
Service Factor (S.F.)	1	No-load Current	2.14 A			
NEMA Nom. Eff.	89.5	Power Factor	77	Line-line Res. @ 25°C	3.93 Ω	
Rating - Duty	40C	AMB-CONT	Temp. Rise @ Rated Load			35°C
S.F. Amps		Temp. Rise @ S.F. Load			42°C	
		Locked-rotor Power Factor			41.4	
		Rotor inertia			0.298 LB-FT2	

Load Characteristics 460 V, 60 Hz, 3 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	38	58	70	77	81	83
Efficiency	83.5	88.9	90	89.8	89.1	87.7
Speed	1790	1779	1769	1757	1744	1730
Line amperes	2.34	2.79	3.39	4.1	4.91	5.86


ABB Motors and Mechanical Inc.

WINDING # 06WGX181

Typical performance - not guaranteed values.

3 HP 3 PH 60 HZ 1757 RPM 460 V 0632M

TORQUES (LB-FT): PO=33.1 PU=18.2 LR=20.4 LRA=29.8

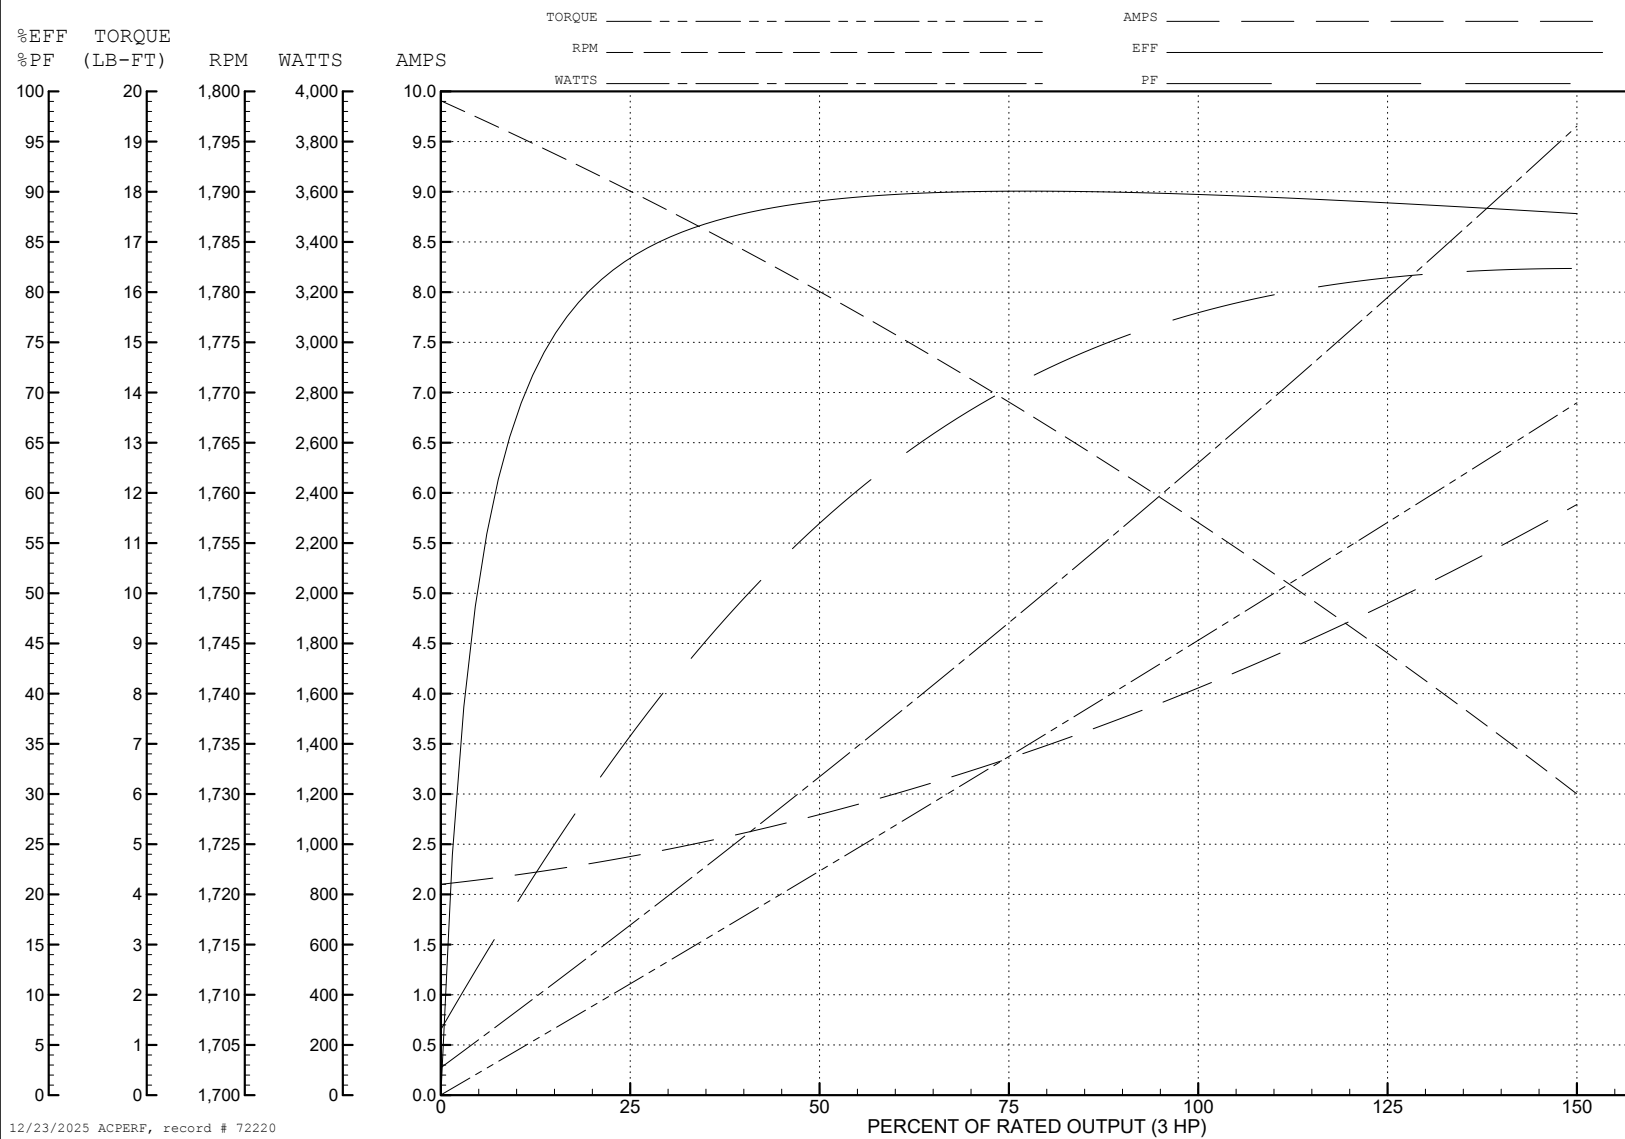

AC Induction Motor Performance Data

Record # 72221

Typical performance - not guaranteed values

Winding: 06WGX181-R087		Type: 0632M	Enclosure: XPFC			
Nameplate Data			380 V, 50 Hz: High Voltage Connection			
Rated Output (HP)	3//2		Full Load Torque	7.25 LB-FT		
Volts	230/460//190/380		Start Configuration	direct on line		
Full Load Amps	8.2/4.1//7/3.5		Breakdown Torque	31.25 LB-FT		
R.P.M.	1755//1465		Pull-up Torque	18.55 LB-FT		
Hz	60//50	Phase	3	Locked-rotor Torque	20.79 LB-FT	
NEMA Design Code	B		KVA Code	J	Starting Current	28.72 A
Service Factor (S.F.)				1	No-load Current	2.11 A
NEMA Nom. Eff.	89.5	Power Factor	7	7	Line-line Res. @ 25°C	3.93 Ω
Rating - Duty	40C		AMB-CONT		Temp. Rise @ Rated Load	28°C
S.F. Amps					Temp. Rise @ S.F. Load	32°C
					Locked-rotor Power Factor	46.1
					Rotor inertia	0.298 LB-FT2

Load Characteristics 380 V, 50 Hz, 2 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	33	52	65	73	78	81
Efficiency	79.7	86.5	88.4	88.7	88.4	87.1
Speed	1491	1483	1474	1465	1455	1443
Line amperes	2.25	2.57	3.01	3.53	4.14	4.87


ABB Motors and Mechanical Inc.


WINDING # 06WGX181

Typical performance - not guaranteed values.

2 HP 3 PH 50 HZ 1465 RPM 380 V 0632M

TORQUES (LB-FT): PO=31.25 PU=18.55 LR=20.79 LRA=28.72

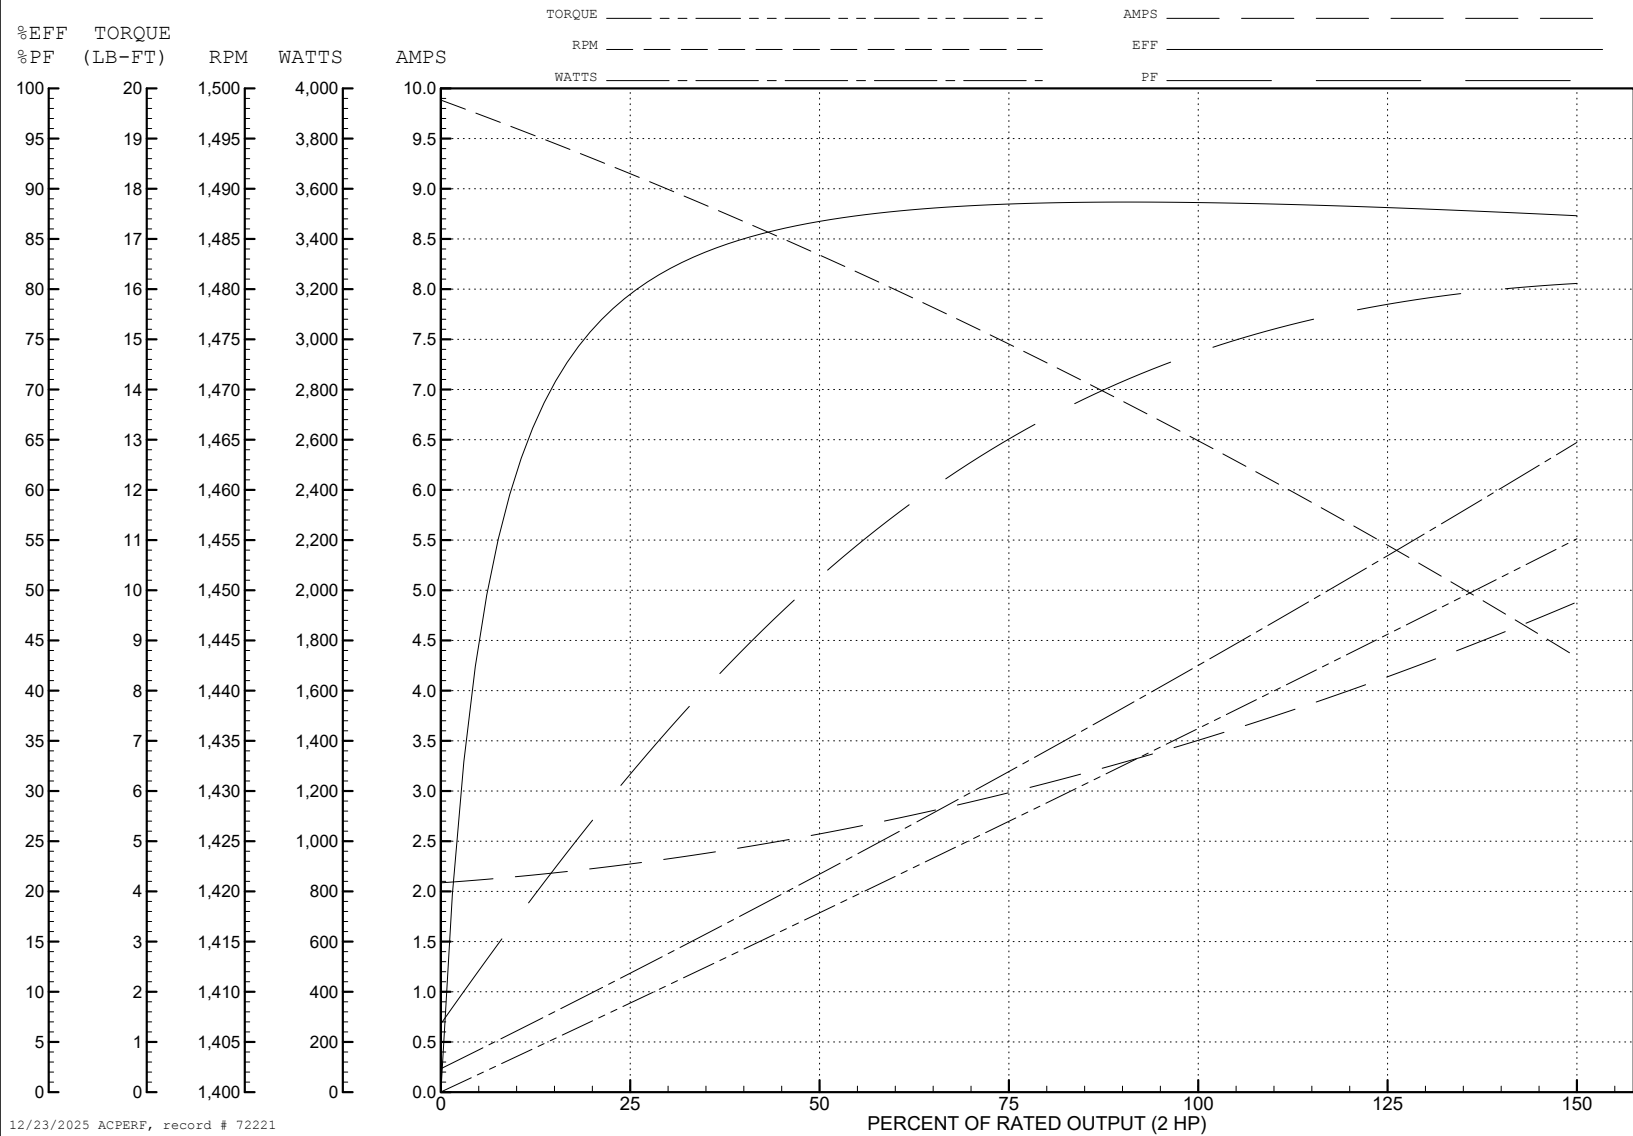

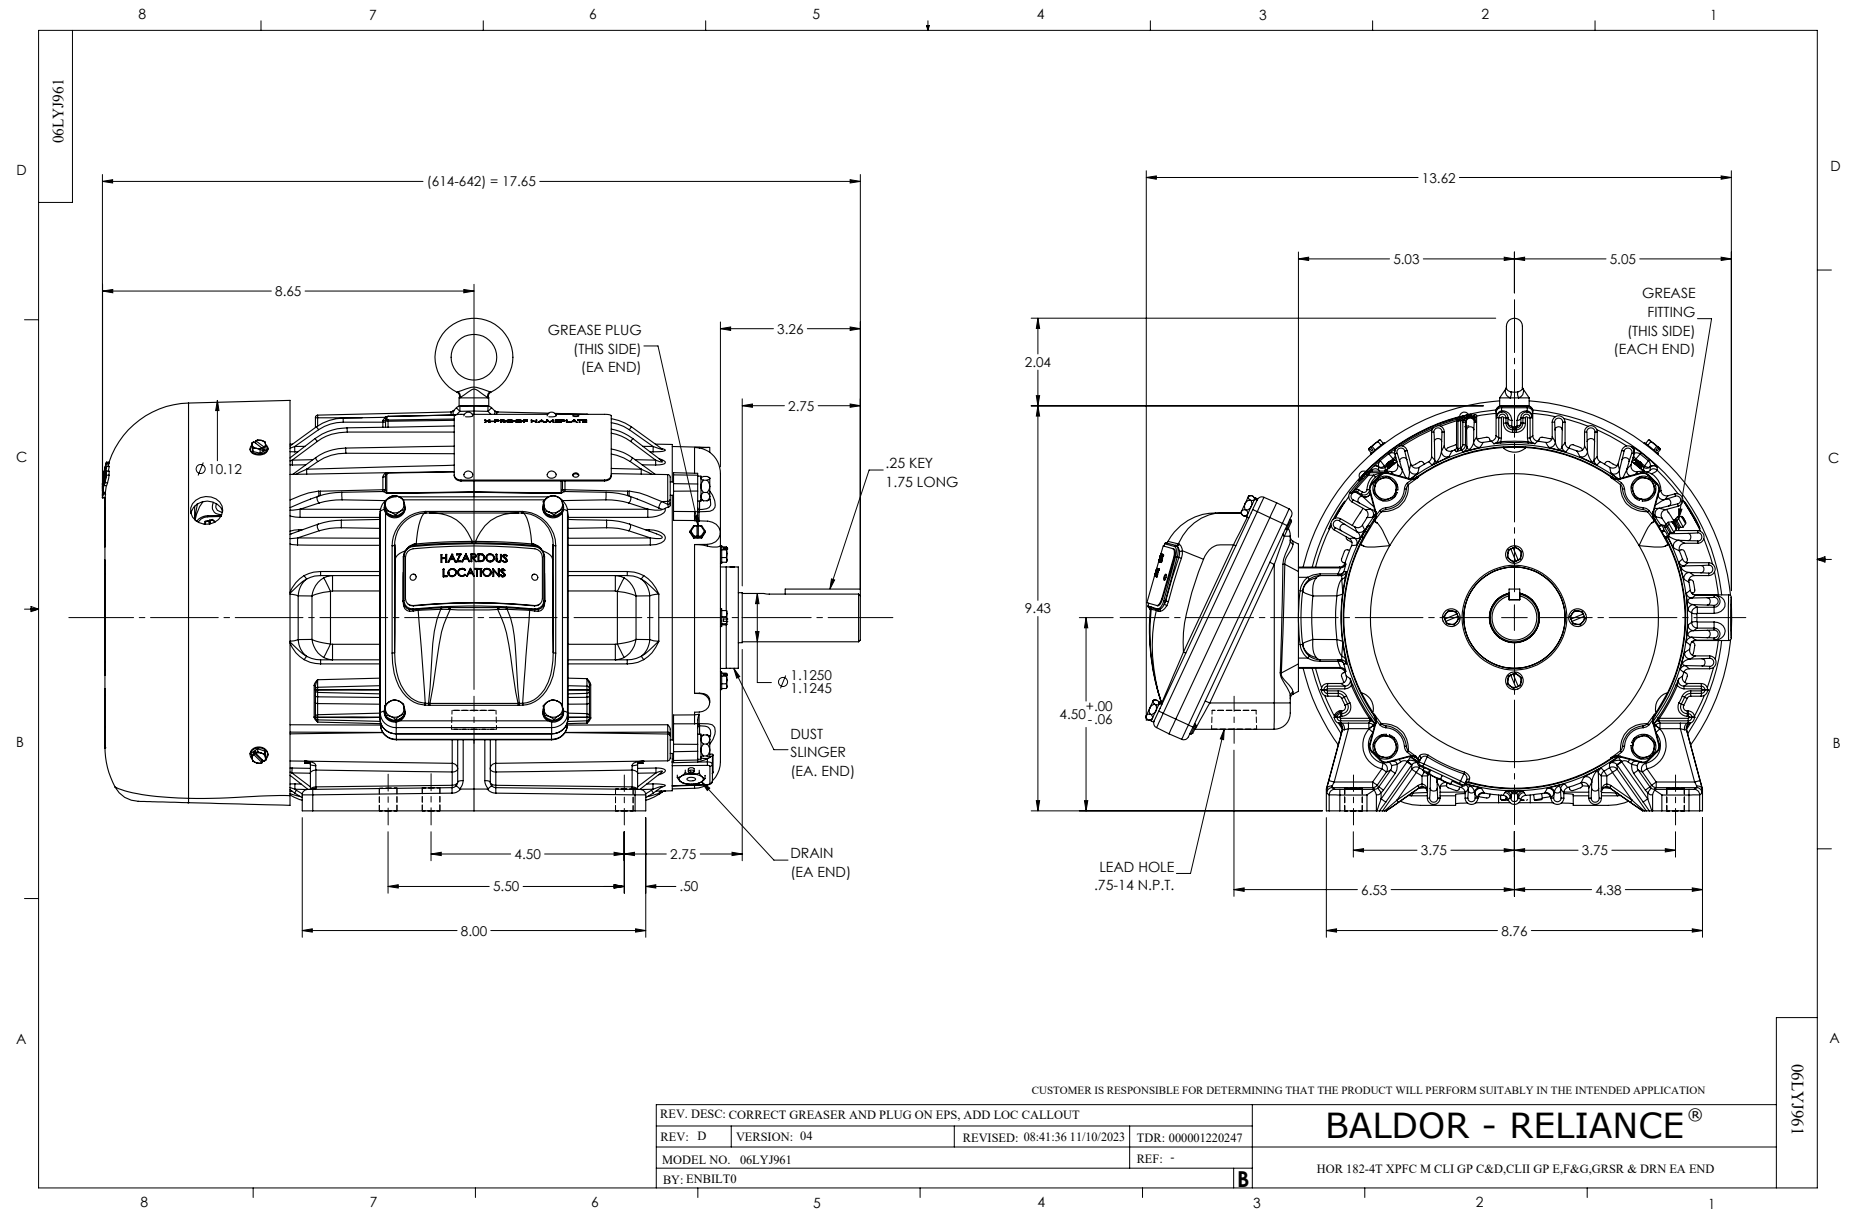

CD0005



- NOTES:
- 1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
 - 2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
 - 3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
 - 4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
900000		FILE: AAA00005140	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS

CD0005