



Customer information packet

CSPM3714T-G

10HP, 1775RPM, 3PH, 60HZ, 215TC, 3756M, TEFC, F

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	215TC
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	10.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	WEEE NEMA PREMIUM
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	13.000 A @ 460.0 V 26.000 A @ 230.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	92.4 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	13.0 a
Insulation Class	F

Part detail

Revision	A
Type	AC
Mech. spec.	37T745
Base	
Status	PRD/A
Elec. spec.	37WGZ669
Layout	37LYT745
Eff. date	11-19-2025
CD Diagram	CD0005
Poles	04
Leads	9#14
Proprietary	False
Created date	04-04-2025

Inverter Code	Inverter Duty
KVA Code	L
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	2700 rpm
Motor Lead Quantity/Wire Size	9 @ 14 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3756M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	21.25 IN
Power Factor	78
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.15
Shaft Diameter	1.375 IN
Shaft Ground Indicator	Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1775 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

NP4423A01A01L												
CAT #	CSPM3714T-G				WGT	187	LBS					
SPEC	37T745Z669				ENCL	TEFC						
SER #					CC	010A	IP	54				
HP	10	MAG CUR			12.8/6.4							
VOLTS	230/460					NEMA NOM. EFF			92.4			
AMPS	26/13					PF	78					
RATING	40C AMB-CONT											
RPM	1775				MAX RPM		2700					
FRAME	215TC	HZ	60	CODE		L	CLASS		H			
SER.F.	1.25	SF AMP	31/15.5			PH	3	DES	A			
DE	6307		ODE	6206								
LUBRICATION	POLYREX EM											
ID LOGO	INVERTER TYPE		VPWM		CHP	60	TO	90	1.5:1			
ID LOGO	WK2	1.38	CT	6	TO	60	10:1					
ID LOGO	SL HZ	0.8	VT	3	TO	60	20:1					
						QR						
YR												

AC Induction Motor Performance Data

Record # 112287

Typical performance - not guaranteed values

Winding: 37WGZ669-R003			Type: 3756M		Enclosure: TEFC		
Nameplate Data			460 V, 60 Hz: High Voltage Connection				
Rated Output (HP)		10	Full Load Torque		29.66 LB-FT		
Volts		230/460	Start Configuration		direct on line		
Full Load Amps		26/13	Breakdown Torque		125 LB-FT		
R.P.M.		1775	Pull-up Torque		60.3 LB-FT		
Hz	60	Phase	3	Locked-rotor Torque		75.2 LB-FT	
NEMA Design Code		A	KVA Code	L	Starting Current		121 A
Service Factor (S.F.)		1.25	No-load Current		6.42 A		
NEMA Nom. Eff.		92.4	Power Factor	78	Line-line Res. @ 25°C		0.748 Ω
Rating - Duty		40C	AMB-CONT		Temp. Rise @ Rated Load		60°C
S.F. Amps		31.2/15.6	Temp. Rise @ S.F. Load		81°C		
			Locked-rotor Power Factor		34.4		
			Rotor inertia		1.38 lb-ft²		

Load Characteristics 460 V, 60 Hz, 10 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	38	60	71	78	82	84	82
Efficiency	87.3	91.8	92.8	92.8	92.3	91.5	92.3
Speed	1793	1787	1781	1774	1767	1759	1767
Line amperes	7.04	8.54	10.6	12.9	15.5	18.3	15.5


ABB Motors and Mechanical Inc.

WINDING # 37WGZ669

Typical performance - not guaranteed values.

10 HP 3 PH 60 HZ 1775 RPM 460 V 3756M

TORQUES (LB-FT): PO=125 PU=60.3 LR=75.2 LRA=121

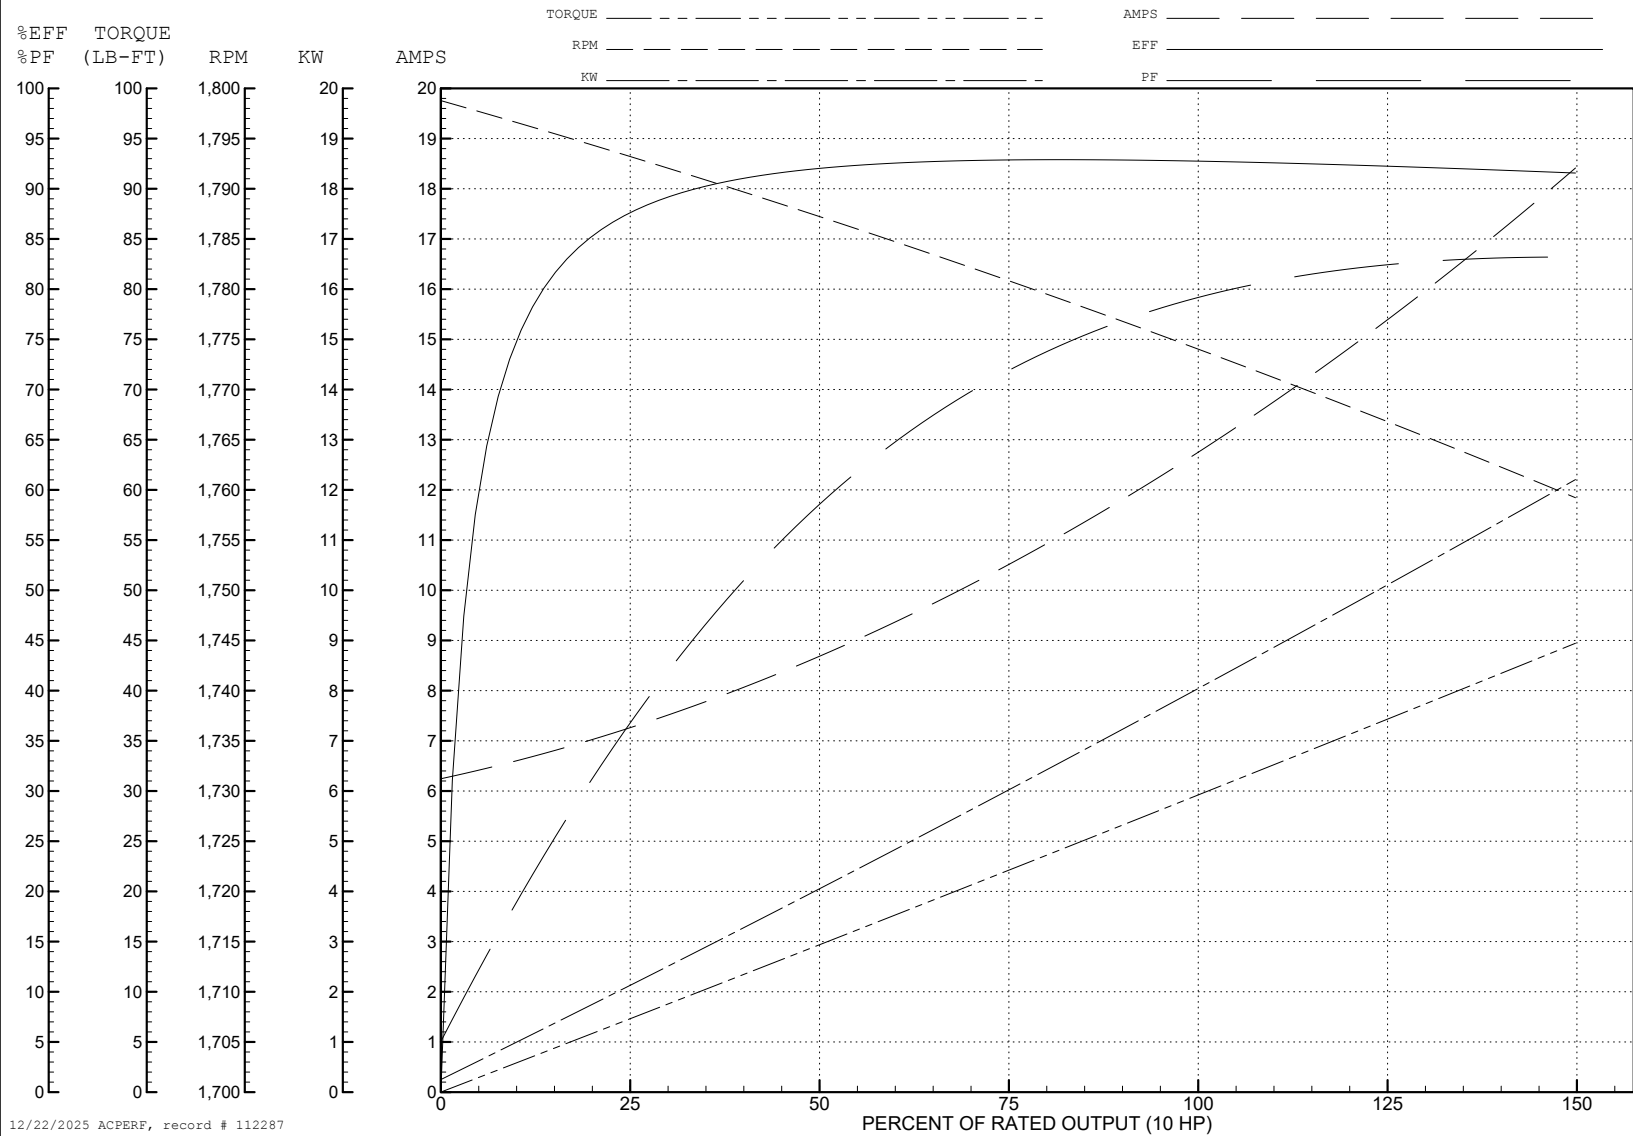

12/22/2025 ACPERF, record # 112287

