



Customer information packet

CSPM4313TS

75HP, 3555RPM, 3PH, 60HZ, 365TSC, A36068M, TEF

Class - CLI GP A,B,C,D; CLII GP F,G

Division - Division II

Specifications

Enclosure	TEFC
Frame	365TSC
Frame Material	Cast Iron
Frequency	60.00 Hz
Haz Area Class and Group	CLI GP A,B,C,D; CLII GP F,G
Haz Area Division	Division II
Motor Letter Type	Three Phase
Output @ Frequency	75.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	CCSAUSEEV CURUSEEV NEMA_PREMIUM
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Current @ Voltage	161.000 A @ 230.0 V 80.700 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	95.0 %
Feedback Device	NO FEEDBACK
Heater Indicator	No Heater
High Voltage Full Load Amps	80.7 a
Insulation Class	F
Inverter Code	Inverter Duty
KVA Code	G
Lifting Lugs	Standard Lifting Lugs

Part detail

Revision	A
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	A36WG1545
Layout	617438-610
Eff. date	05-28-2025
CD Diagram	416820-002
Poles	02
Leads	3#2,6#4
Proprietary	False
Created date	12-10-2024


Max Speed	4200 rpm
Motor Lead Quantity/Wire Size	3 @ 2 AWG
Motor Standards	NEMA
Motor Type	A36068M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	31.36 IN
Power Factor	91
Product Family	General Industrial
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Service Factor	1.00
Shaft Diameter	1.875 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	3555 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None

Nameplate

NP2496L	
MOBILE POLYREX EM	



NP4562L

CAT NO	CSPM4313TS			SPEC NO.			A36-0004-1545			I.P.			55								
HP	75	AMPS	161/80.7			VOLTS			230/460			DESIGN			B						
FRAME SIZE	365TSC		RPM	3555			MAX RPM			4200	HZ	60	AMB	40	C						
D.E. BRG.	65BC03J30X			PH.3	3	DUTY	CONT			INSUL.CLASS			F								
O.D.E. BRG.	65BC03J30X			TYPE P			ENCL			TEFC	SF	1.15	CODE	G							
POWER FACTOR	91		MAX CORR KVAR			5			NEMA NOM EFFICIENCY			95			MOTOR WEIGHT						LBS
CL.I,DIV 2,GRP:	A,B,C,D		T.CODE	T3			CL.1,ZONE 2,GRP:			IIA,IIB,IIC			T=	200		C	INVERTER T.CODE			T3	
CL.II,DIV 2,GRP:	F,G	T.CODE	T3C			CL II ZONE 22 GRPS IIIB			T=			160		C	INVERTER T.CODE			T3			
ID LOGO	INV TYPE:		VPWM	CT	15	TO	60	VT	3	TO	60	CHP	60	TO	70						
ID LOGO	1.0 SF VPWM		WK2	8.642			LBFT2			SL HZ	0.75		MAG CUR		31/15.5						
SER.NO.				MEETS INTENT OF IEEE-45						FOR WEATHER PROTECTION											

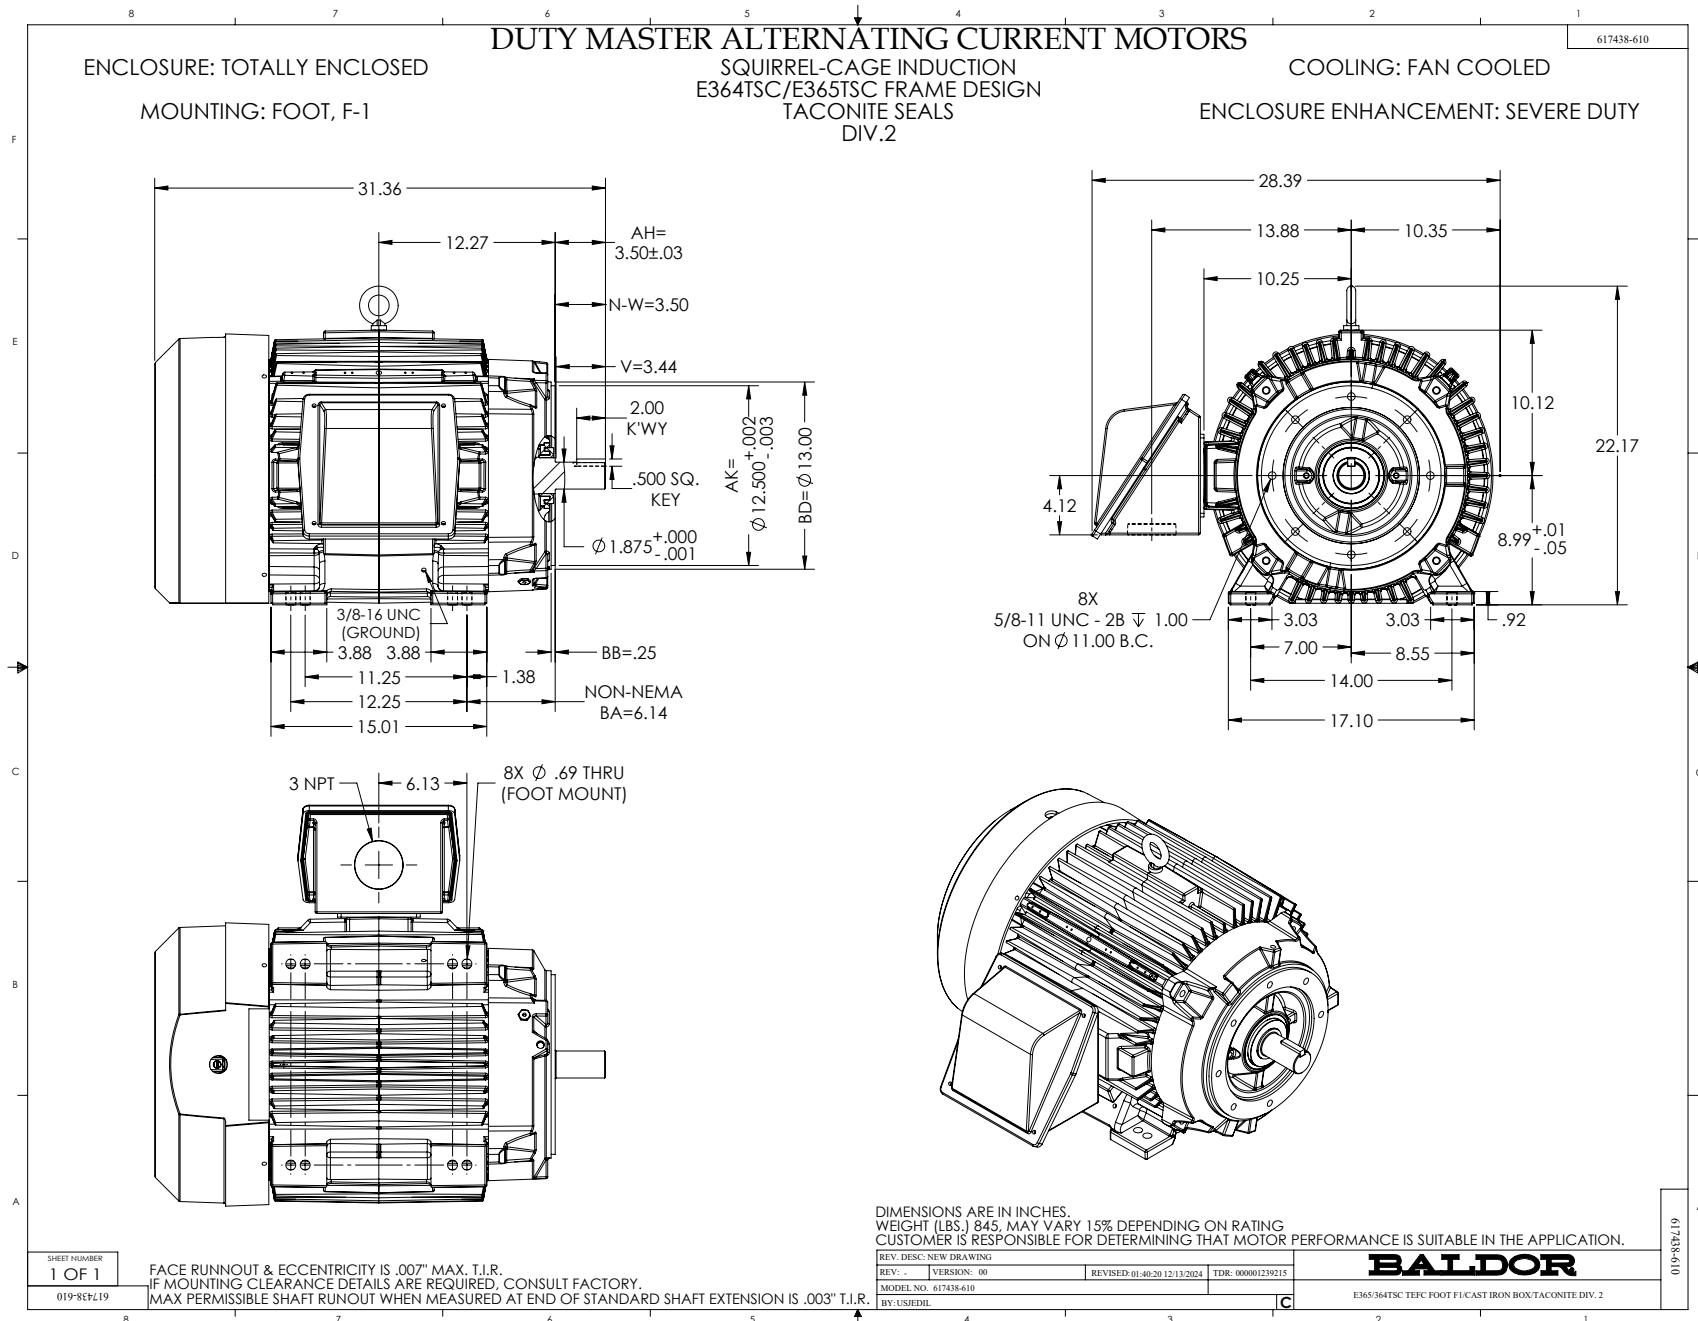

416820-002

A-C MOTOR
CONNECTION DIAGRAM
STANDARD 9 LEAD DELTA-CONNECTED

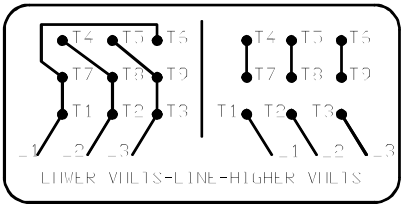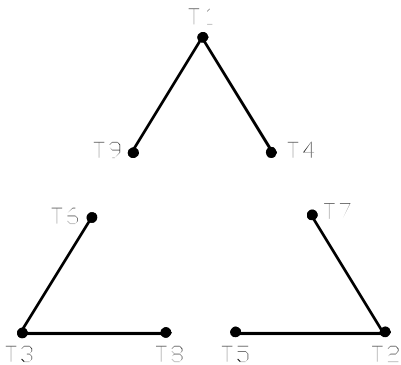

(N.P. 1575-B)

REV. DESC: FONT CHANGE FOR PDF SEARCHABLE		
REV. LTR: A	VERSION: 01	TDR: 000001009382
FILE: \MGA\00000\661	REVISED: 02:46:19 02/13/2020	BY: MGHMTT
MTL: —		

BALDOR - RELIANCE®

CONN DIAG — STANDARD 9 LEAD, DELTA-CONNECTED
SH 1 of 1

416820-002