



Customer information packet

CSPM4400T-4

100HP, 1790RPM, 3PH, 60HZ, 405TC, A4076M, TEFC

Class - CLI GP A,B,C,D; CLII GP F,G

Division - Division II

Specifications

Enclosure	TEFC
Frame	405TC
Frame Material	Cast Iron
Frequency	60.00 Hz
Haz Area Class and Group	CLI GP A,B,C,D; CLII GP F,G
Haz Area Division	Division II
Motor Letter Type	Three Phase
Output @ Frequency	100.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	CCSAUSEEV CURUSEEV NEMA_PREMIUM
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Current @ Voltage	115.000 A @ 460.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	96.2 %
Feedback Device	NO FEEDBACK
Heater Indicator	No Heater
High Voltage Full Load Amps	115.0 a
Insulation Class	H
Inverter Code	Inverter Duty
KVA Code	H
Lifting Lugs	Standard Lifting Lugs
Max Speed	2700 rpm
Motor Lead Quantity/Wire Size	3 @ 2 AWG

Part detail

Revision	B
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	A40WG5789
Layout	617437-733
Eff. date	08-28-2025
CD Diagram	416820-036
Poles	04
Leads	3#2
Proprietary	False
Created date	12-10-2024


Motor Standards	NEMA
Motor Type	A4076M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	38.19 IN
Power Factor	83
Product Family	General Industrial
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Service Factor	1.15
Shaft Diameter	2.875 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1790 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None

Nameplate

NP2496L	
MOBIL POLYREX EM	


NP4562L

CAT NO	CSPM4400T-4			SPEC NO.		A40-5004-5789			I.P.		55						
HP	100	AMPS	115		VOLTS		460		DESIGN		A						
FRAME SIZE	405TC	RPM	1790		MAX RPM		2700	HZ	60	AMB	40		C				
D.E. BRG.	80BC03J30X			PH.3	3	DUTY	CONT		INSUL.CLASS			H					
O.D.E. BRG.	80BC03J30X			TYPE P			ENCL	TEFC	SF	1.15	CODE	H					
POWER FACTOR	83		MAX CORR KVAR		26.1		NEMA NOM EFFICIENCY					96.2		MOTOR WEIGHT			LBS
CL.I,DIV 2,GRP:	A,B,C,D		T.CODE	T3A		CL.1,ZONE 2,GRP:					IIA,IIB,IIC		T=	180	C	INVERTER T.CODE	T3
CL.II,DIV 2,GRP:	F,G	T.CODE	T3C		CL II ZONE 22 GRPS IIIB					T=	160	C	INVERTER T.CODE		T3		
ID LOGO	INV TYPE:		VPWM	CT	15	TO	60	VT	3	TO	60	CHP	60	TO	90		
ID LOGO	1.0 SF VPWM		WK2	28.17		LBFT2		SL HZ	0.3		MAG CUR		42				
SER.NO.				MEETS INTENT OF IEEE-45						FOR WEATHER PROTECTION							

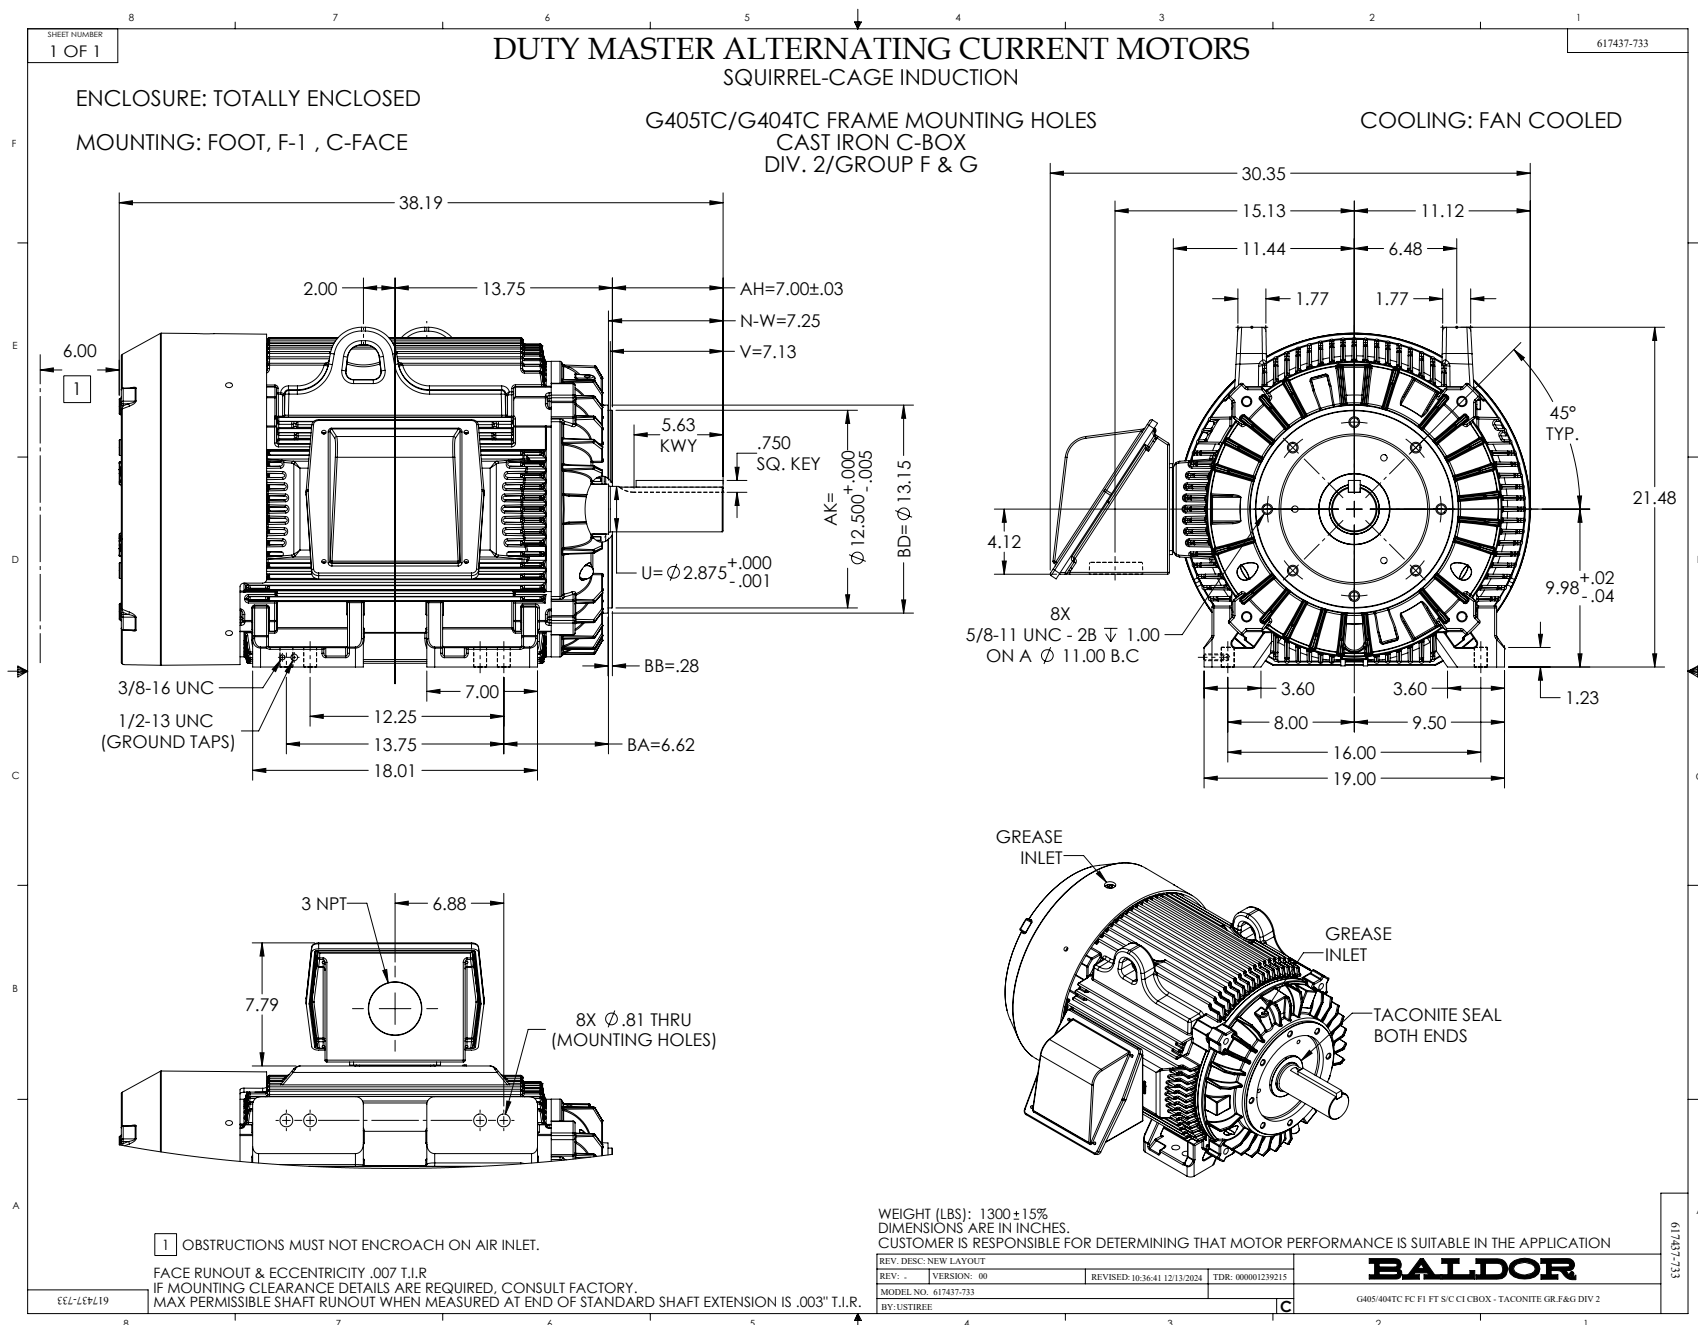

416820-036

A-C MOTOR
CONNECTION DIAGRAM
STANDARD 3 LEAD CONNECTED

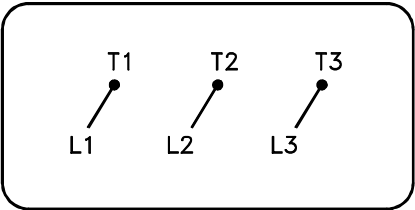

(N.P. 1575-BA)

416820-036

REV. DESC: LOADED TO BUS, C/R 335225		
REV. LTR: -	VERSION: 00	TDR: 000000538207
FILE: \MGA\00000\682	REVISED: 11: 54: 06 04/30/2010	
MTL: -	BY: RAGRA	

BALDOR

CONN DIAG - STANDARD 3 LEAD
SH 1 of 1