



Customer information packet

CXL050542A-50

.5HP, 1425RPM, 1PH, 50HZ, 56C, 3428L, XPFC, F1

Class - CLI GP D; CLII GP F,G

Division - Division I

Specifications

Enclosure	XPFC
Frame	56C
Frame Material	Steel
Frequency	50.00 Hz
Haz Area Class and Group	CLI GP D; CLII GP F,G
Haz Area Division	Division I
Motor Letter Type	Cap Start, Induction Run
Output @ Frequency	.500 HP @ 50 HZ
Phase	1
Synchronous Speed @ Frequency	1500 RPM @ 50 HZ
Voltage @ Frequency	110.0 V @ 50 HZ 220.0 V @ 50 HZ
Agency Approvals	CSA UL
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	3.600 A @ 220.0 V 7.200 A @ 110.0 V
Design Code	-
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	62.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	3.6 a
Insulation Class	B

Part detail

Revision	F
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	34WGW776
Layout	34LY5328
Eff. date	09-04-2024
CD Diagram	CD0565
Poles	04
Leads	6#18,1#16 4-YEL
Proprietary	False
Created date	04-29-2021

Inverter Code	Not Inverter
IP Rating	NONE
KVA Code	J
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3428L
Mounting Arrangement	F1
Number of Poles	4
Overall Length	15.22 IN
Power Factor	76
Product Family	Hazardous Location Motor
Pulley Face Code	C-Face
Rodent Screen	None
Service Factor	1.00
Shaft Diameter	0.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Speed	1425 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	Automatic Thermal Overload
Winding Thermal 1 Location	EP
Winding Thermal 2	None

Nameplate

NP0016XPSL									
NO.		CC							
SER. #									
SPEC	34-0000-0403								
CAT.NO.	CXL050542A-50								
H.P.	.5		T. CODE		T3C				
VOLTS	110/220								
AMPS	7.2/3.6								
R.P.M.	1425 34WGW776								
HZ	50		PH	1	CLASS		B		
SER.F.	1.00		DES	-	CODE		J		
RATING	40C AMB-CONT								
FRAME	56C		NEMA NOM. EFF		62				
		PF	76						
BLANK	NEMA MG-1 PART 5, IP54								

AC Induction Motor Performance Data

Record # 7095

Typical performance - not guaranteed values

Winding: 34WGW776-R001			Type: 3428L		Enclosure: TEFC		
Nameplate Data				220 V, 50 Hz: High Voltage Connection			
Rated Output (HP)		.5		Full Load Torque		1.8 LB-FT	
Volts		110/220		Start Configuration		direct on line	
Full Load Amps		7.2/3.6		Breakdown Torque		3.8 LB-FT	
R.P.M.		1425		Pull-up Torque		3.6 LB-FT	
Hz	50	Phase	1	Locked-rotor Torque		6 LB-FT	
NEMA Design Code		N	KVA Code	J	Starting Current		17 A
Service Factor (S.F.)		1		No-load Current		2.1 A	
NEMA Nom. Eff.		62	Power Factor	76	Line-line Res. @ 25°C		5 Ω A Ph 4.03 Ω B Ph
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		68°C	

Load Characteristics 220 V, 50 Hz, 0.5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	41	57	69	77	82	85	0
Efficiency	48	62.2	67.5	68.8	67.6	64.2	0
Speed	1481	1466	1448	1428	1402	1367	0
Line amperes	2.2	2.4	2.7	3.2	3.8	4.6	3.8


ABB Motors and Mechanical Inc.


WINDING # 34WGW776

Typical performance - not guaranteed values.


0.5 HP 1 PH 50 HZ 1425 RPM 220 V 3428L

TORQUES (LB-FT): PO=3.8 PU=3.6 LR=6 LRA=17

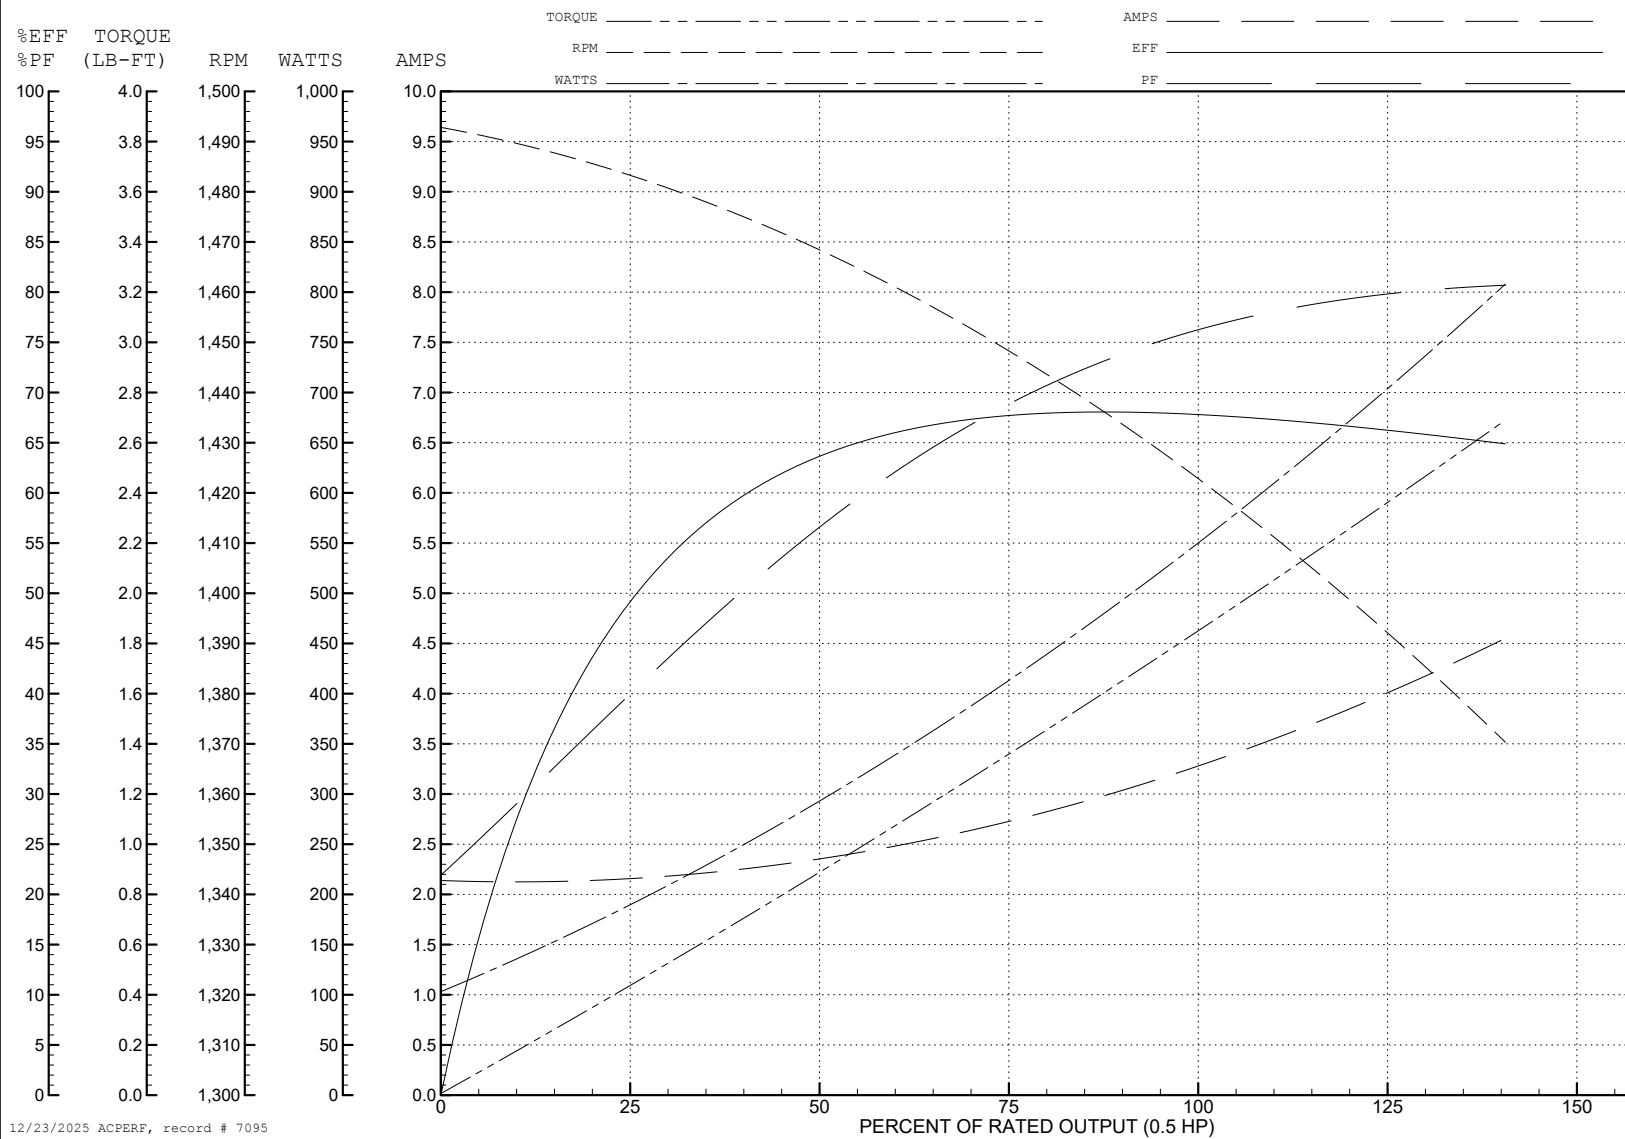

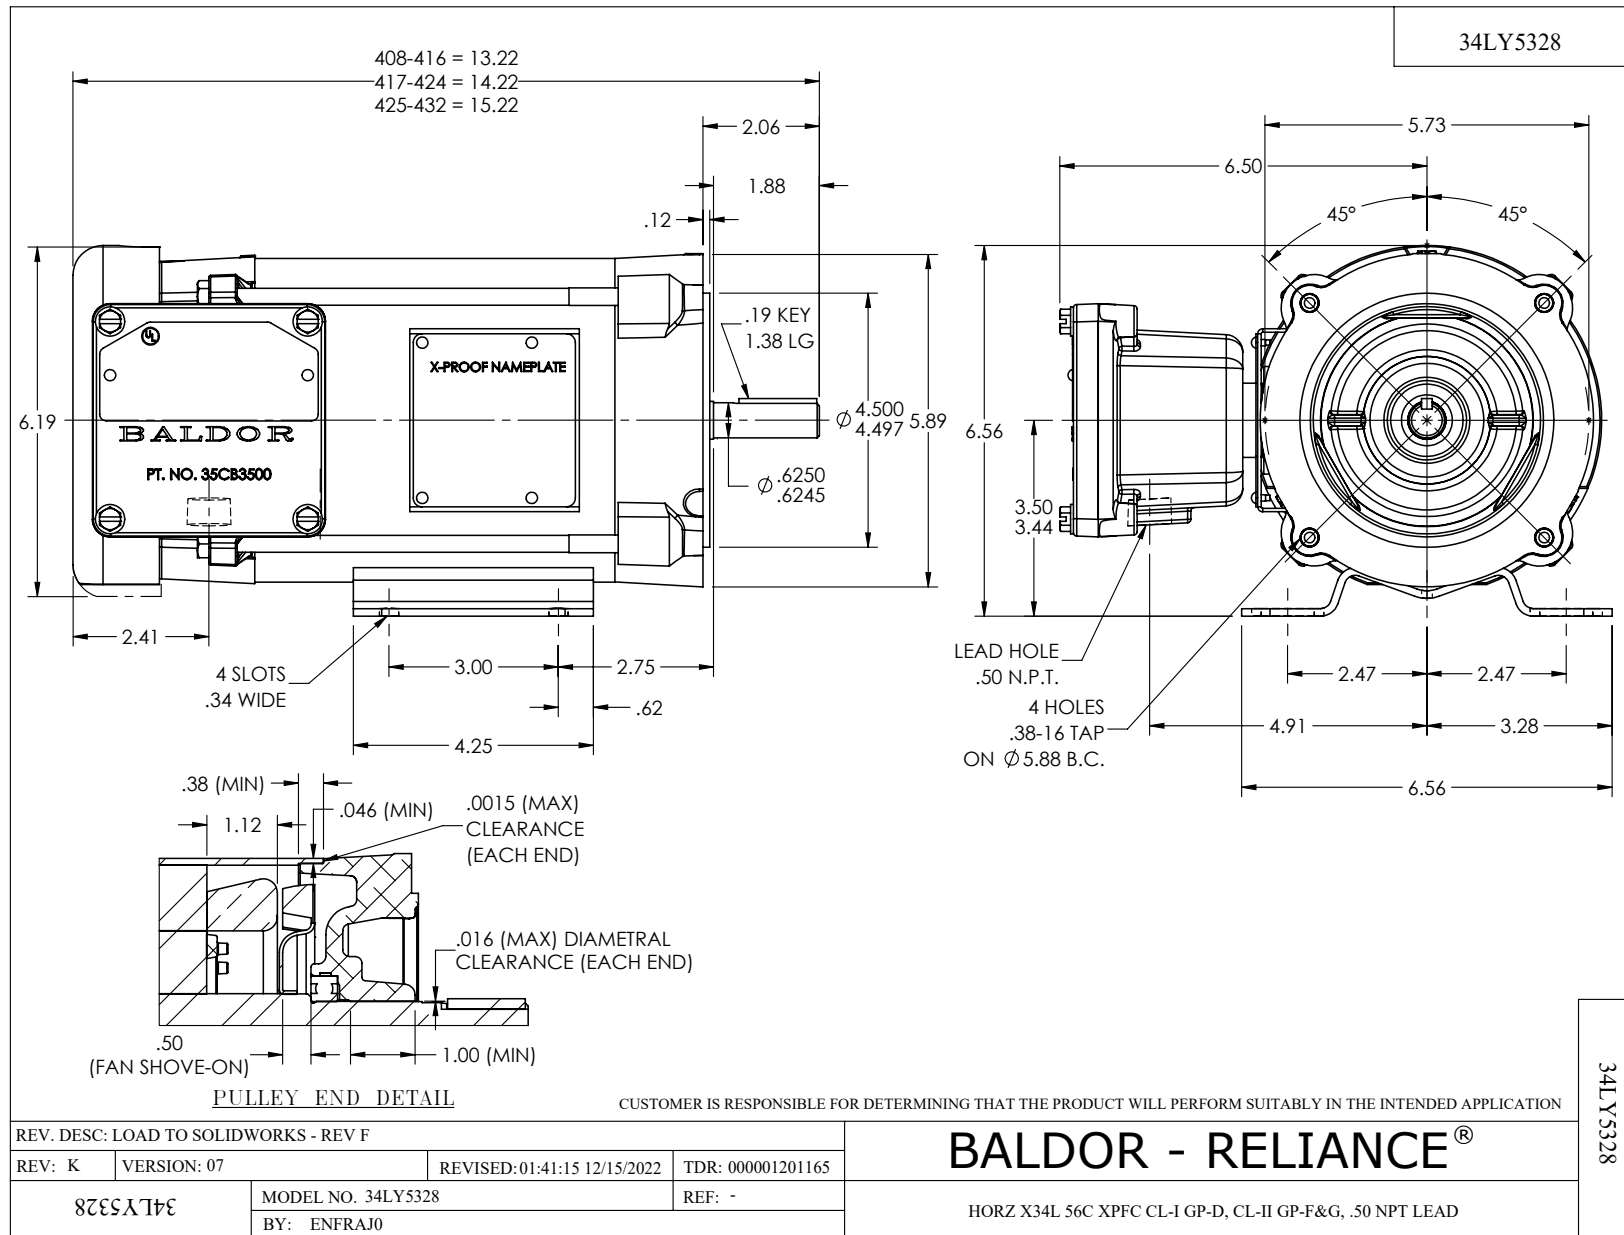


CD0565

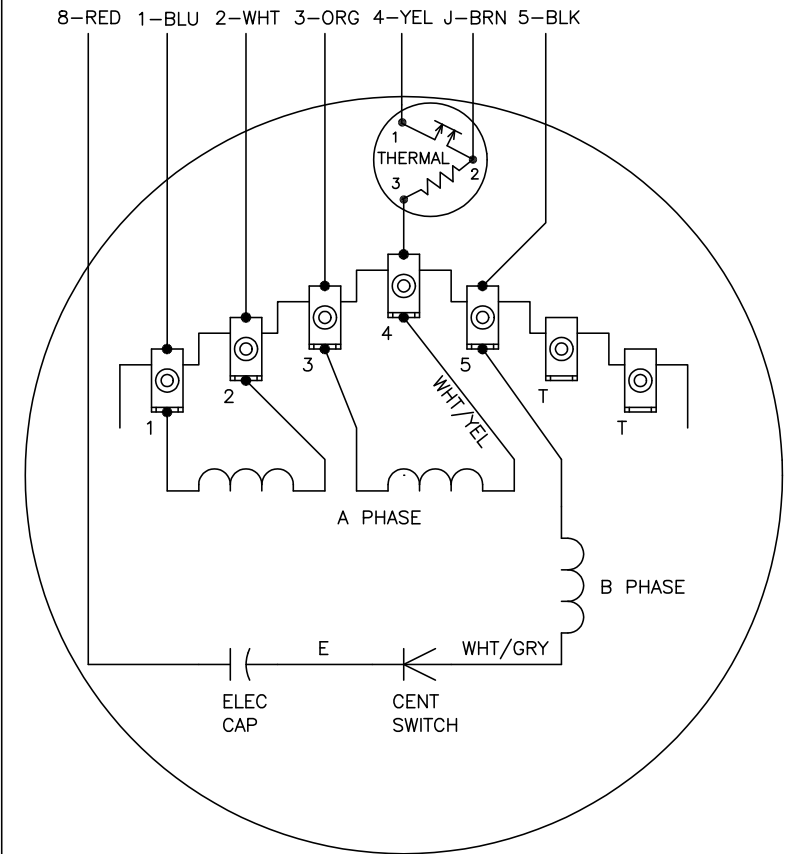

	LINE A	LINE B	JOIN	JOIN
HIGH STD	1	4	2,3,8	J,5
HIGH OPP	1	4	2,3,5	J,8
LOW STD	1,3,8	4	—	2,J,5
LOW OPP	1,3,5	4	—	2,J,8

- NOTES:
1. STANDARD ROTATION IS CCW FACING END OPPOSITE SHAFT EXTENSION.
 2. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
 3. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CONNECTIONS FOR TWO-TERMINAL THERMAL



REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: C	BY: JLP	REVISED: 04/08/99 3:25	TDR: 0178636
S99000		FILE: AAA00014311	MDL: —
		MTL: —	

BALDOR ELECTRIC Co.

TYPE L, DV, REV, THERMAL, 7 LD, 34XP

CD0565