



Customer information packet

D1153

.75HP, 1750RPM, DC, 56, 3428D, TEFC, F1

Class - None

Division -

Specifications

Armature Voltage	115 V
Base Speed	1750 rpm
Enclosure	TEFC
Frame	56
Frame Material	Steel
Haz Area Class and Group	None
Output Power	0.750 HP
Agency Approvals	CSA UR
Ambient Temperature	40 °C
Armature Current	6.6 a
Armature Inertia	6.552 lb-ft ²
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Drip Cover	No Drip Cover
Duty Rating	CONT
Feedback Device	NO FEEDBACK
Field Winding Type	COMPOUND
Heater Indicator	No Heater
Insulation Class	F
Lifting Lugs	No Lifting Lugs
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	2 @ 14 AWG 2 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Mounting Arrangement	F1
Overall Length	14.04 IN
Product Family	WP Below Decks Marine Duty
Pulley End Bearing Type	Sealed Bearing
RoHS Status	ROHS COMPLIANT
Service Factor	1.00

Part detail

Revision	X
Type	DC
Mech. spec.	34-6121
Base	
Status	PRD/A
Elec. spec.	34WG3117
Layout	34LY6121
Eff. date	10-25-2024
CD Diagram	CD0862B01
Poles	00
Leads	
Proprietary	False
Created date	01-01-0001

Shaft Diameter	0.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger

Nameplate

NP2801L			
CAT.NO.	D1153		
SPEC.	34-6121-3117		
HP	.75	ENCL	TEFC
RPM	1750		
FRAME	56	TYPE	3428D
ARM V	115	ARM A	6.6
FLD V		FLD A	
INSUL	F	AMB.	40
DUTY	CONT	SUPPLY	A
BRG/DE	6203	BRG/ODE	6203
BRUSHES	2/BP5000H03		
	IEEE 45	BLANK	
SER.			
BLANK	--		
APRV-CSA	APRV-UL		

DC Motor Performance Data

Record # 235

Typical performance - not guaranteed values

Winding: 34WG3117-R001		Type: 3428D	Enclosure: TEFC
Nameplate Data		General Characteristics	
Rated Output (HP)	0.75	Armature Resistance @ 25°C	1.299 Ω
R.P.M.	1750		
Armature Volts	115	Series Winding Resistance @ 25°C	0.3834 Ω
Armature Amps	6.6	Shunt Winding Resistance @ 25°C	194.54 Ω
Field Volts		Armature Inductance	14.5 mH
Field Amps			
Rating - Duty	40C AMB-CONT		
Power Supply Code	K		

Load Characteristics at 125 Armature Volts, 125 Field Volts, 0.64 Field Amps

Load Point	1	2	3	4	5	6	7
Armature Amps	0.62	1.98	3.29	4.66	5.99	7.34	8.69
R.P.M.	2144	2098	2026	1960	1894	1842	1782
Torque (LB-FT)	0	0.56	1.13	1.69	2.25	2.81	3.38


ABB Motors and Mechanical Inc.


WINDING # 34WG3117

Typical performance - not guaranteed values.

0.75 HP DC 1750 RPM 115 V 3428D


ENCL: TEFC DUTY: CONT CL: F

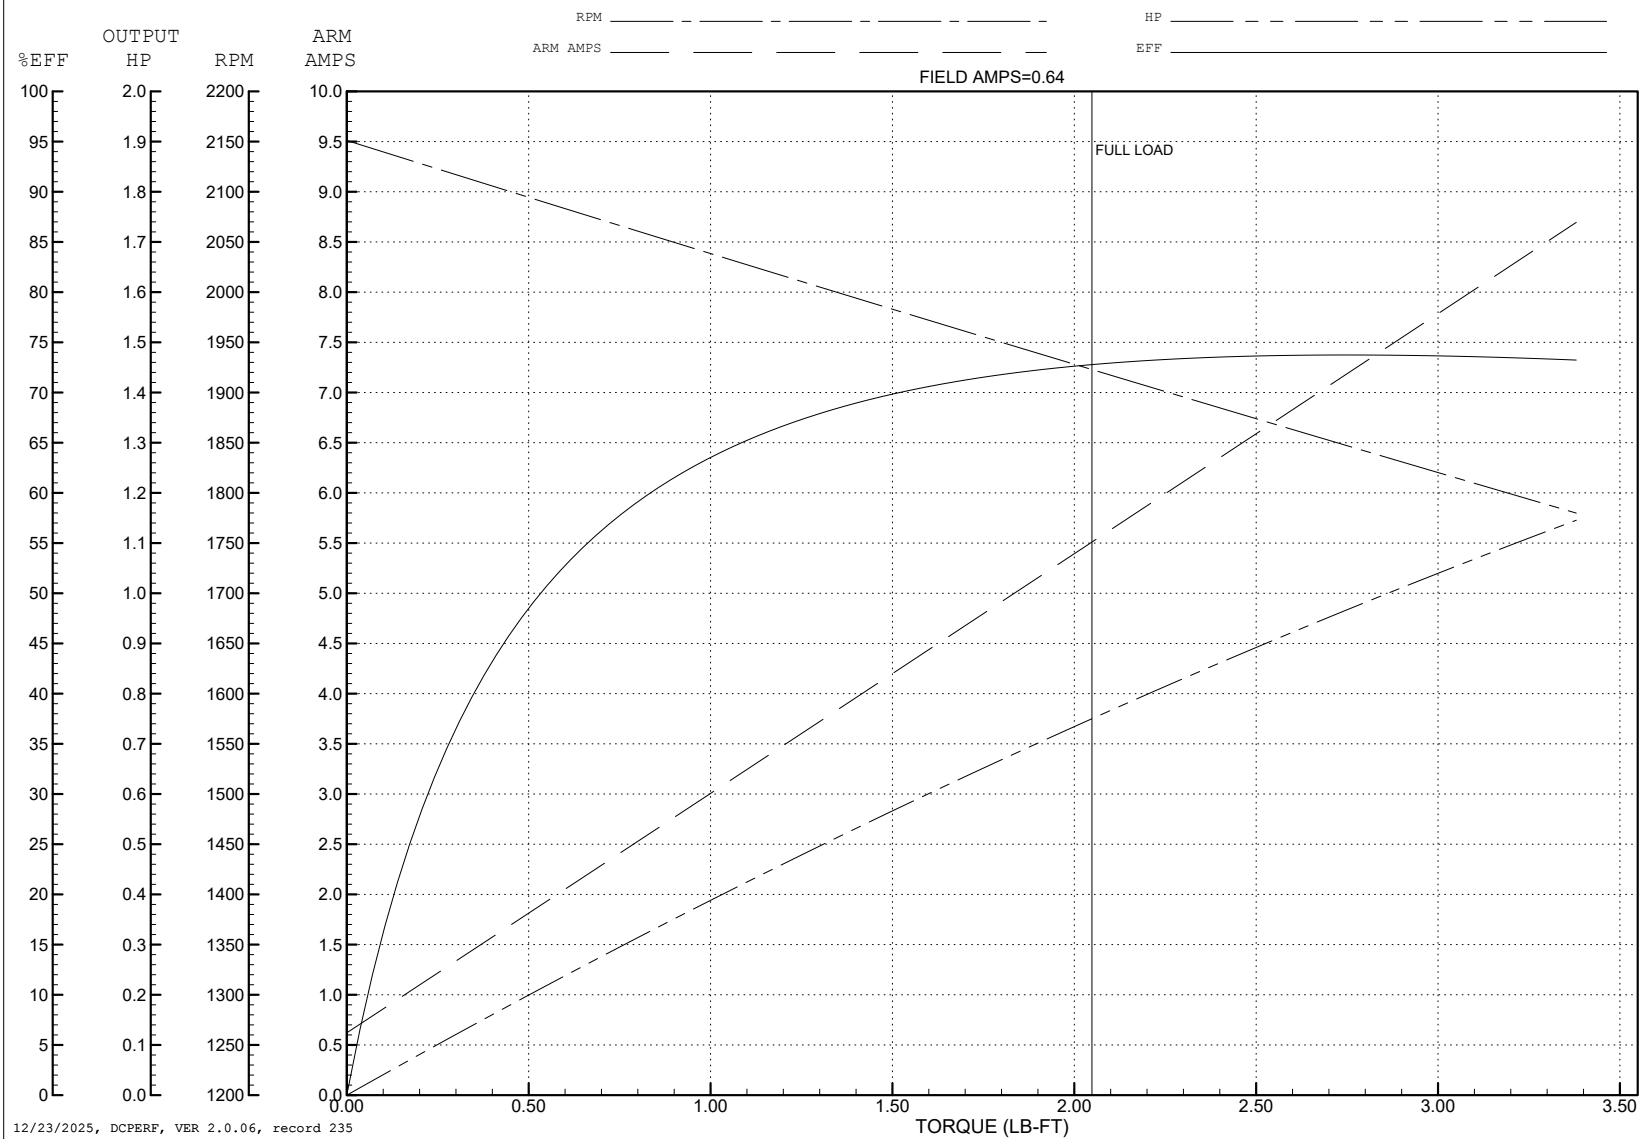

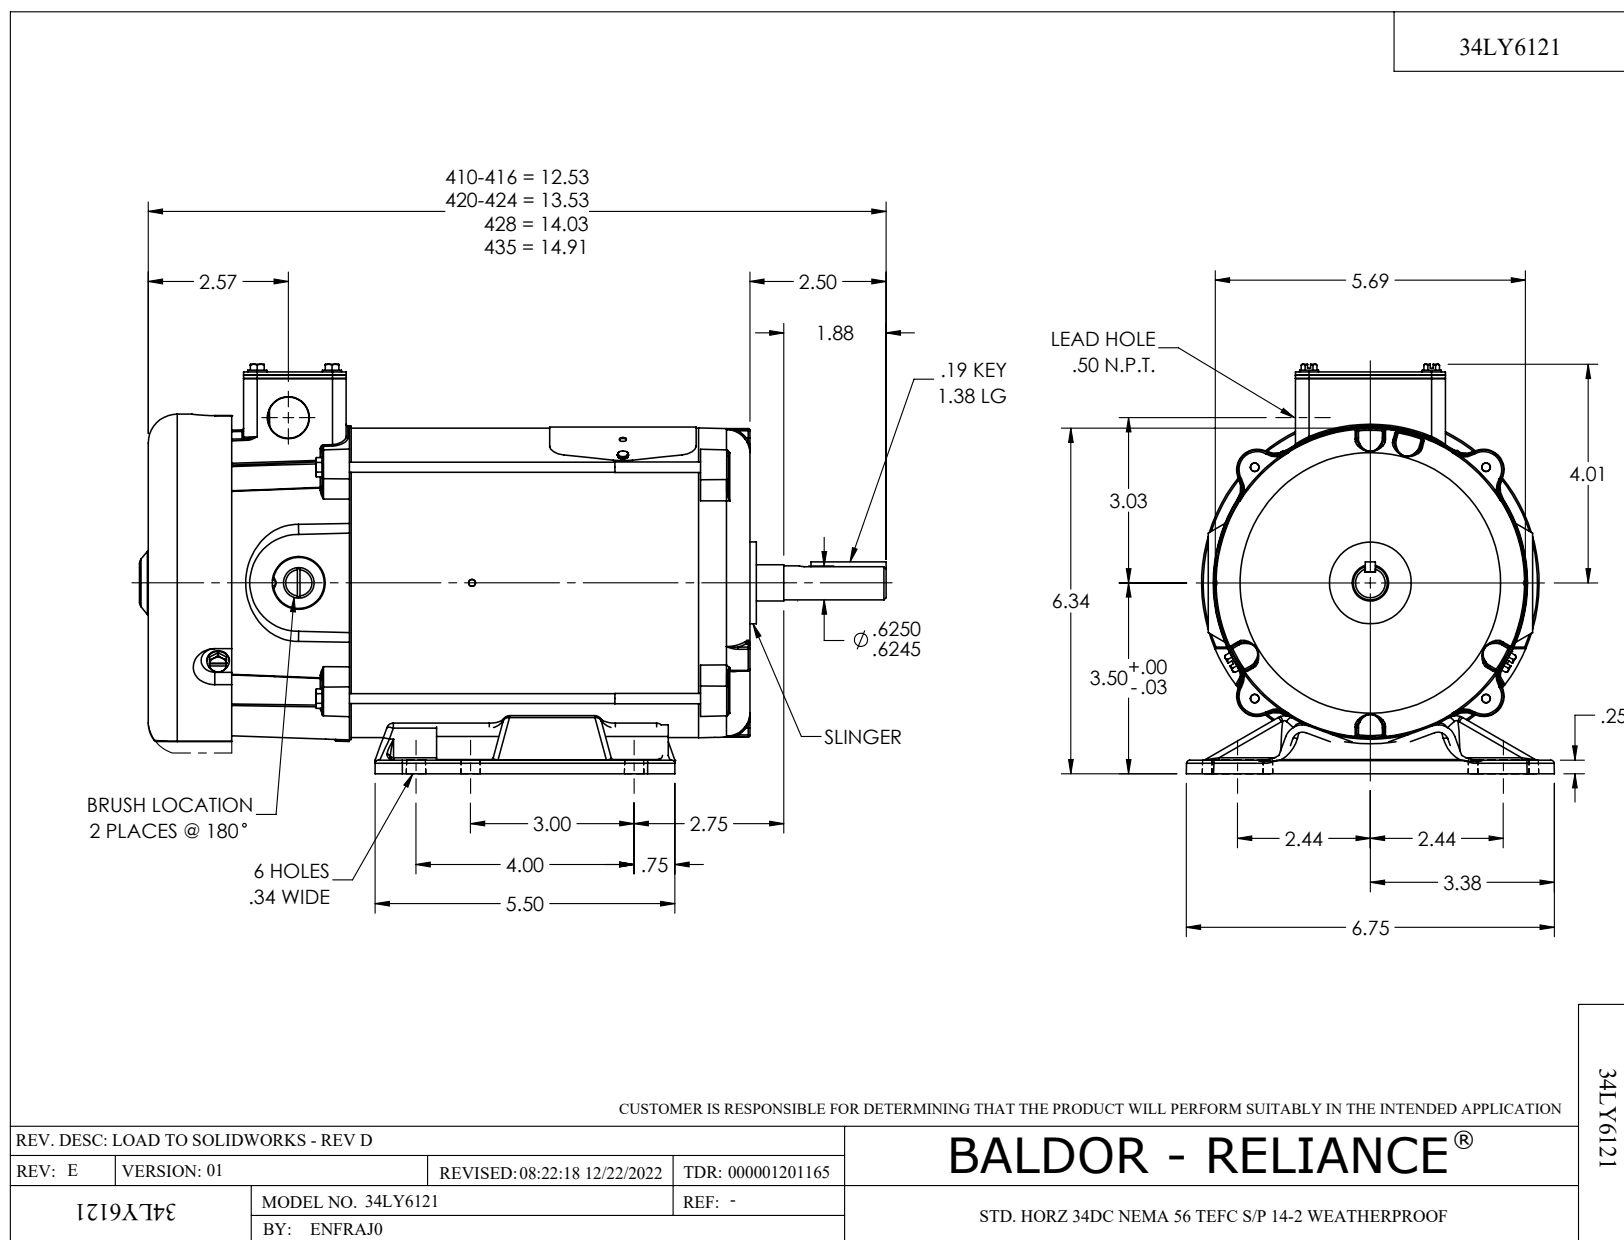

CD0862B01

COMPOUND WOUND

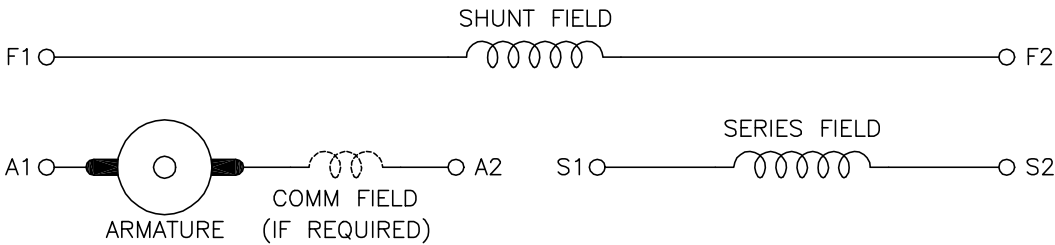

DIRECTION OF ROTATION			
CWDE		CCWDE	
POS TERM (+)	NEG TERM (-)	POS TERM (+)	NEG TERM (-)
A1	S2	A2	S2
F1	F2	F1	F2
CONNECT A2 & S1		CONNECT A1 & S1	

NOTES:

1. LIMIT STARTING INRUSH CURRENT TO NOT MORE THAN 3 TIMES RATED AMPERES BY ENERGIZING THE FULL SHUNT FIELD BEFORE BRINGING THE ARMATURE VOLTAGE UP SLOWLY OR IN STEPS.
2. OPTIONAL FIELD REOSTAT MAY BE CONNECTED IN SERIES WITH THE SHUNT FIELD.
3. OPTIONAL THERMOSTAT LEADS ARE MARKED J,J.

REV. DESC: NEW, REPLACE CD0862

REV. LTR: -

BY: JLP

REVISED: 16:10:51 11/03/2004

TDR: 347796

CD0862B01

FILE: AAA00121482

MTL: -

REF: CD0862B01

BALDOR ELECTRIC Co.

DC CONNECTION DIAGRAM, COMPOUND FIELD, 6 LEAD

CD0862B01