



Customer information packet

D2005P

5HP, 1750RPM, 240V, DKPG, L186AT

Specifications

Armature Voltage	240 V
Base Speed	1750 rpm
Enclosure	DPFG
Field Voltage	150 V
	300 V
Output Power	5.000 HP
Agency Approvals	CSA
Ambient Temperature	40 °C
Armature Current	17.7 a
Drip Cover	No Drip Cover
Duty Rating	CONT
Feedback Device	NO FEEDBACK
Field Winding Type	STR. SHUNT
Heater Indicator	No Heater
Insulation Class	F
Lifting Lugs	Standard Lifting Lugs
Motor Standards	NEMA
Mounting Arrangement	F3
Overall Length	20.87 IN
Service Factor	1.00
Shaft Diameter	1.125 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Slinger Indicator	No Slinger
Thermal Device - Bearing	None

Part detail

Revision	-
Type	DC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	K0007A A
Layout	875
Eff. date	12-27-2019
CD Diagram	15209
Poles	00
Leads	
Proprietary	False
Created date	12-26-2019

Nameplate

NP1734										
CAT.NO.	D2005P			MODEL	T18S8005					
HP	5	RPM	1750/2300		FRAME	L 0186AT				
ARM V	240		ARM A	17.70	WOUND	STR. SHUNT				
FLD V	150/300	FLD A	.74-.36/.37-.18							
CONN			OHMS	555.		CL	F			
ENCL	DPFG	DUTY	CONT		MX AMB	40				
P CODE	D	CTSR			SER.F.	1.0				
S/N				E/S	K0007A A					
	-									
O.D.E. BRG.	6205	D.E. BRG.	6206	BRUSH	18044-4				QTY	2


Accessories


Part number	Description	Multiplier
90EP5000A02	C-FACE CONVERSION KIT FOR STOCK MTR,FR 1	


CUSTOMER NAME		MODEL NO.			MTG.		REMARKS:	
CUSTOMER P.O.		FRAME	R.P.M.	VOLTS	PHASE		INSUL	
CERTIFIED BY		H.P.	TYPE	ENCL	FREQ.		AMB.	
DATE					UNITS: INCH	SCALE: NONE	PROPORTION: NONE	
					PART NUMBER	875	DWG. SIZE A	


1/2-13UNC-2B THD X .75 DEEP
4-HOLES EQ. SPACED AT 90°
ON A 7.250 DIA. B.C.

3/8-16UNC-2B THD
X .88 DEEP IN SHAFT
END.



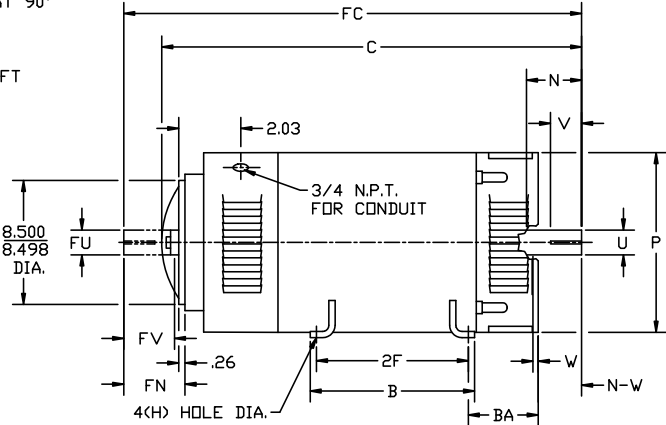

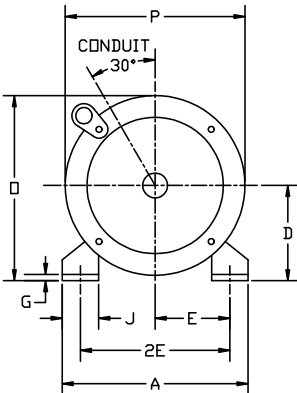



ACCESSORY MTG. FACE

STANDARD COMM END
FOR SINGLE SHAFT EXTENSION

FRAME	FOOT MOUNTING					D.E. SHAFT EXTENSION					DRIVE KEY		ACC SHAFT EXTENSION			ACC KEY		FRAME					ARM APPROX. WK ² LBS.FT. ²	APPROXIMATE WEIGHT			
	BA	E	2F	G	H	J	N	N-W	U	V	W	KEY-SQ.	KEY-LONG	FN	FU	FV	KEY-SQ.	KEY-LONG	A	B	C	FC			D	O	P
L182AT	2.75	3.75	4.50	.38	.406	1.50	2.90	2.77	1.125	2.50 ³	.13	.250	1.38	2.28	.875	2.03	.188	1.38	8.81	5.75	15.81	17.37	4.50 ²	8.94	8.88	.28	84 ⁵
L186AT	2.75	3.75	7.00	.38	.406	1.50	2.90	2.77	1.125	2.50 ³	.13	.250	1.38	2.28	.875	2.03	.188	1.38	8.81	8.25	19.31	20.87	4.50 ²	8.94	8.88	.67	159 ⁵
1810AT	2.75	3.75	11.00	.38	.406	1.50	2.90	2.77	1.125	2.50 ³	.13	.250	1.38	2.28	.875	2.03	.188	1.38	8.81	12.25	22.21	23.78	4.50 ²	9.00	9.00	1.0	195 ⁵

1) SHAFT DIAMETERS TO 1.500 TOLERANCE +.0000 - .0005
SHAFT DIAMETERS ABOVE 1.500 TOLERANCE +.0000 - .0010
SHAFT DIAMETERS TO 1.625 RUNOUT .002 T.I.R. MAX.
SHAFT DIAMETERS ABOVE 1.625 RUNOUT .003 T.I.R. MAX.

2) 'D' DIMENSION TOLERANCE +.000 - .030

3) 'V' DIMENSION IS MAX. HUB LENGTH ON SHAFT

4) CONDUIT BOX CAN BE ROTATED IN 90° STEPS ON ITS OWN AXIS.

5) TOTAL WEIGHT OF MOTOR.

6) ALL DIMENSIONS NOT NOTED ARE NOMINAL DIMENSIONS CONSULT FACTORY FOR TOLERANCES.

FOR F1 OR F2 CONDUIT BOX
LOCATION SEE SALES ORDER

DESIGNER
CSL
7-19-91

ENGINEER
RFL
7-19-91

ENGINEER
DAG
7-19-91

MANUF.
RWT
7-19-91

BALDOR

TITLE: DIMENSION SHEET
DPFG, STD AT

A 19032 REDRAWN

REV. ECO. DESCRIPTION BY DATE

CSL 7-19-1991

BY DATE


PART NUMBER
875

DWG. SIZE
A

REV.
A

15209

ALUMINUM (MATT) BACKGROUND WITH BLACK LETTERS

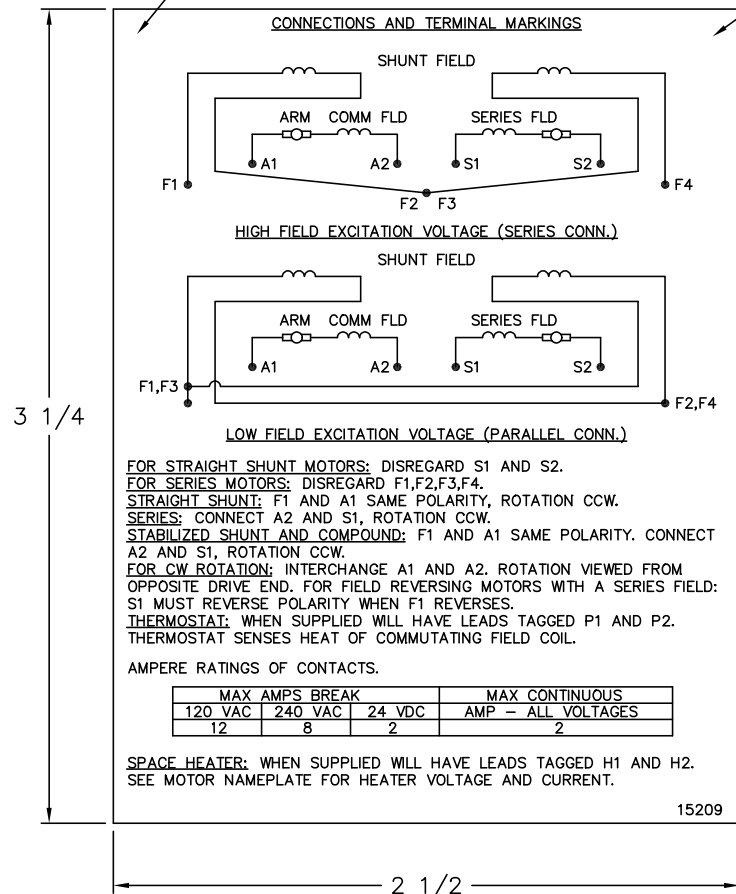LABEL MANUFACTURER
IDENTIFYING MARK TO
APPEAR HERE**NOTE:**MATERIAL .005 MINIMUM FULL HARD
ALUMINUM DULL FINISH.TEMP. RANGE -20°C TO +125°C
MAXIMUM.FOR INDOOR AND OUTDOOR MOUNTING
BACK.METAL, PRESSURE SENSITIVE BACK.
MUST MEET CSA STANDARD.THE CSA IDENTIFYING MARK OF THE
LABEL MANUFACTURER MUST APPEAR
IN THE UPPER RIGHT HAND CORNER AS
INDICATED.UNLESS OTHERWISE SPECIFIED,
BREAK ALL SHARP EDGES .010/.020.
REMOVE ALL BURRS.

TOLERANCES

.X ±.015	FRACTIONS ±1/32
.XX ±.010	RADI ±1/16
.XXX ±.005	ANGLES ±1°

MATL: NOTED

REV: G CHANGE ALL "NAMEPLATE" TEXT TO "LABEL"

60Z91

SCALE: —

BY: BKW

REVISED: 02/19/97

FILE: CHB00002485

TDR: 0115147

BALDOR ELECTRIC Co.

LABEL, CONNECTIONS AND TERMINAL MARKINGS DC

15209