



Customer information packet

D2025P

0288AT, 25HP, 1750RPM, 240, 300, DPFG, F1

Specifications

Armature Voltage	240 V
Base Speed	1750 rpm
Enclosure	DPFG
Field Voltage	300 V
Frame	288AT
Output Power	25.000 HP
Agency Approvals	CSA
Ambient Temperature	40 °C
Armature Current	89.2 a
Drip Cover	No Drip Cover
Duty Rating	CONT
Feedback Device	NO FEEDBACK
Field Winding Type	STR. SHUNT
Heater Indicator	No Heater
Insulation Class	F
Lifting Lugs	Standard Lifting Lugs
Motor Standards	NEMA
Mounting Arrangement	F1
Overall Length	32.75 IN
Service Factor	1.00
Shaft Diameter	1.875 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Slinger Indicator	No Slinger
Thermal Device - Bearing	None

Part detail


Revision	-
Type	DC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	K0065A A
Layout	876-2
Eff. date	12-26-2019
CD Diagram	15209
Poles	00
Leads	
Proprietary	False
Created date	12-20-2019

Nameplate


NP1734										
CAT.NO.	D2025P		MODEL		T28S8001					
HP	25	RPM	1750/2300		FRAME		0288AT			
ARM V	240		ARM A		89.20	WOUND		STR. SHUNT		
FLD V	150/300	FLD A		2.98-1.94/1.49-.97						
CONN			OHMS		129.3		CL		F	
ENCL	DPFG	DUTY		CONT		MX AMB		40		
P CODE	D	CTSR				SER.F.		1.0		
S/N			E/S		K0065A A					
	-									
O.D.E. BRG.	6209	D.E. BRG.		6210	BRUSH		28610-1		QTY	4

Accessories

Part number	Description	Multiplier
93EP5000A02	C-FACE CONVERSION KIT FOR STOCK MTR,FR 2	

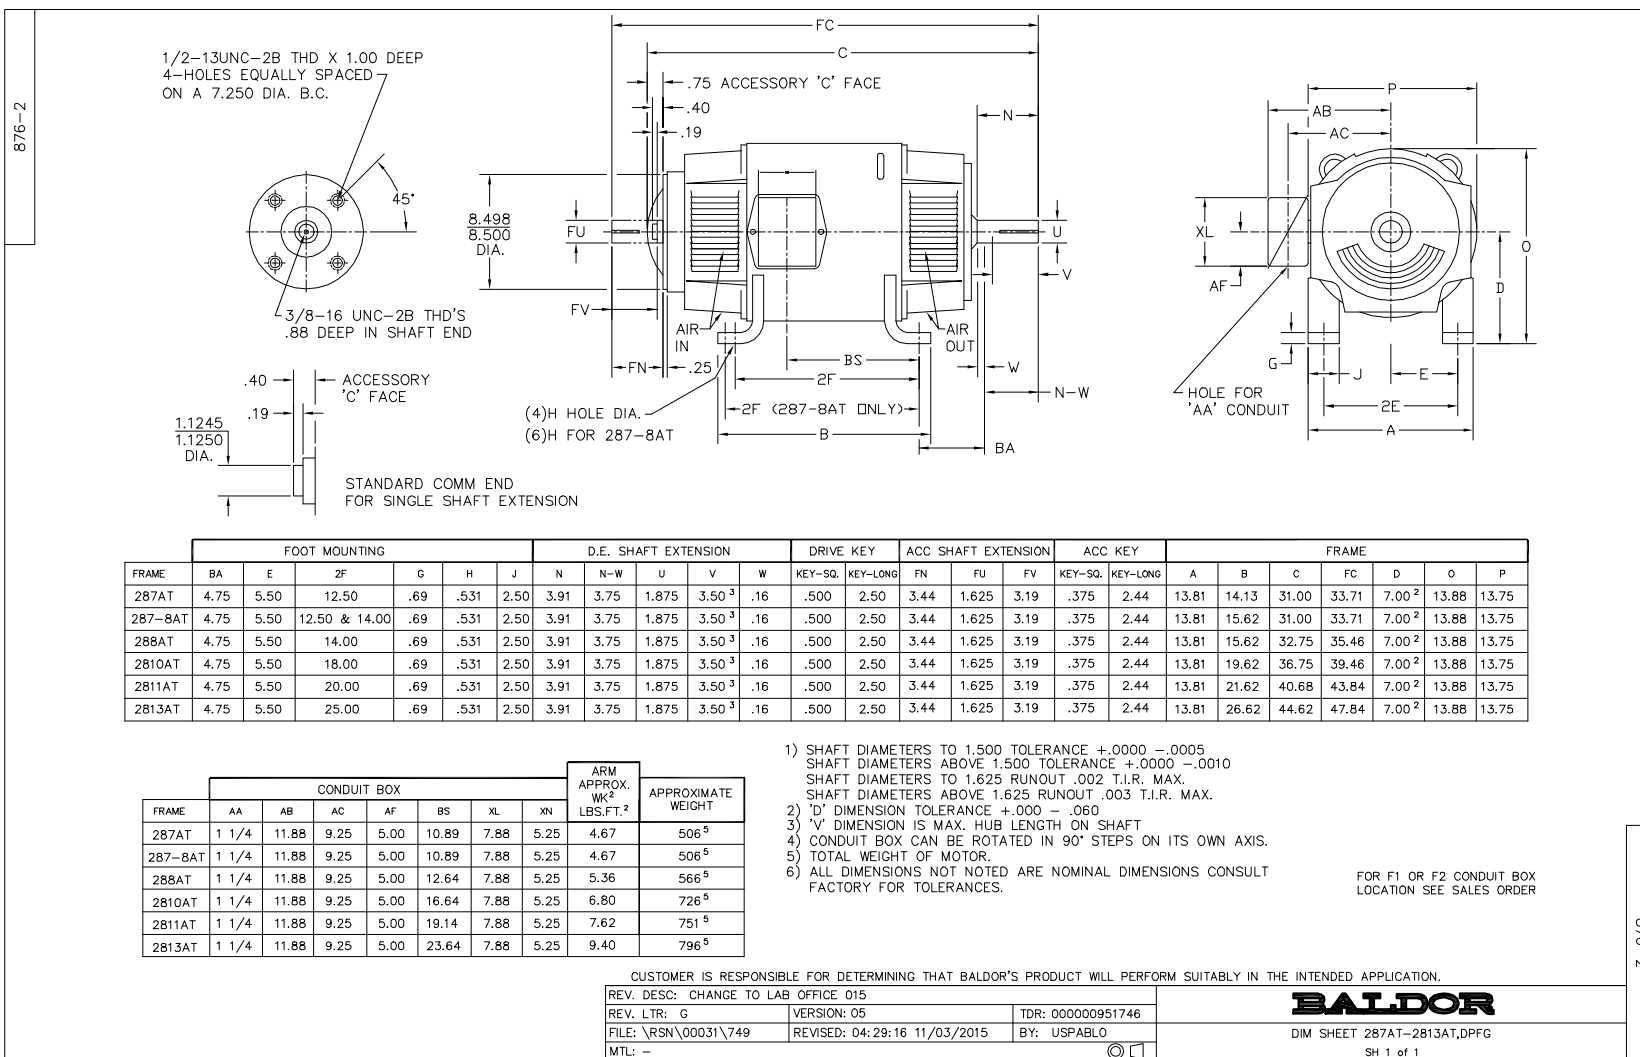

15209

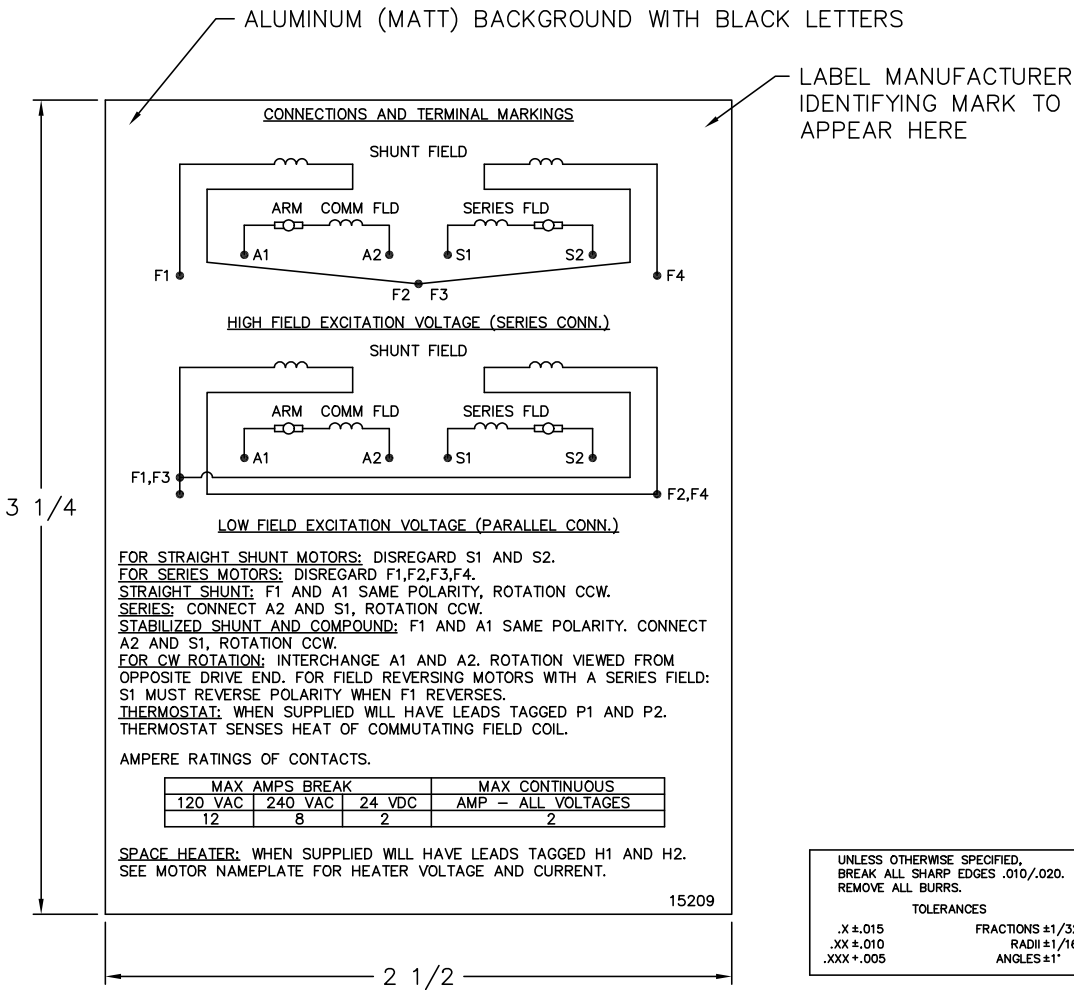

NOTE:
MATERIAL .005 MINIMUM FULL HARD
ALUMINUM DULL FINISH.
TEMP. RANGE -20°C TO +125°C
MAXIMUM.
FOR INDOOR AND OUTDOOR MOUNTING
BACK.
METAL, PRESSURE SENSITIVE BACK.
MUST MEET CSA STANDARD.
THE CSA IDENTIFYING MARK OF THE
LABEL MANUFACTURER MUST APPEAR
IN THE UPPER RIGHT HAND CORNER AS
INDICATED.

15209

MATL: NOTED			
REV:	G	CHANGE ALL "NAMEPLATE" TEXT TO "LABEL"	
60Z91		SCALE: -	BY: BKW
		REVISED: 02/19/97	
		FILE: CHB00002485	TDR: 0115147

BALDOR ELECTRIC Co.

LABEL, CONNECTIONS AND TERMINAL MARKINGS DC