



Customer information packet

D2520P

0328AT, 20HP, 1750RPM, 240, 300, TEFC, F1

Specifications

Armature Voltage	240 V
Base Speed	1750 rpm
Enclosure	TEFC
Field Voltage	300 V
Frame	328AT
Output Power	20.000 HP
Agency Approvals	CSA
Ambient Temperature	40 °C
Armature Current	68.8 a
Drip Cover	No Drip Cover
Duty Rating	CONT
Feedback Device	NO FEEDBACK
Field Winding Type	STR. SHUNT
Heater Indicator	No Heater
Insulation Class	F
Lifting Lugs	Standard Lifting Lugs
Motor Standards	NEMA
Mounting Arrangement	F1
Overall Length	42.45 IN
Service Factor	1.00
Shaft Diameter	2.125 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Slinger Indicator	No Slinger
Thermal Device - Bearing	None

Part detail


Revision	A
Type	DC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	K0081A A
Layout	885-4
Eff. date	10-03-2023
CD Diagram	15209
Poles	00
Leads	
Proprietary	False
Created date	12-18-2019

Nameplate


NP1734									
CAT.NO.	D2520P			MODEL	T32S8007				
HP	20	RPM	1750/2300		FRAME	0328AT			
ARM V	240		ARM A	68.80	WOUND	STR. SHUNT			
FLD V	150/300		FLD A	2.22-1.20/1.11-.60					
CONN			OHMS	170.5		CL	F		
ENCL	TEFC		DUTY	CONT		MX AMB	40		
P CODE	D		CTSR			SER.F.	1.0		
S/N				E/S	K0081A A				
	-								
O.D.E. BRG.	6210	D.E. BRG.	6211	BRUSH		28610-1		QTY	2

Accessories

Part number	Description	Multiplier
94EP5000A01	C-FACE CONVERSION KIT STOCK MTR,FR 320	

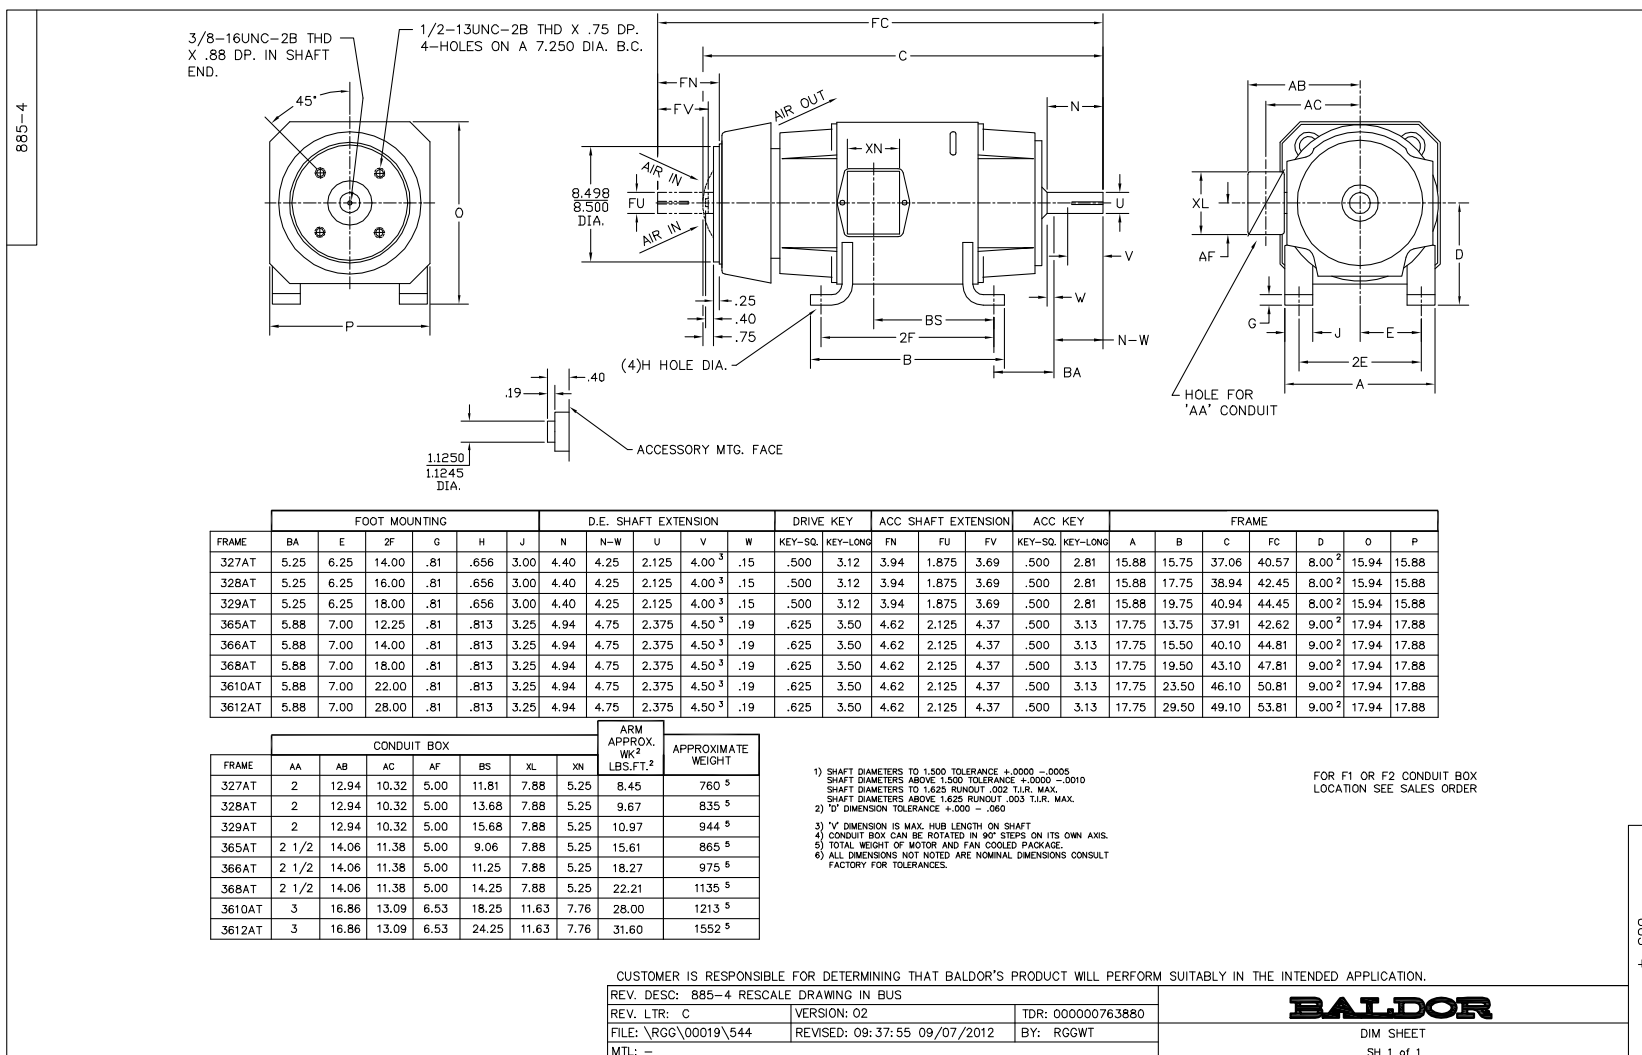

15209

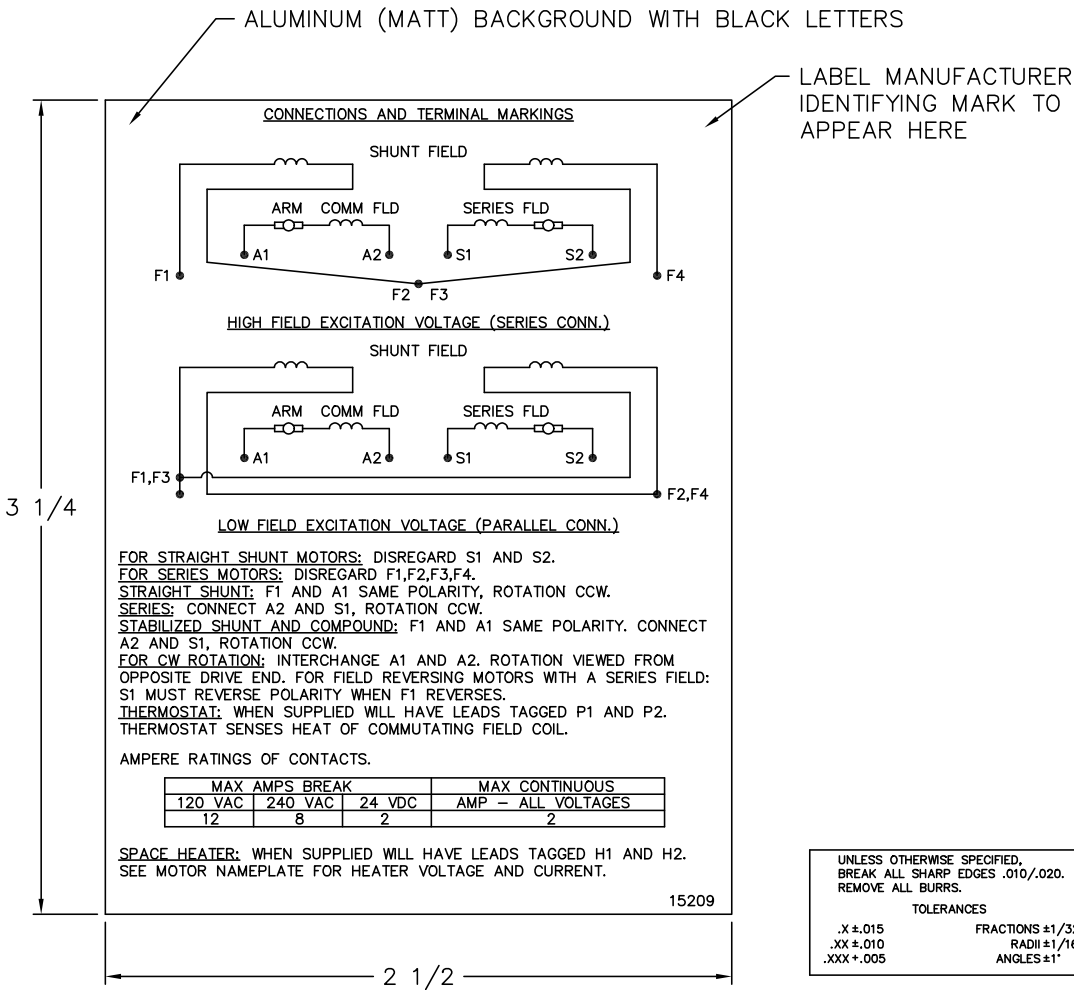

NOTE:
MATERIAL .005 MINIMUM FULL HARD
ALUMINUM DULL FINISH.
TEMP. RANGE -20°C TO +125°C
MAXIMUM.
FOR INDOOR AND OUTDOOR MOUNTING
BACK.
METAL, PRESSURE SENSITIVE BACK.
MUST MEET CSA STANDARD.
THE CSA IDENTIFYING MARK OF THE
LABEL MANUFACTURER MUST APPEAR
IN THE UPPER RIGHT HAND CORNER AS
INDICATED.

15209

MATL: NOTED			
REV:	G	CHANGE ALL "NAMEPLATE" TEXT TO "LABEL"	
60Z91		SCALE: -	BY: BKW
		REVISED: 02/19/97	
		FILE: CHB00002485	TDR: 0115147

BALDOR ELECTRIC Co.

LABEL, CONNECTIONS AND TERMINAL MARKINGS DC