



Customer information packet

D5050P-BV

0328AT, 50HP, 1750RPM, 500, 300, DPBV, F1

Specifications

Armature Voltage	500 V
Base Speed	1750 rpm
Enclosure	DPFG
Field Voltage	300 V
Frame	328AT
Output Power	50.000 HP
Agency Approvals	CSA
Ambient Temperature	40 °C
Armature Current	83.7 a
Drip Cover	No Drip Cover
Duty Rating	CONT
Feedback Device	NO FEEDBACK
Field Winding Type	STR. SHUNT
Heater Indicator	No Heater
Insulation Class	F
Lifting Lugs	Standard Lifting Lugs
Motor Standards	NEMA
Mounting Arrangement	F1
Overall Length	35.38 IN
Service Factor	1.00
Shaft Diameter	2.125 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Slinger Indicator	No Slinger
Thermal Device - Bearing	None

Part detail

Revision	A
Type	DC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	K0078A B
Layout	877-1
Eff. date	10-03-2023
CD Diagram	15209
Poles	00
Leads	
Proprietary	False
Created date	12-03-2019

Nameplate

NP1734										
CAT.NO.	D5050P-BV			MODEL	T32S8006					
HP	50	RPM	1750/2100		FRAME	0328AT				
ARM V	500		ARM A	83.70	WOUND	STR. SHUNT				
FLD V	300/150	FLD A	2.00-1.41							
CONN			OHMS	96.2		CL	F			
ENCL	DPFG	DUTY	CONT		MX AMB	40				
P CODE	D	CTSR			SER.F.	1.0				
S/N				E/S	K0078A B					
	FLD DATA FOR 300V									
	FIELD VOLTS 150/300									
O.D.E. BRG.	6210	D.E. BRG.	6211	BRUSH	28610-2				QTY	4

Accessories

Part number	Description	Multiplier
D5050P-BV	0328AT,50HP,1750RPM,500,300,DPBV,F1	N2

877-1



1/2-13UNC-2B THD X 1.00 DEEP
4-HOLES EQUALLY SPACED
ON A 7.250 DIA. B.C.



3/8-16 UNC-2B THD'S
.88 DEEP IN SHAFT END

.40
1.1245
1.1250
DIA.

STANDARD COMM END
FOR SINGLE SHAFT EXTENSION

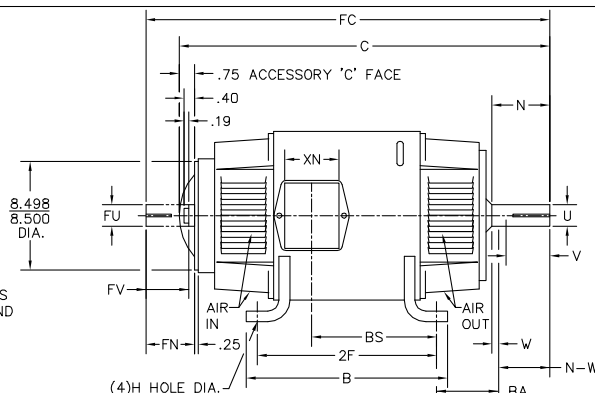

	FOOT MOUNTING						D.E. SHAFT EXTENSION					DRIVE KEY		ACC SHAFT EXTENSION			ACC KEY		FRAME							
FRAME	BA	E	2F	G	H	J	N	N-W	U	V	W	KEY-SQ.	KEY-LONG	FN	FU	FV	KEY-SQ.	KEY-LONG	A	B	C	FC	D	O	P	
327AT	5.25	6.25	14.00	.81	.656	3.00	4.40	4.25	2.125	4.00 ³	.15	.500	3.12	3.94	1.875	3.69	.500	2.81	15.88	15.75	33.50	36.71	8.00 ²	15.94	15.88	
328AT	5.25	6.25	16.00	.81	.656	3.00	4.40	4.25	2.125	4.00 ³	.15	.500	3.12	3.94	1.875	3.69	.500	2.81	15.88	17.75	35.38	38.58	8.00 ²	15.94	15.88	
329AT	5.25	6.25	18.00	.81	.656	3.00	4.40	4.25	2.125	4.00 ³	.15	.500	3.12	3.94	1.875	3.69	.500	2.81	15.88	19.75	37.38	40.58	8.00 ²	15.94	15.88	
365AT	5.88	7.00	12.25	.81	.813	3.25	4.94	4.75	2.375	4.50 ³	.19	.625	3.50	4.62	2.125	4.37	.500	3.13	17.75	13.75	33.69	37.56	9.00 ²	17.94	17.88	
366AT	5.88	7.00	14.00	.81	.813	3.25	4.94	4.75	2.375	4.50 ³	.19	.625	3.50	4.62	2.125	4.37	.500	3.13	17.75	15.50	35.88	39.75	9.00 ²	17.94	17.88	
368AT	5.88	7.00	18.00	.81	.813	3.25	4.94	4.75	2.375	4.50 ³	.19	.625	3.50	4.62	2.125	4.37	.500	3.13	17.75	19.50	38.88	42.75	9.00 ²	17.94	17.88	
3610AT	5.88	7.00	22.00	.81	.813	3.25	4.94	4.75	2.375	4.50 ³	.19	.625	3.50	4.62	2.125	4.37	.500	3.13	17.75	23.50	42.20	46.10	9.00 ²	17.94	17.88	
3612AT	5.88	7.00	28.00	.81	.813	3.25	4.94	4.75	2.375	4.50 ³	.19	.625	3.50	4.62	2.125	4.37	.500	3.13	17.75	29.50	46.31	49.10	9.00 ²	17.94	17.88	

CONDUIT BOX										ARM APPROX. WK ² LBS.FT. ²	APPROXIMATE WEIGHT
FRAME	AA	AB	AC	AF	BS	XL	XN				
327AT	2	12.94	10.32	5.00	11.81	7.88	5.25	8.45		700 ⁵	
328AT	2	12.94	10.32	5.00	13.68	7.88	5.25	9.67		775 ⁵	
329AT	2	12.94	10.32	5.00	15.68	7.88	5.25	10.97		884 ⁵	
365AT	2 1/2	14.06	11.38	5.00	9.06	7.88	5.25	15.61		765 ⁵	
366AT	2 1/2	14.06	11.38	5.00	11.25	7.88	5.25	18.27		875 ⁵	
368AT	2 1/2	14.06	11.38	5.00	14.25	7.88	5.25	22.21		1036 ⁵	
3610AT	3	16.86	13.09	6.53	18.25	11.63	7.76	28.00		1070 ⁵	
3612AT	3	16.86	13.09	6.53	24.25	11.63	7.76	31.60		1136 ⁵	

- 1) SHAFT DIAMETERS TO 1.500 TOLERANCE +.0000 - .0005
- 2) SHAFT DIAMETERS ABOVE 1.500 TOLERANCE +.0000 - .0010
- 3) SHAFT DIAMETERS TO 1.625 RUNOUT .002 T.I.R. MAX.
- 4) SHAFT DIAMETERS ABOVE 1.625 RUNOUT .003 T.I.R. MAX.
- 5) 'V' DIMENSION IS MAX. HUB LENGTH ON SHAFT
- 6) CONDUIT BOX CAN BE ROTATED IN 90° STEPS ON ITS OWN AXIS.
- 7) TOTAL WEIGHT OF MOTOR.
- 8) ALL DIMENSIONS NOT NOTED ARE NOMINAL DIMENSIONS CONSULT FACTORY FOR TOLERANCES.

FOR F1 OR F2 CONDUIT BOX
LOCATION SEE SALES ORDER


CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.

REV. DESC: RELOAD TO BUS	VERSION: 02	TDR: 000000773327
REV. LTR: C	FILE: \RGG\00019\101	REVISD: 10:43:23 11/09/2012
MTL: -	BY: RGGWT	

BALDOR


DIM SHEET
SH 1 of 1

877-1

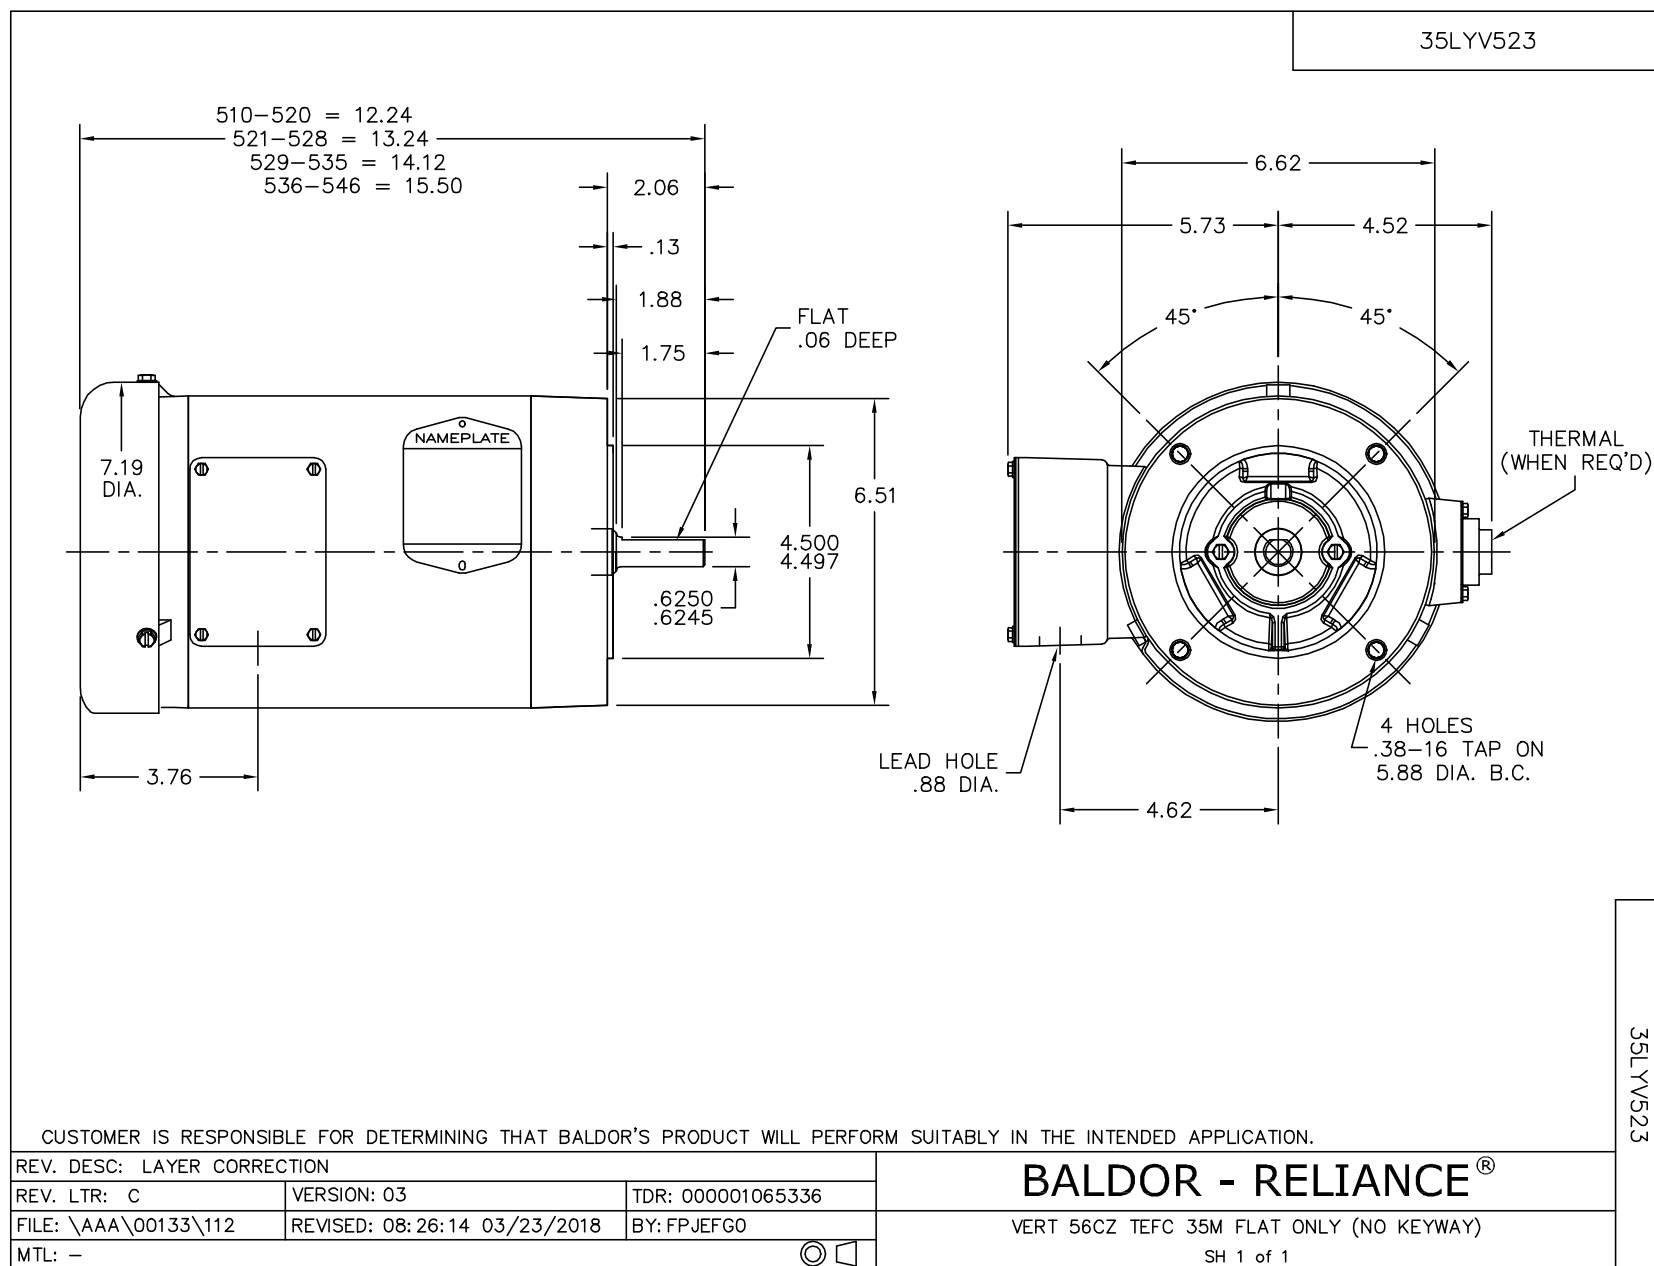

15209

ALUMINUM (MATT) BACKGROUND WITH BLACK LETTERS

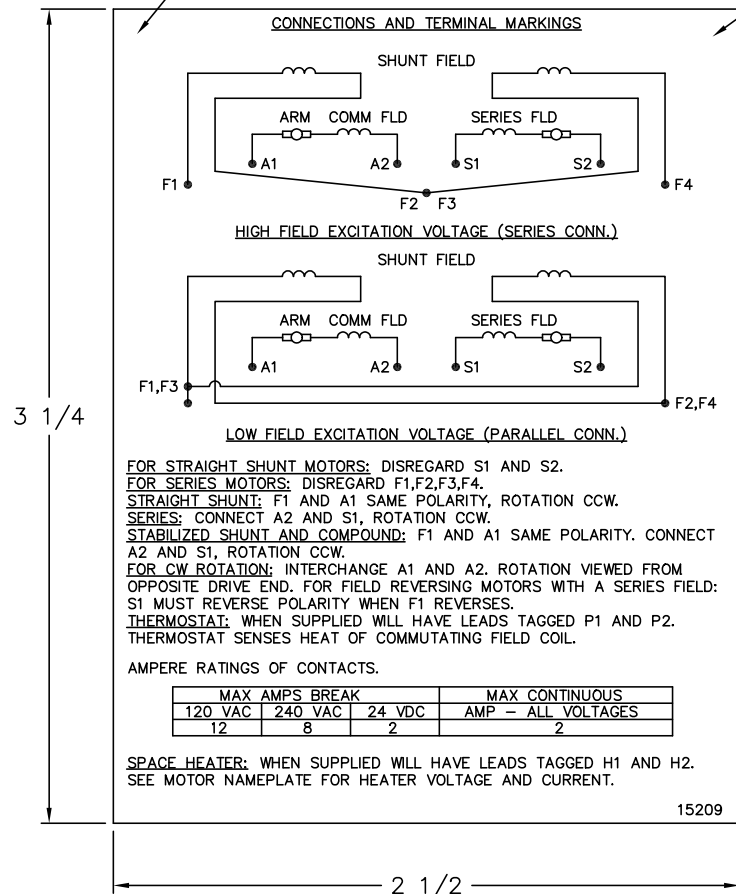LABEL MANUFACTURER
IDENTIFYING MARK TO
APPEAR HERE**NOTE:**MATERIAL .005 MINIMUM FULL HARD
ALUMINUM DULL FINISH.TEMP. RANGE -20°C TO +125°C
MAXIMUM.FOR INDOOR AND OUTDOOR MOUNTING
BACK.METAL, PRESSURE SENSITIVE BACK.
MUST MEET CSA STANDARD.THE CSA IDENTIFYING MARK OF THE
LABEL MANUFACTURER MUST APPEAR
IN THE UPPER RIGHT HAND CORNER AS
INDICATED.UNLESS OTHERWISE SPECIFIED,
BREAK ALL SHARP EDGES .010/.020.
REMOVE ALL BURRS.

TOLERANCES

.X ±.015	FRACTIONS ±1/32
.XX ±.010	RADI ±1/16
.XXX ±.005	ANGLES ±1°

MATL: NOTED

REV: G CHANGE ALL "NAMEPLATE" TEXT TO "LABEL"

60Z91

SCALE: — BY: BKW REVISED: 02/19/97

FILE: CHB00002485

TDR: 0115147

BALDOR ELECTRIC Co.

LABEL, CONNECTIONS AND TERMINAL MARKINGS DC

15209