



Customer information packet

DMG2307

0219AT, 7.5KWKW, 2500RPM, 230, 230, DPFG, F2

Specifications

Armature Voltage	230 V
Base Speed	2500 rpm
Enclosure	DPFG
Field Voltage	230 V
Output Power	7.500 KW
Agency Approvals	CSA
Ambient Temperature	40 °C
Armature Current	32.6 a
Drip Cover	No Drip Cover
Duty Rating	CONT
Feedback Device	NO FEEDBACK
Field Winding Type	COMPOUND
Heater Indicator	No Heater
Insulation Class	F
Lifting Lugs	Standard Lifting Lugs
Motor Standards	NEMA
Mounting Arrangement	F2
Overall Length	24.50 IN
Service Factor	1.00
Shaft Diameter	1.375 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Slinger Indicator	No Slinger
Thermal Device - Bearing	None

Part detail

Revision	A
Type	DC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	K0019A
Layout	1486
Eff. date	01-12-2022
CD Diagram	
Poles	00
Leads	
Proprietary	False
Created date	11-26-2019

Nameplate



15405

CAT.NO.	DMG2307	MODEL NO.	T21S8010		
KW	7.5KW	RPM	2500	FRAME	0219AT
ARM VOLTS	230	ARM AMPS	32.60	WOUND	COMPOUND
FIELD VOLTS	230	FIELD AMPS	1.73-1.15		
FIELD CONN.		OHMS	132.9	INSUL. CLASS	F
ENCL	DPFG	DUTY	CONT	MAX AMBIENT	40
SERVICE FACTOR	1.0				
S/N		E/S	K0019A		
	BRUSH:150986-21-1				
O.D.E. BRG.	6207	D.E. BRG.	6207	BRUSH	150986-21-1
				QTY	2

Accessories

Part number	Description	Multiplier
91EP5000A01	C-FACE CONVERSION KIT FOR STOCK MTR,FR 2	P1

REL S.O.	FRAME	RATING	RPM	ARM. VOLTS	ARM. AMPS
	219AT	7.50HP	2500	230	32.6
WINDING TYPE		S.F.	ENCL.	AMB °C/INSUL	DUTY
STAB. SHUNT		1.0	DPG	40/F	CONT
					230
POWER CODE	TYPE	WK ² (LB-FT ²)		HOT ARM.CIR.RES.	FLD. AMPS@25 °C
A	T	1.201		.723	1.72
					199
ARM. CIR. IND. (mh)	FIELD IND. (H)	COOLING AIR(CFM/IN H ²⁰)			TURNS PER COIL SHUNT/SERIES
6.73	63.0	-/-			2200/5
LOAD PERFORMANCE					
LOAD	AMPERES	TORQUE IN OZ.-FT.	OUTPUT IN HP	RPM	% EFFICIENCY
NO LOAD	-91	0	0	2089	0
1/4	8.2	0	0	2029	0
2/4	16	0	0	1961	0
3/4	24	0	0	1894	0
4/4	33	0	0	1830	0
0.L.	49	0	0	1706	0
RPM VS. FIELD AMPS					
FIELD AMPS		RPM N.L.	RPM F.L.	Eg N.L. @ BASE SPEED	Eg F.L. @ BASE SPEED
1.15		2089	1829	272	274
1.04		2183	2354	264	264
.932		2305	2448	250	251
.823		2489	2589	231	234
.714		2761	2800	207	212
REMARKS: TYPICAL DATA					
		DR. BY E.H. GILLOT CK. BY B. GRANT APP. BY R. ERICHER DATE 04-04-08		D-C MOTOR PERFORMANCE DATA DK0019A ISSUE DATE 04-04-08	

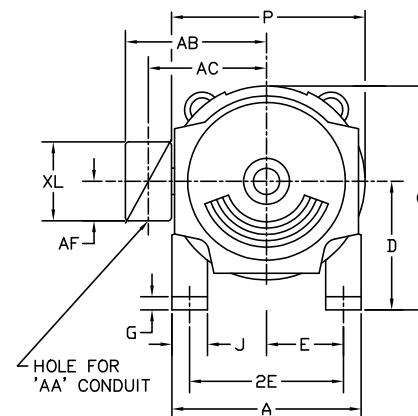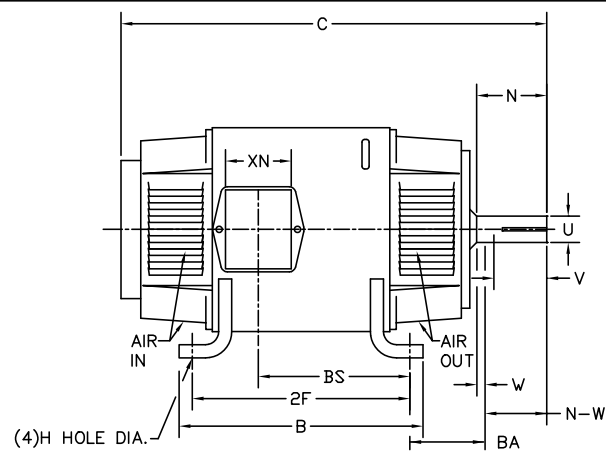

1486

FOOT MOUNTING							D.E. SHAFT EXTENSION					DRIVE KEY		FRAME					
FRAME	BA	E	2F	G	H	J	N	N-W	U	V	W	KEY-SQ.	KEY-LONG	A	B	C	D	O	P
1810AT	2.75	3.75	11.00	.38	.406	1.50	2.90	2.77	1.125 ¹	2.50 ³	.13	.250	1.38	8.75	12.25	21.46	4.50 ²	9.00	9.00
219AT	3.50	4.25	11.00	.50	.406	2.00	3.00	2.75	1.375 ¹	2.50 ³	.25	.312	1.75	10.38	12.00	24.50	5.25 ²	10.47	10.44
258AT	4.25	5.00	12.50	.69	.531	2.25	3.44	3.25	1.625 ¹	3.00 ³	.19	.375	2.31	12.38	14.00	26.50	6.25 ²	12.47	12.44
259AT	4.25	5.00	14.00	.69	.531	2.25	3.44	3.25	1.625 ¹	3.00 ³	.19	.375	2.31	12.38	15.50	28.00	6.25 ²	12.47	12.44
288AT	4.75	5.50	14.00	.69	.531	2.50	3.91	3.75	1.875 ¹	3.50 ³	.16	.500	2.50	13.81	15.62	32.00	7.00 ²	13.88	13.75
328AT	5.25	6.25	16.00	.81	.656	3.00	4.40	4.25	2.125 ¹	4.00 ³	.15	.500	3.12	15.88	17.75	34.63	8.00 ²	15.94	15.88
329AT	5.25	6.25	18.00	.81	.656	3.00	4.40	4.25	2.125 ¹	4.00 ³	.15	.500	3.12	15.88	19.75	36.63	8.00 ²	15.94	15.88

CONDUIT BOX								APPROXIMATE WEIGHT
FRAME	AA	AB	AC	AF	BS	XL	XN	
1810AT	3/4NPT	INTEGRAL WITH ENDPLATE						195
219AT	3/4-1	7.91	6.44	2.44	9.38	3.81	3.12	260
258AT	1-1/4	9.35	7.72	2.94	9.75	4.94	4.00	366
259AT	1-1/4	9.35	7.72	2.94	11.25	4.94	4.00	411
288AT	1-1/4	11.88	9.25	5.00	12.64	7.88	5.25	566
328AT	2	12.94	10.32	5.00	13.68	7.88	5.25	775
329AT	2	12.94	10.32	5.00	15.68	7.88	5.25	884

- 1) SHAFT DIAMETERS TO 1.500 TOLERANCE $+.0000 - .0005$
SHAFT DIAMETERS ABOVE 1.500 TOLERANCE $+.0000 - .0010$
SHAFT DIAMETERS TO 1.625 RUNOUT .002 T.I.R. MAX.
SHAFT DIAMETERS ABOVE 1.625 RUNOUT .003 T.I.R. MAX.
- 2) 'D' DIMENSION TOLERANCE $+.000 - .030$
- 3) 'V' DIMENSION IS MAX. HUB LENGTH ON SHAFT
- 4) CONDUIT BOX CAN BE ROTATED IN 90° STEPS ON ITS OWN AXIS.
- 5) ALL DIMENSIONS NOT NOTED ARE NOMINAL DIMENSIONS CONSULT FACTORY FOR TOLERANCES.

FOR F1 OR F2 CONDUIT BOX
LOCATION SEE SALES ORDER

1486

MATL: —			
REV:	C	CORRECTED "A" DIMENSIONS	
9871		SCALE: 0.08	BY: TBM
		FILE: CHB00003091	REVISED: 09/10/96
		TDR: 0104915	

BALDOR ELECTRIC Co.

DIM SHEET, 1810AT THRU 329AT GENERATORS

