



Customer information packet

DRX25764T

7.5HP, 1180//980RPM, 3PH, 60HZ, 254T, XPFC, F1

Class - CLI GP C,D

Division - Division I

Specifications

Enclosure	XPFC
Frame	254T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CLI GP C,D
Haz Area Division	Division I
Motor Letter Type	Three Phase
Output @ Frequency	5.000 HP @ 50 HZ 7.500 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	380.0 V @ 50 HZ 230.0 V @ 60 HZ 190.0 V @ 50 HZ 460.0 V @ 60 HZ
Agency Approvals	CSA EEV UL
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	6
Current @ Voltage	9.600 A @ 380.0 V 23.000 A @ 208.0 V 22.000 A @ 230.0 V 19.200 A @ 190.0 V 11.000 A @ 460.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT

Part detail

Revision	H
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	09WGT118
Layout	09LY-000-552
Eff. date	02-14-2024
CD Diagram	CD0005
Poles	06
Leads	9#12
Proprietary	False
Created date	05-30-2019

Efficiency @ 100% Load	91.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	9.6 a
Insulation Class	F
Inverter Code	Inverter Duty
IP Rating	NONE
KVA Code	J
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	1800 rpm
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0954M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	25.50 IN
Power Factor	70
Product Family	Hazardous Location Motor
Pulley Face Code	Standard
Rodent Screen	None
RoHS Status	ROHS NON-COMPLIANT
Service Factor	1.00
Shaft Diameter	1.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Speed	1180 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat
Vibration Sensor Indicator	No Vibration Sensor

Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1401XPSLEV											
NO.						CC	010A				
S/N						TEMP CODE		T3C			
SPEC.	09-0000-1380					INV.TYPE		PWM			
CAT.NO.	DRX25764T					C HP FR	60	C HP TO	90		
HP	7.5//5					CT HZ FROM		6	CT HZ TO		60
VOLTS	230/460//190/380					VT HZ FROM		6	VT HZ TO		60
AMPS	22/11//19.2/9.6					MAG CUR					
RPM	1180//980					MX RPM		1800			
HZ	60//50	PH	3	CL	F	NOM.EFF.		91			
SER.F.	1.00	DES	A	SL HZ	1	WK2		4.34			
FRAME	254T	RATING		40C AMB-CONT							
	55C AMB @ 1.0 SF, 60C RISE										
	1.15SF ON SINEWAVE					NEMA MG-1 PT.5,IP55					

AC Induction Motor Performance Data

Record # 57230

Typical performance - not guaranteed values

Winding: 09WGT118-R011				Type: 0954M		Enclosure: XPFC	
Nameplate Data				460 V, 60 Hz: High Voltage Connection			
Rated Output (HP)		7.5		Full Load Torque		33.3 LB-FT	
Volts		230/460		Start Configuration		direct on line	
Full Load Amps		22/11		Breakdown Torque		106 LB-FT	
R.P.M.		1180		Pull-up Torque		41.4 LB-FT	
Hz	60	Phase	3	Locked-rotor Torque		62.8 LB-FT	
NEMA Design Code		A	KVA Code	Starting Current		75.7 A	
Service Factor (S.F.)		1		No-load Current		5.97 A	
NEMA Nom. Eff.		91	Power Factor	Line-line Res. @ 25°C		0.895 Ω	
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		41°C	
				Locked-rotor Power Factor		25.8	
				Rotor inertia		4.34 LB-FT2	

Load Characteristics 460 V, 60 Hz, 7.5 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	34	53	64	70	74	75
Efficiency	81.3	88	89.6	89.7	89.4	88.3
Speed	1196	1192	1187	1183	1177	1171
Line amperes	6.46	7.57	9.19	11.2	13.3	15.9


ABB Motors and Mechanical Inc.

WINDING # 09WGT118

Typical performance - not guaranteed values.

7.5 HP 3 PH 60 HZ 1180 RPM 460 V 0954M

TORQUES (LB-FT): PO=106 PU=41.4 LR=62.8 LRA=75.7

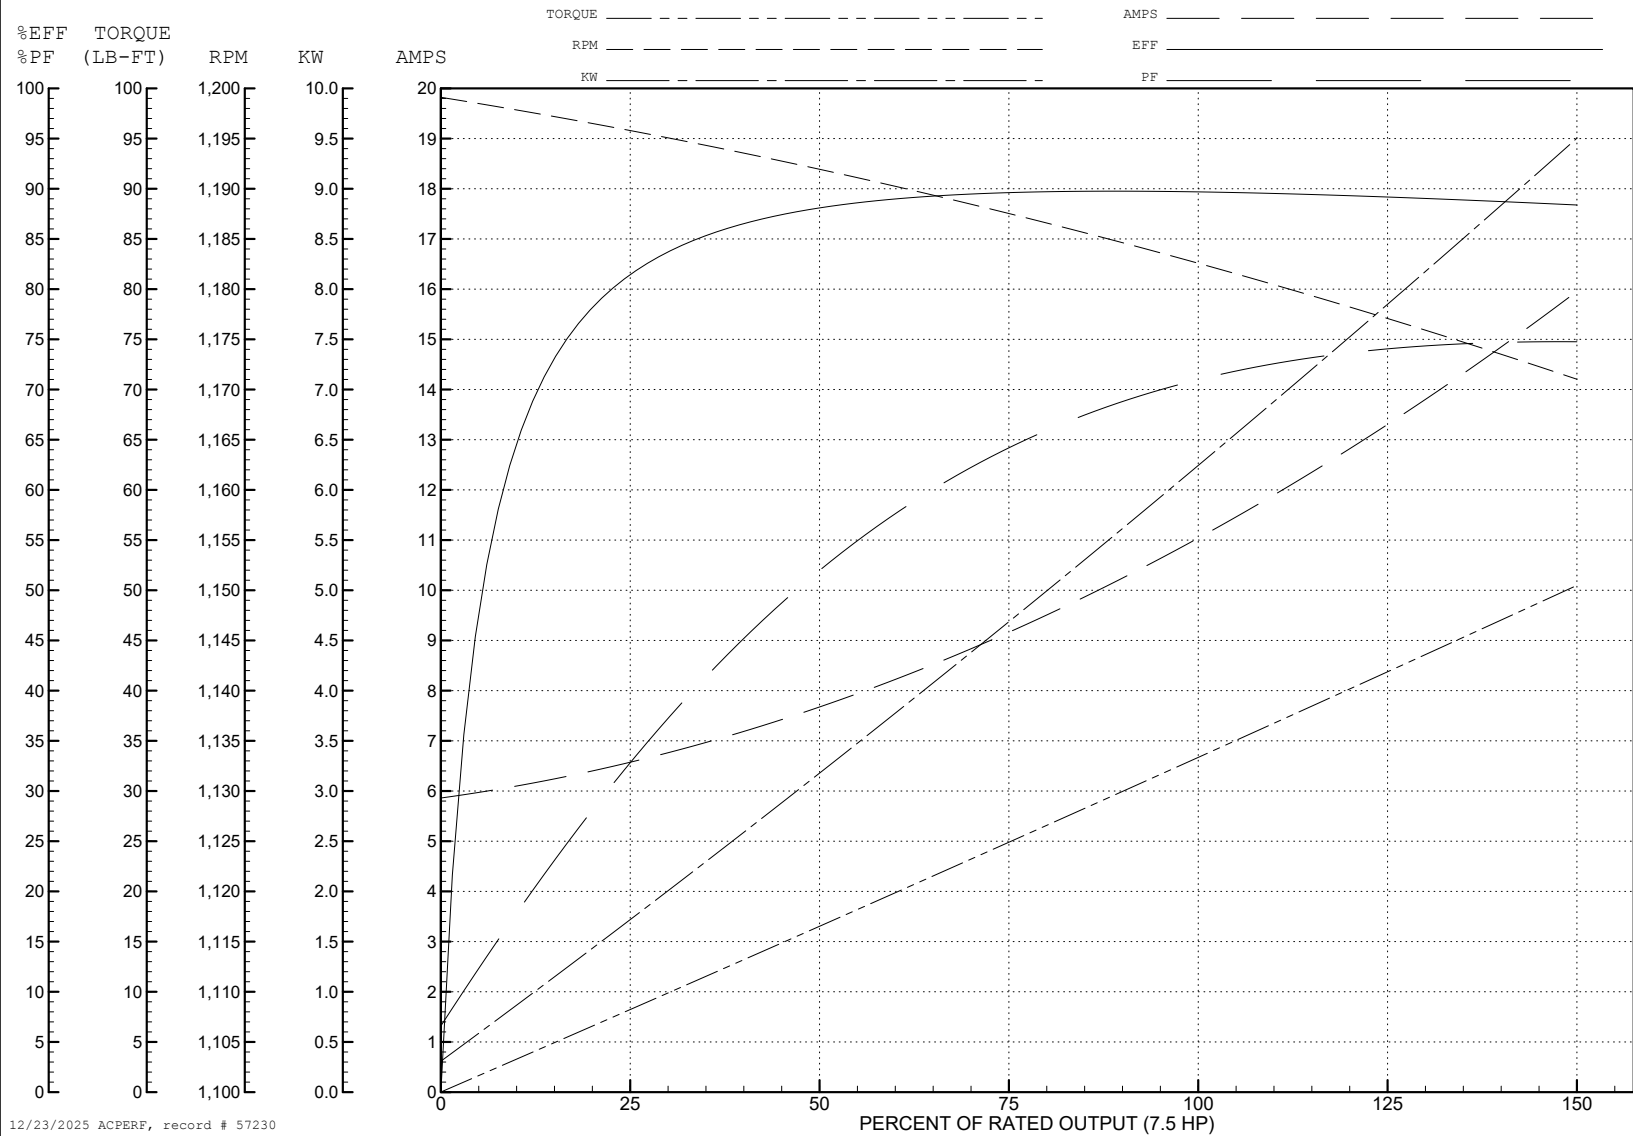

AC Induction Motor Performance Data

Record # 75705

Typical performance - not guaranteed values

Winding: 09WGT118-R007			Type: 0954M		Enclosure: XPFC			
Nameplate Data			380 V, 50 Hz: High Voltage Connection					
Rated Output (HP)		7.5//5	Full Load Torque		26.49 LB-FT			
Volts		230/460//190/380	Start Configuration		direct on line			
Full Load Amps		22/11//19.2/9.6	Breakdown Torque		109 LB-FT			
R.P.M.		1180//980	Pull-up Torque		43.5 LB-FT			
Hz		60//50	Phase		3	Locked-rotor Torque	60.46 LB-FT	
NEMA Design Code		A	KVA Code		J	Starting Current		73.36 A
Service Factor (S.F.)					1	No-load Current		6 A
NEMA Nom. Eff.		91	Power Factor		70	Line-line Res. @ 25°C		0.895 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		28°C		
S.F. Amps				Temp. Rise @ S.F. Load		34°C		
				Locked-rotor Power Factor		28.9		
				Rotor inertia		4.34 LB-FT2		

Load Characteristics 380 V, 50 Hz, 5 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	28	46	58	65	71	74
Efficiency	81.2	87.9	90.1	90.6	90.3	89.6
Speed	997	994	990	987	983	979
Line amperes	6.29	7.06	8.13	9.52	11.08	12.87


ABB Motors and Mechanical Inc.


WINDING # 09WGT118

Typical performance - not guaranteed values.

5 HP 3 PH 50 HZ 987 RPM 380 V 0954M

TORQUES (LB-FT): PO=109 PU=43.5 LR=60.46 LRA=73.36

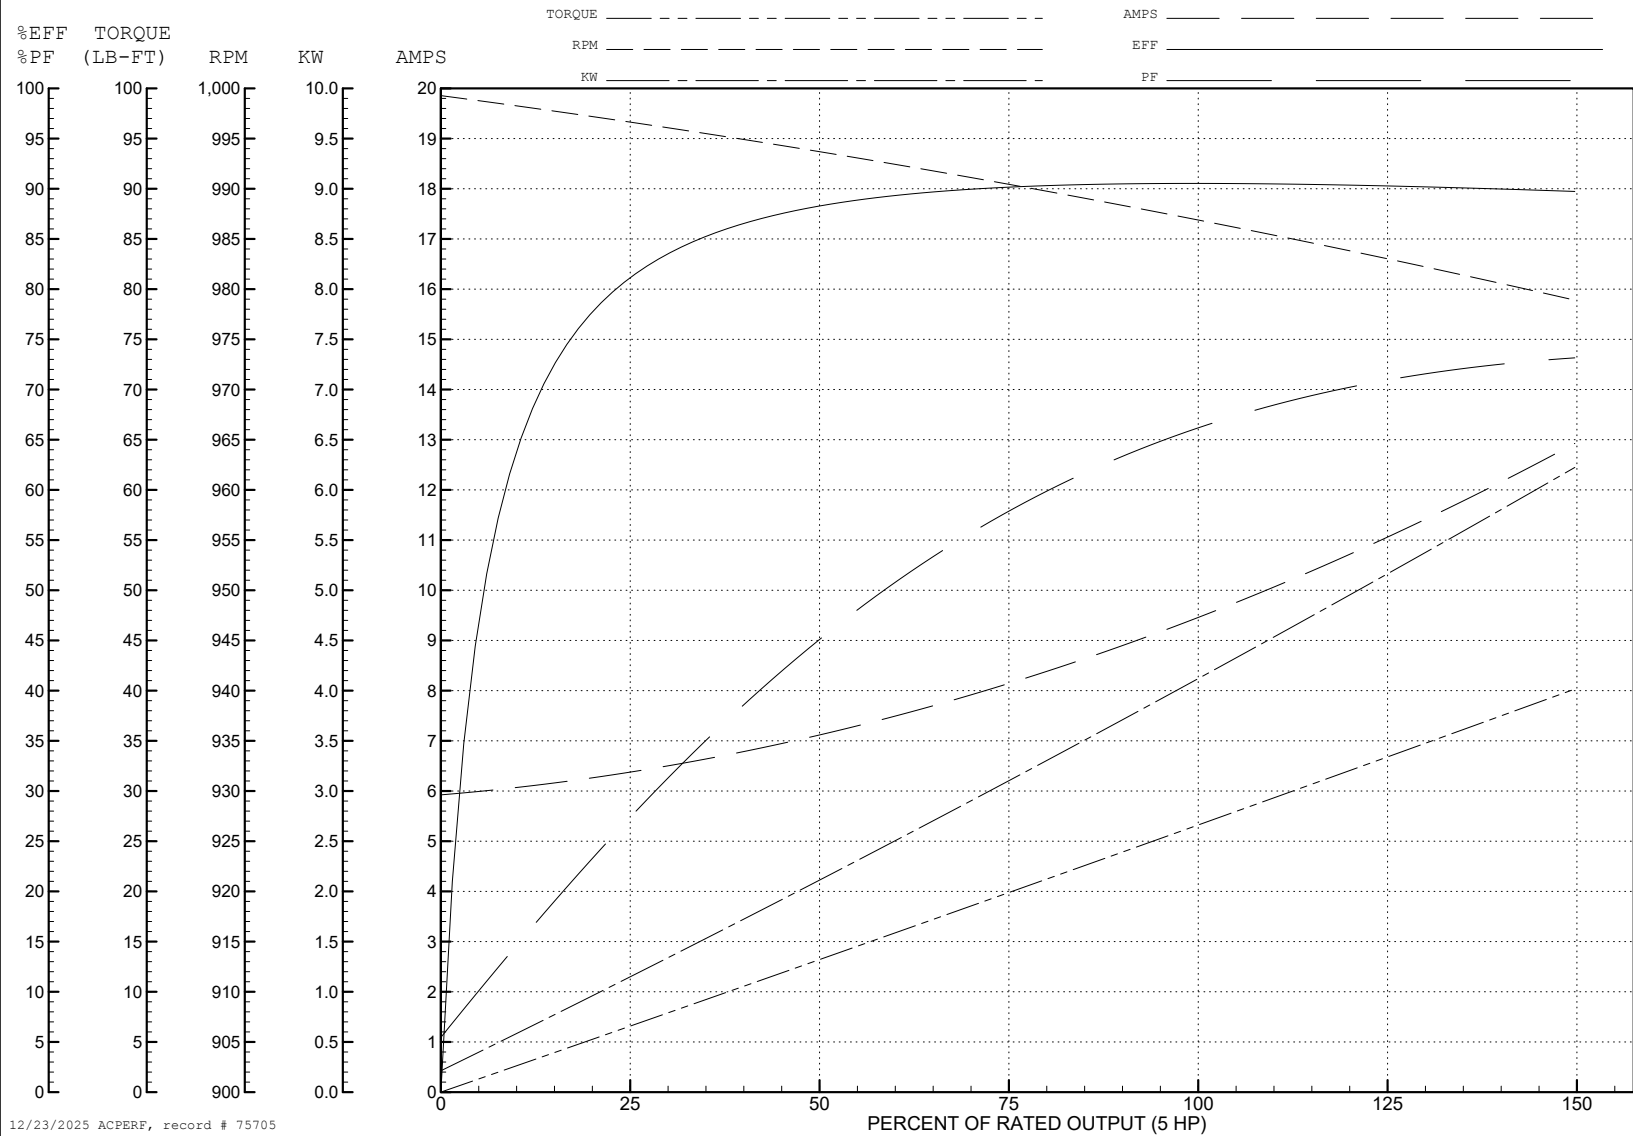

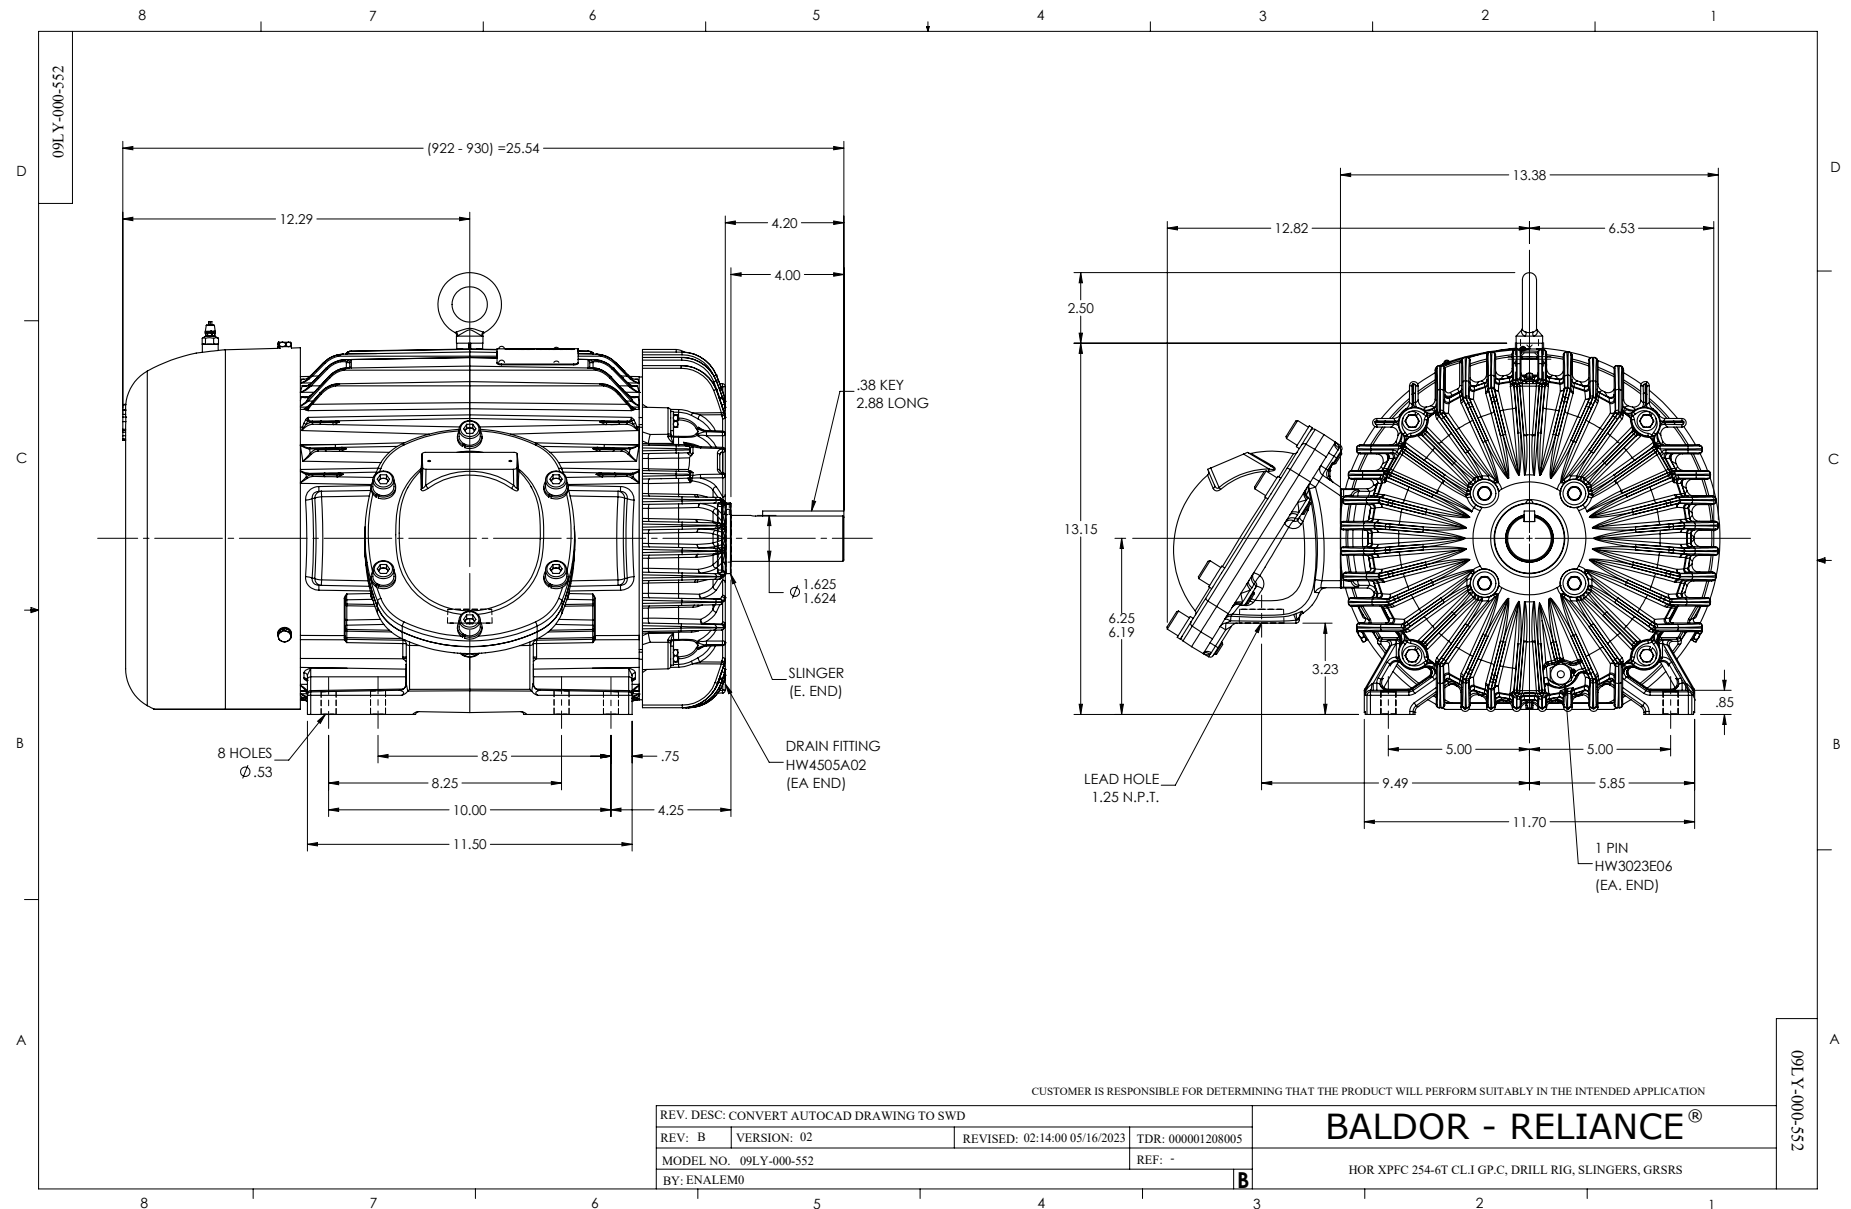

CD0005



- NOTES:
- 1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
 - 2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
 - 3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
 - 4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
900000		FILE: AAA00005140	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS

CD0005