



Customer information packet

DRX32444T

40HP, 1775//1480RPM, 3PH, 60HZ, 324T, XPFC, F1

Class - CLI GP C,D

Division - Division I

Specifications

Enclosure	XPFC
Frame	324T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CLI GP C,D
Haz Area Division	Division I
Motor Letter Type	Three Phase
Output @ Frequency	40.000 HP @ 60 HZ 30.000 HP @ 50 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 190.0 V @ 50 HZ 230.0 V @ 60 HZ 380.0 V @ 50 HZ
Agency Approvals	UL CSA EEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	6
Current @ Voltage	45.000 A @ 380.0 V 48.000 A @ 460.0 V 90.000 A @ 190.0 V 96.000 A @ 230.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	94.1 %

Part detail

Revision	H
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	12WGY276
Layout	12LYG128
Eff. date	11-05-2024
CD Diagram	CD0180
Poles	04
Leads	9#8
Proprietary	False
Created date	03-07-2019

Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	45.0 a
Insulation Class	F
Inverter Code	Not Inverter
IP Rating	NONE
KVA Code	H
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	2700 rpm
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	1254M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	32.00 IN
Power Factor	82
Product Family	Chemical Process Features
Pulley Face Code	Standard
Rodent Screen	None
RoHS Status	ROHS NON-COMPLIANT
Service Factor	1.00
Shaft Diameter	2.125 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Speed	1775 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None

Winding Thermal 2

None

Nameplate

NP1401XPSLEV												
NO.						CC	010A					
S/N						TEMP CODE	T3C					
SPEC.	12-0000-0549					INV.TYPE	PWM					
CAT.NO.	DRX32444T					C HP FR	60	C HP TO	90			
HP	40//30					CT HZ FROM	6	CT HZ TO	60			
VOLTS	230/460//190/380					VT HZ FROM	6	VT HZ TO	60			
AMPS	96/48//90/45					MAG CUR	40/20					
RPM	1775//1480					MX RPM	2700					
HZ	60//50	PH	3	CL	F	NOM.EFF.	94.1					
SER.F.	1.00	DES	A	SL HZ	0.83	WK2	7.19					
FRAME	324T	RATING		40C AMB-CONT								
	55C AMB AT 1.0 SF, 60C RISE											
	1.15SF ON SINEWAVE					NEMA MG-1 PT.5,IP55						

AC Induction Motor Performance Data

Record # 43813

Typical performance - not guaranteed values

Winding: 12WGY276-R023				Type: 1254M		Enclosure: XPFC	
Nameplate Data				460 V, 60 Hz: High Voltage Connection			
Rated Output (HP)		40		Full Load Torque		118 LB-FT	
Volts		230/460		Start Configuration		direct on line	
Full Load Amps		96/48		Breakdown Torque		386 LB-FT	
R.P.M.		1775		Pull-up Torque		193 LB-FT	
Hz	60	Phase	3	Locked-rotor Torque		216 LB-FT	
NEMA Design Code		A	KVA Code	H	Starting Current		338 A
Service Factor (S.F.)		1		No-load Current		19.9 A	
NEMA Nom. Eff.		94.1	Power Factor	82	Line-line Res. @ 25°C		0.14898 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		54°C	
				Locked-rotor Power Factor		27	
				Rotor inertia		7.19 LB-FT2	

Load Characteristics 460 V, 60 Hz, 40 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	47	69	78	83	85	85
Efficiency	90.1	93.5	94.2	94.2	93.8	93.1
Speed	1793.5	1788	1782.5	1776.6	1770.7	1764.1
Line amperes	22.9	29.5	38.4	48.1	59.2	70.8


ABB Motors and Mechanical Inc.

WINDING # 12WGY276

Typical performance - not guaranteed values.

40 HP 3 PH 60 HZ 1775 RPM 460 V 1254M

TORQUES (LB-FT): PO=386 PU=193 LR=216 LRA=338

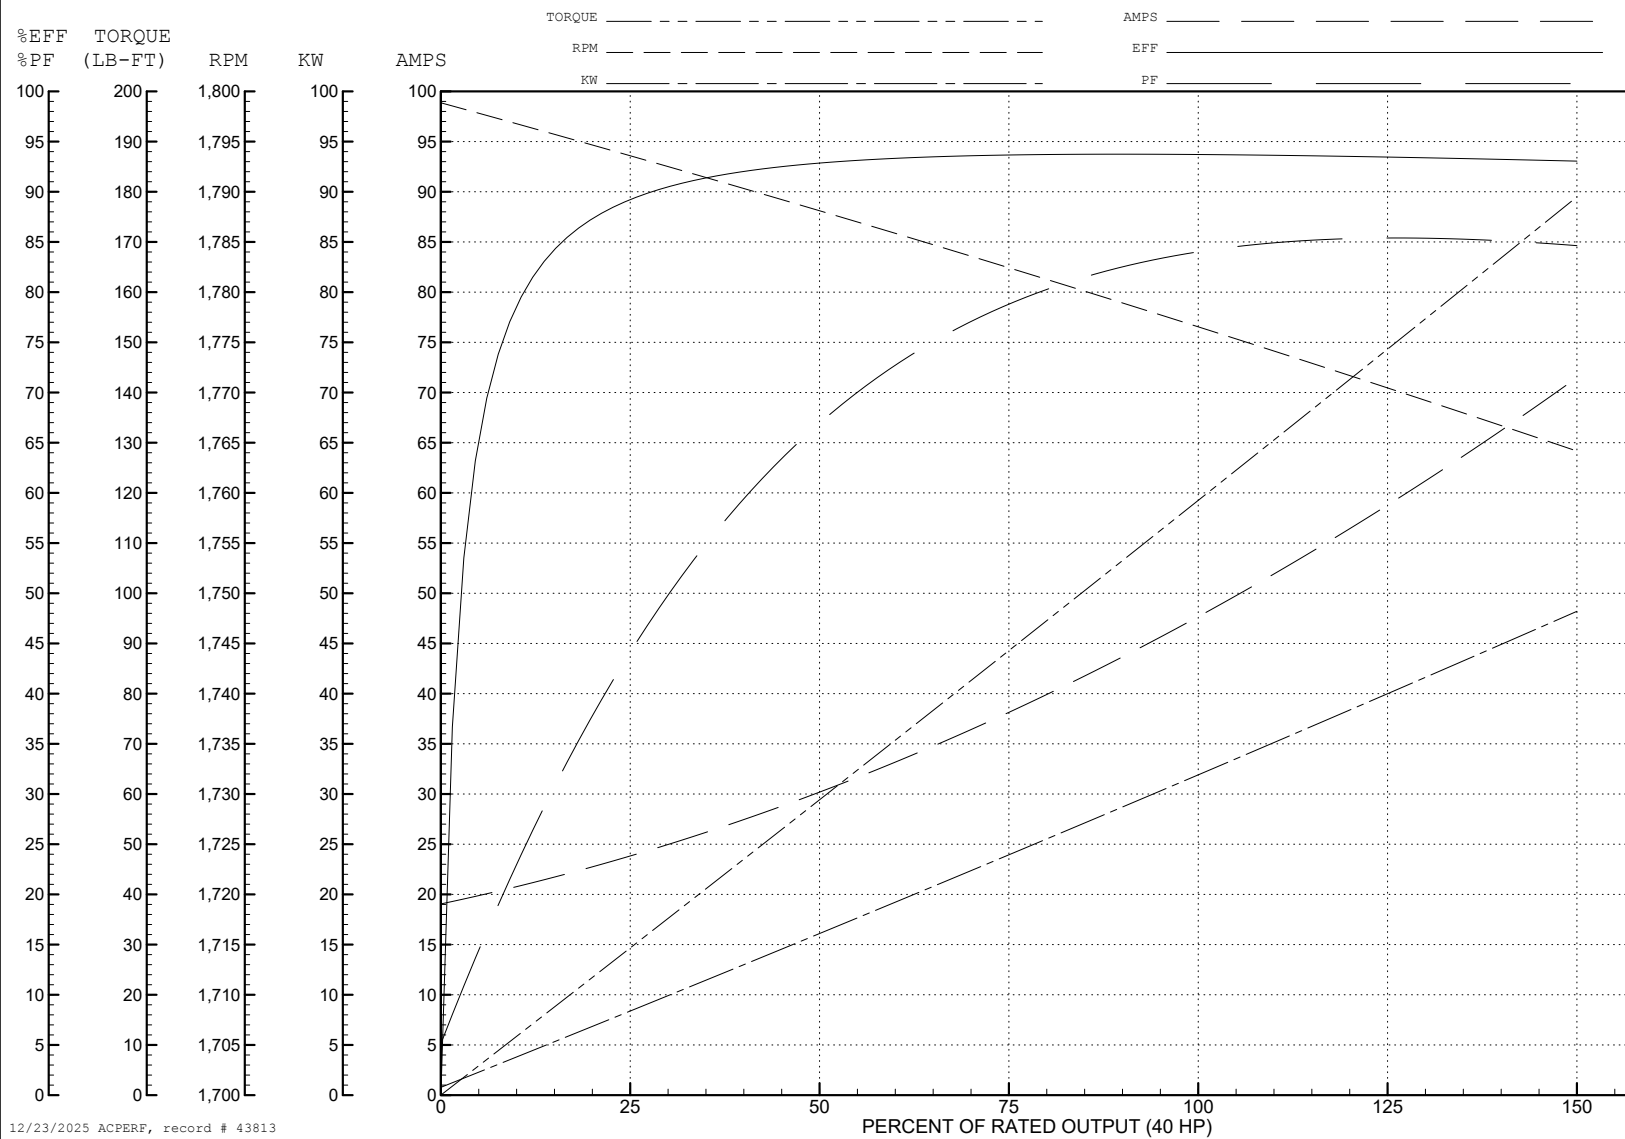

AC Induction Motor Performance Data

Record # 74483

Typical performance - not guaranteed values

Winding: 12WGY276-R040		Type: 1254M	Enclosure: XPFC		
Nameplate Data		380 V, 50 Hz: High Voltage Connection			
Rated Output (HP)	40//30	Full Load Torque	106 LB-FT		
Volts	230/460//190/380	Start Configuration	direct on line		
Full Load Amps	96/48//90/45	Breakdown Torque	373 LB-FT		
R.P.M.	1775//1480	Pull-up Torque	203 LB-FT		
Hz	60//50	Phase	3	Locked-rotor Torque	227 LB-FT
NEMA Design Code	A	KVA Code	H	Starting Current	331 A
Service Factor (S.F.)			1	No-load Current	19.39 A
NEMA Nom. Eff.	94.1	Power Factor	82	Line-line Res. @ 25°C	0.145 Ω
Rating - Duty	40C AMB-CONT		Temp. Rise @ Rated Load	47°C	
S.F. Amps			Temp. Rise @ S.F. Load	57°C	
			Locked-rotor Power Factor	30.4	
			Rotor inertia	7.19 LB-FT2	

Load Characteristics 380 V, 50 Hz, 30 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	44	66	77	82	84	85
Efficiency	88.7	92.8	93.7	93.1	92.8	92.5
Speed	1494	1489	1484	1479	1474	1468
Line amperes	21.96	27.73	35.61	44.25	54.18	64.6


ABB Motors and Mechanical Inc.


WINDING # 12WGY276


Typical performance - not guaranteed values.

30 HP 3 PH 50 HZ 1479 RPM 380 V 1254M

TORQUES (LB-FT): PO=373 PU=203 LR=227 LRA=331

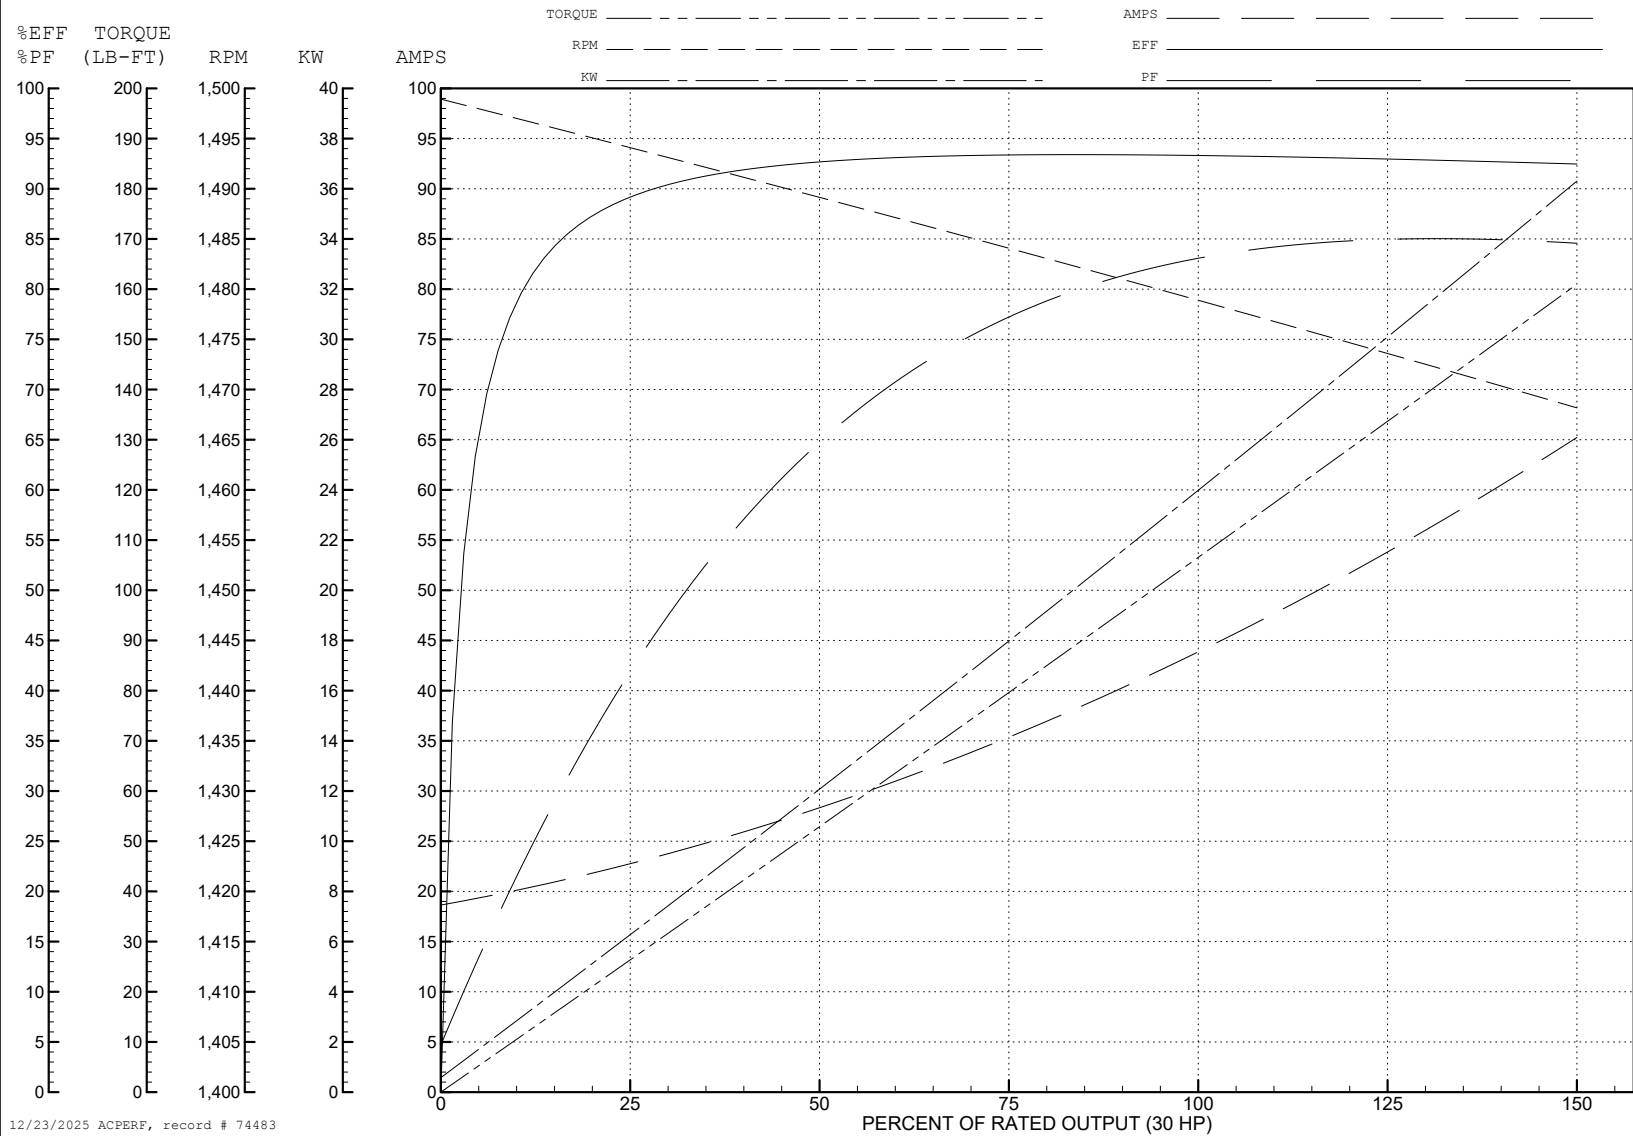


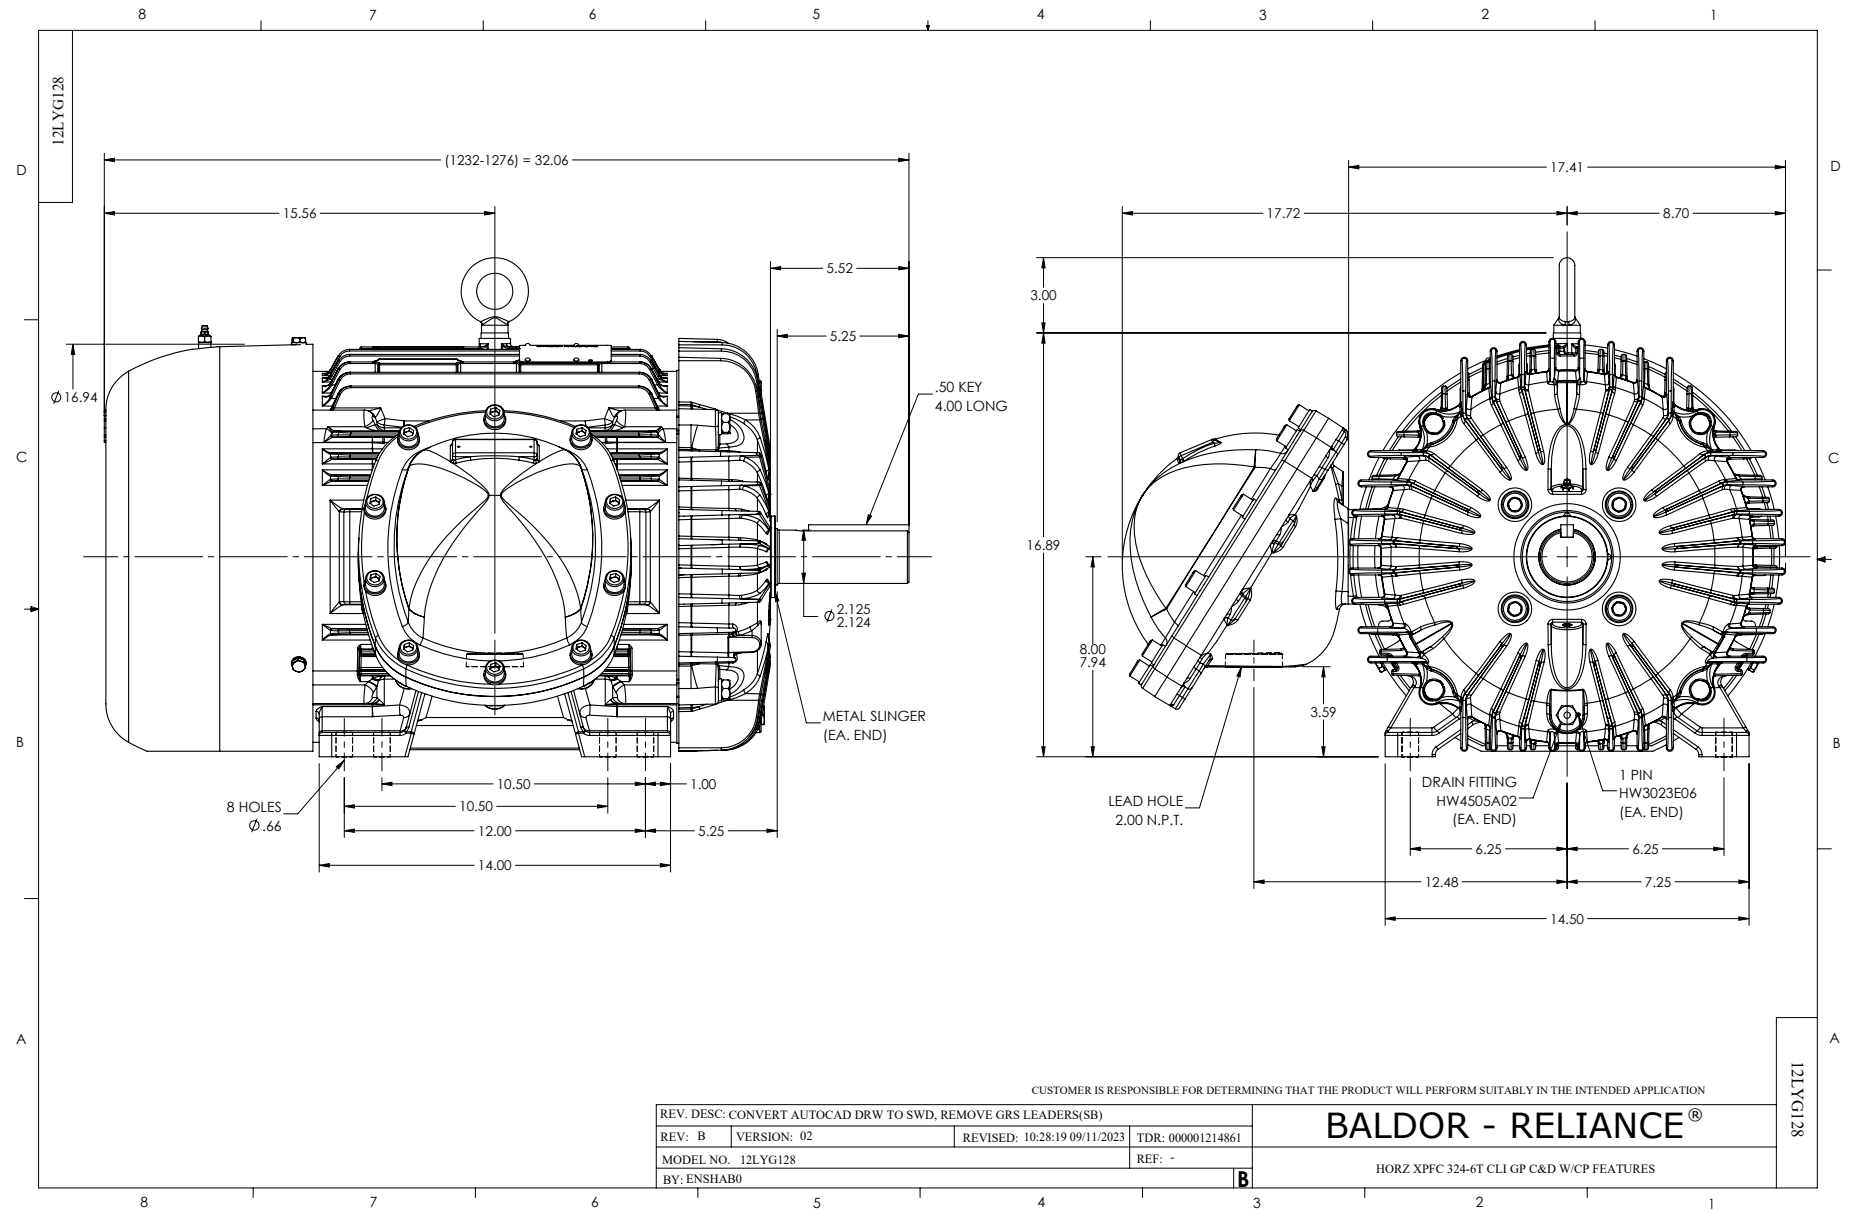

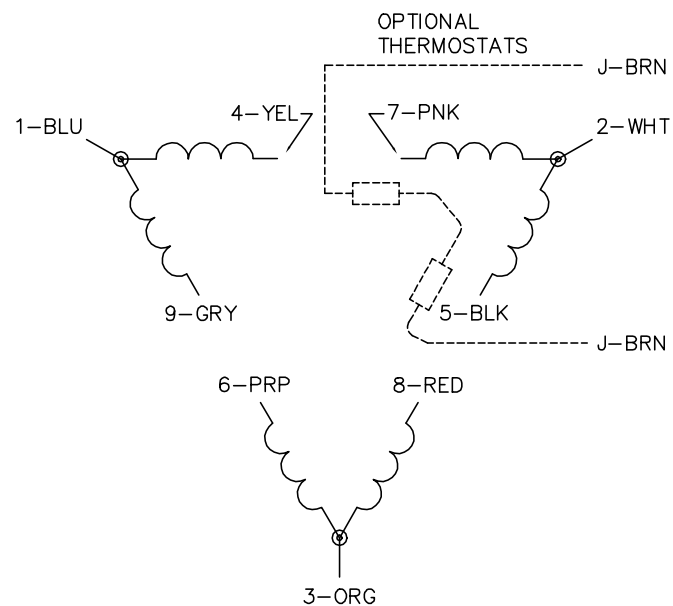


CD0180

LOW VOLTAGE
(2D)



HIGH VOLTAGE
(1D)



NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0180

REV. DESC: ADD CLASS CONN00000007		
REV. LTR: D	VERSION: 01	TDR: 000001099922
FILE: \AAA\00005\148	REVISED: 10:25:29 02/19/2019	BY: ENBRI0
MTL: -		

BALDOR - RELIANCE®

3PH, DV, 9 LEADS, DELTA CONNECTION

SH 1 of 1