



Customer information packet

DRX40144T

100HP, 1785RPM, 3PH, 60HZ, 405T, TEFC, F1

Class - CLI GP C,D

Division - Division I

Specifications

Enclosure	TEFC
Frame	405T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CLI GP C,D
Haz Area Division	Division I
Motor Letter Type	Three Phase
Output @ Frequency	100.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	UL CSA CCSAUSEEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Constant Torque Speed Range	6-60
Current @ Voltage	112.000 A @ 460.0 V 224.000 A @ 230.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	95.4 %
Feedback Device	NO FEEDBACK
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	112.0 a
Insulation Class	F
Inverter Code	Inverter Ready

Part detail

Revision	A
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	A40WG0692
Layout	617433-608
Eff. date	05-06-2024
CD Diagram	416820-002
Poles	04
Leads	3#2,6#4
Proprietary	False
Created date	03-08-2019

IP Rating	NONE
KVA Code	G
Max Speed	3600 rpm
Motor Lead Quantity/Wire Size	3 @ 2 AWG
Motor Standards	NEMA
Motor Type	A40064M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	38.22 IN
Power Factor	87
Product Family	General Industrial
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Service Factor	1.15
Shaft Diameter	2.875 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1785 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat


Nameplate


NP2496L	
MOBIL POLYREX EM	


000613006PC		
CLASS I GROUP	C D X	NO.
CLASS II GROUP	X X X	
OPERATING TEMP CODE	T3C	

NP3140L

SPEC NO.	A40-7255-0692			CAT.NO.		DRX40144T				FRAME	405T
HP	100	VOLTS	230/460		PHASE	3	DESIGN	B	TYPE	P	
RPM	1785	AMPS	224/112		HZ	60	AMB	40	SF	1.00	
DRIVE END BEARING	80BC03J30X		DUTY	CONT	INSUL.CLASS			F			
OPP D.E. BEARING	80BC03J30X		ENCL	TEFC	CODE	G					
SF	1.15	WK2	26.346	MAG CUR	28.6		RPM MAX	3600			
CT HZ	6-60	VT HZ	0-60	CHP HZ	60-90		NEMA-NOM-EFF		95.4		
	SUIT FOR 55C AMB AT 1.00 SF					IP55					
SER.NO.				MOTOR WEIGHT							

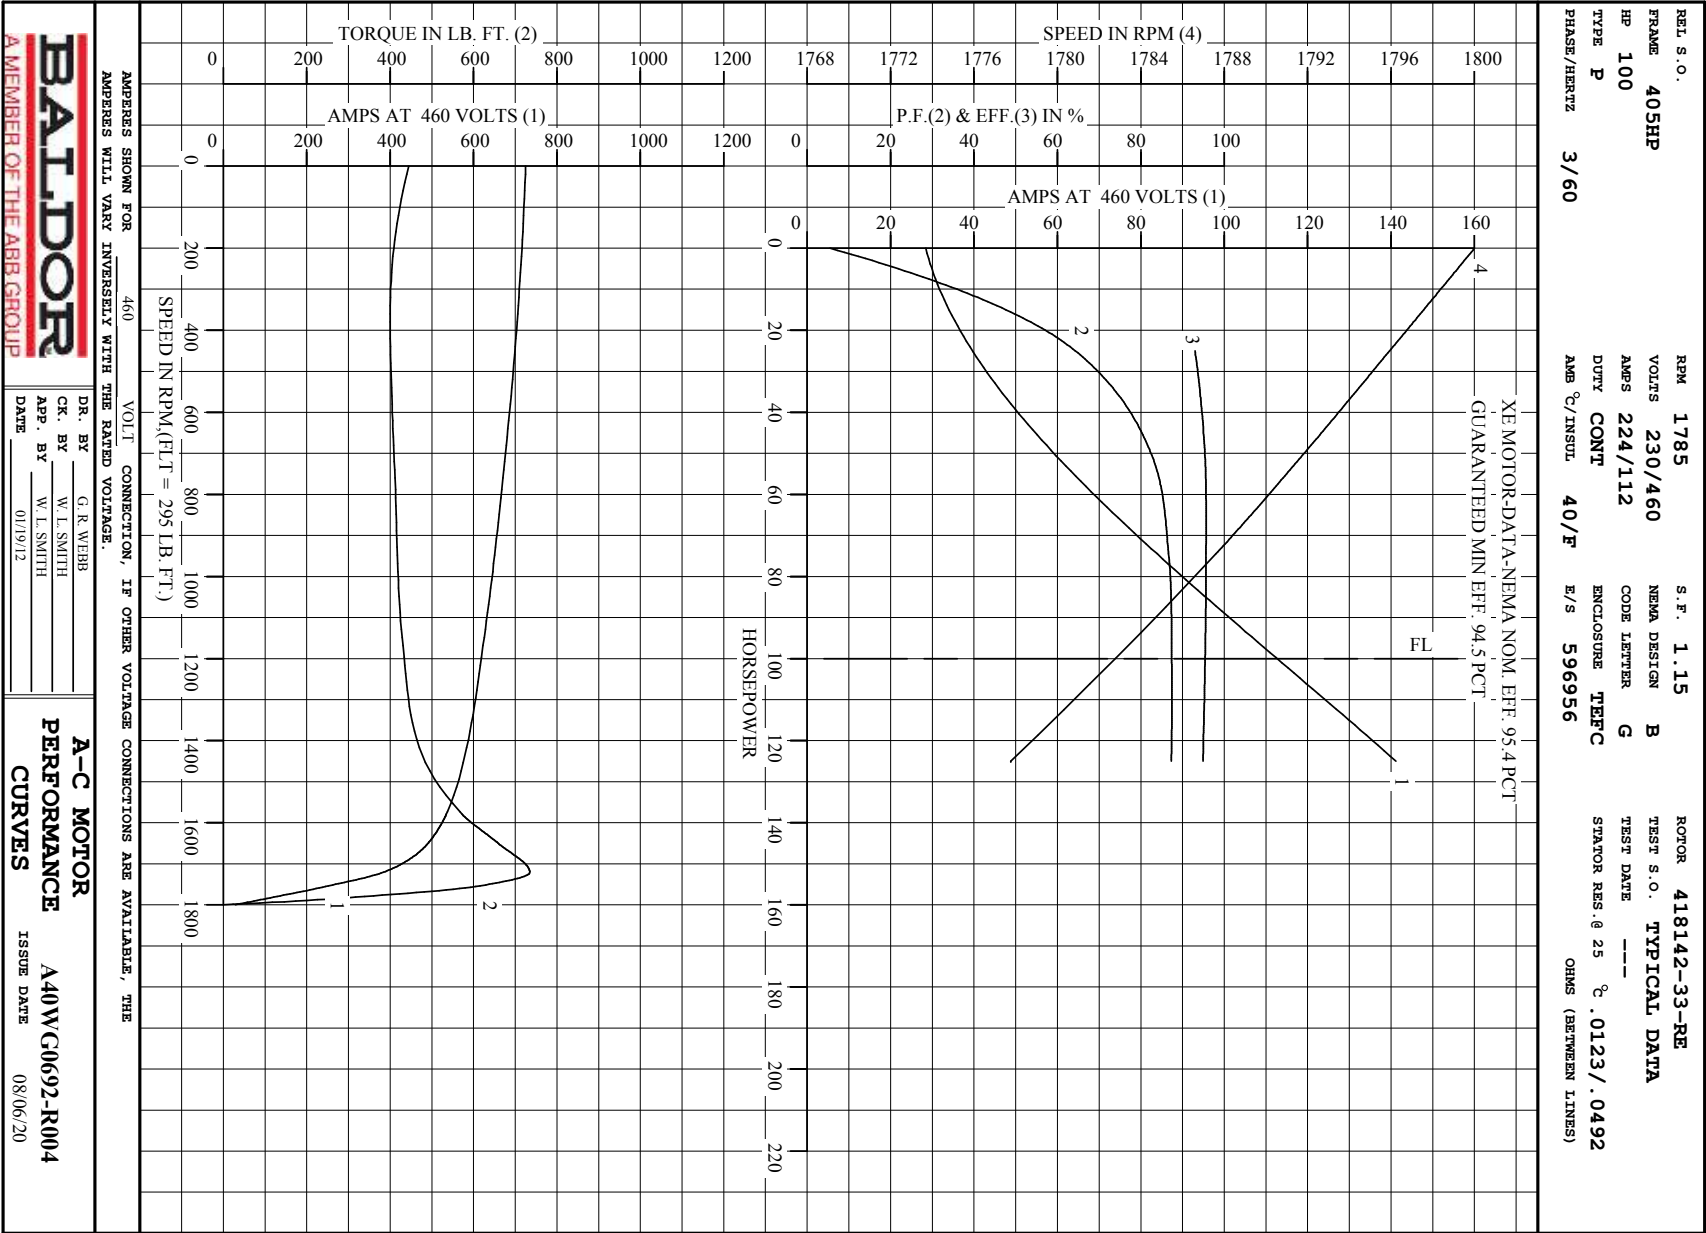

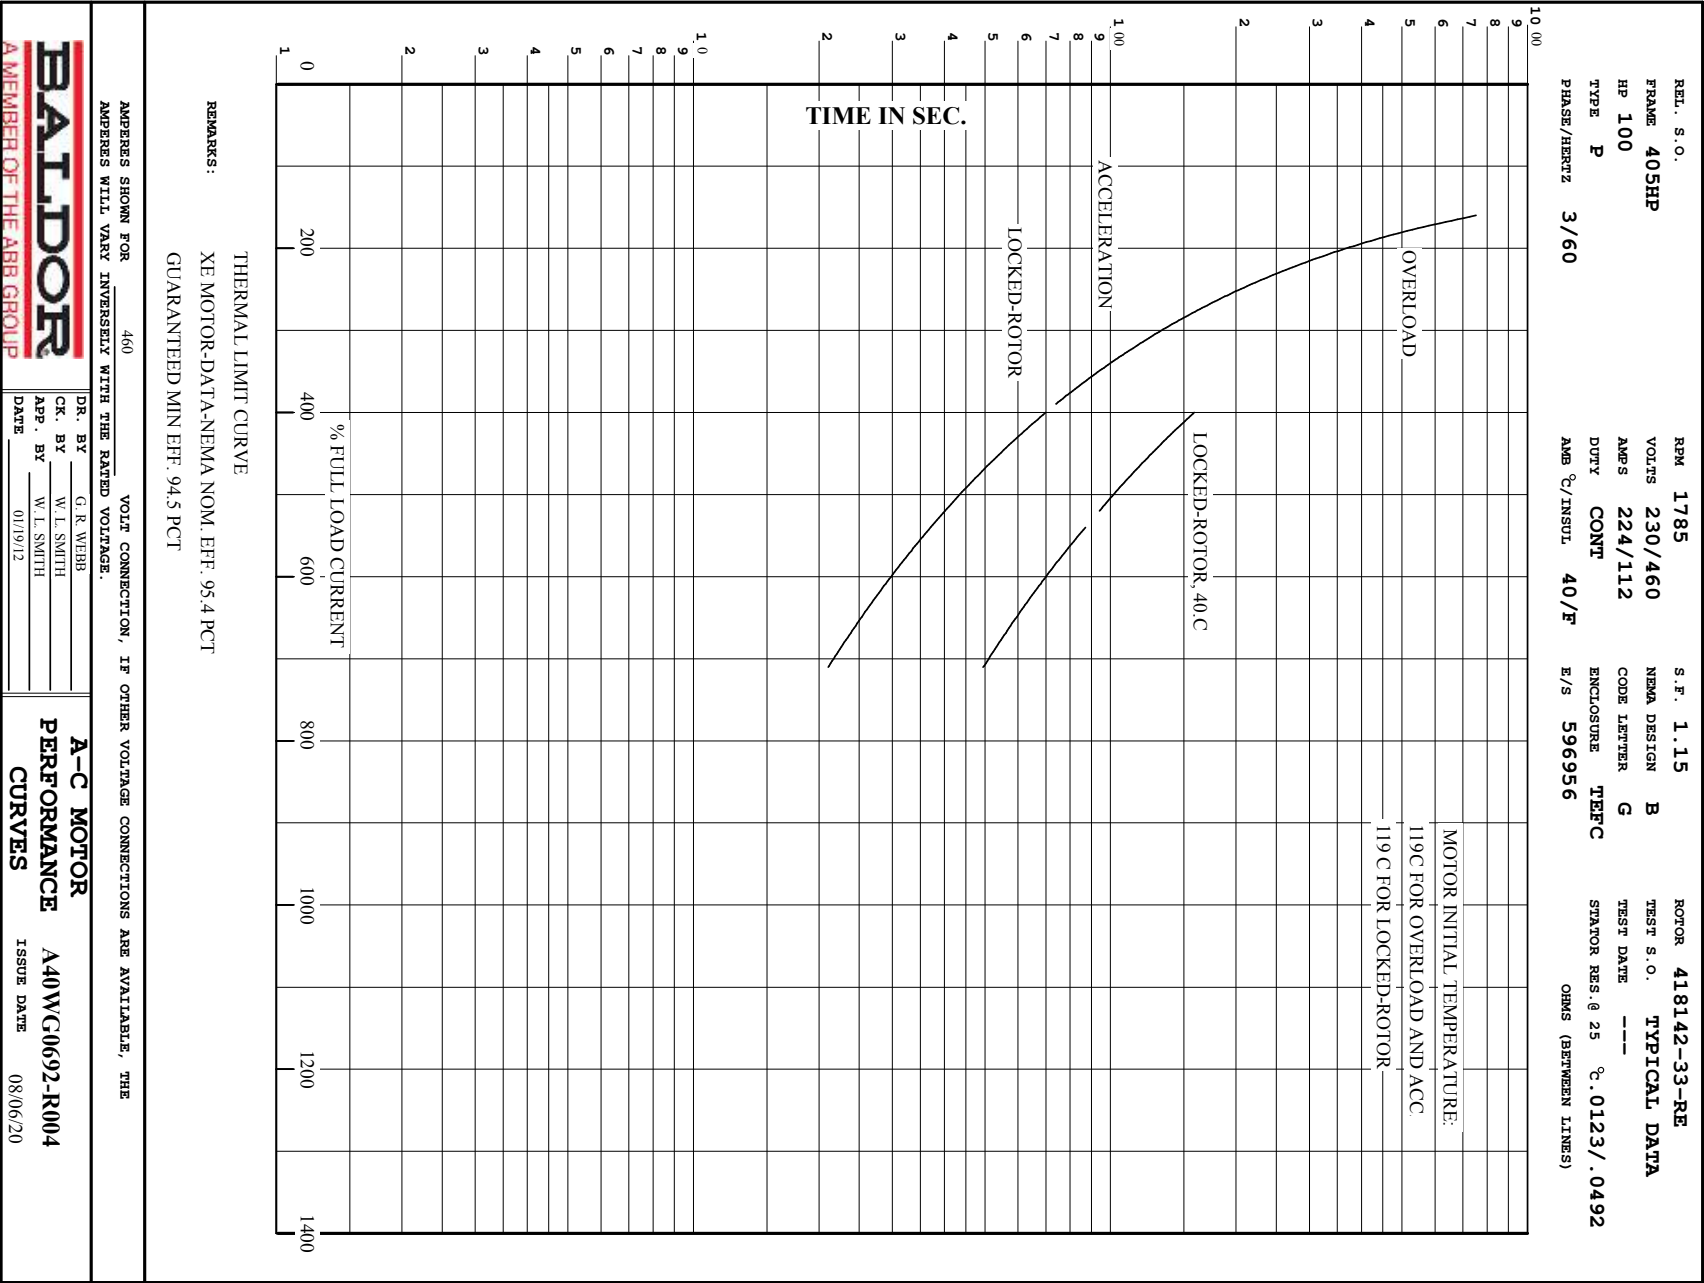

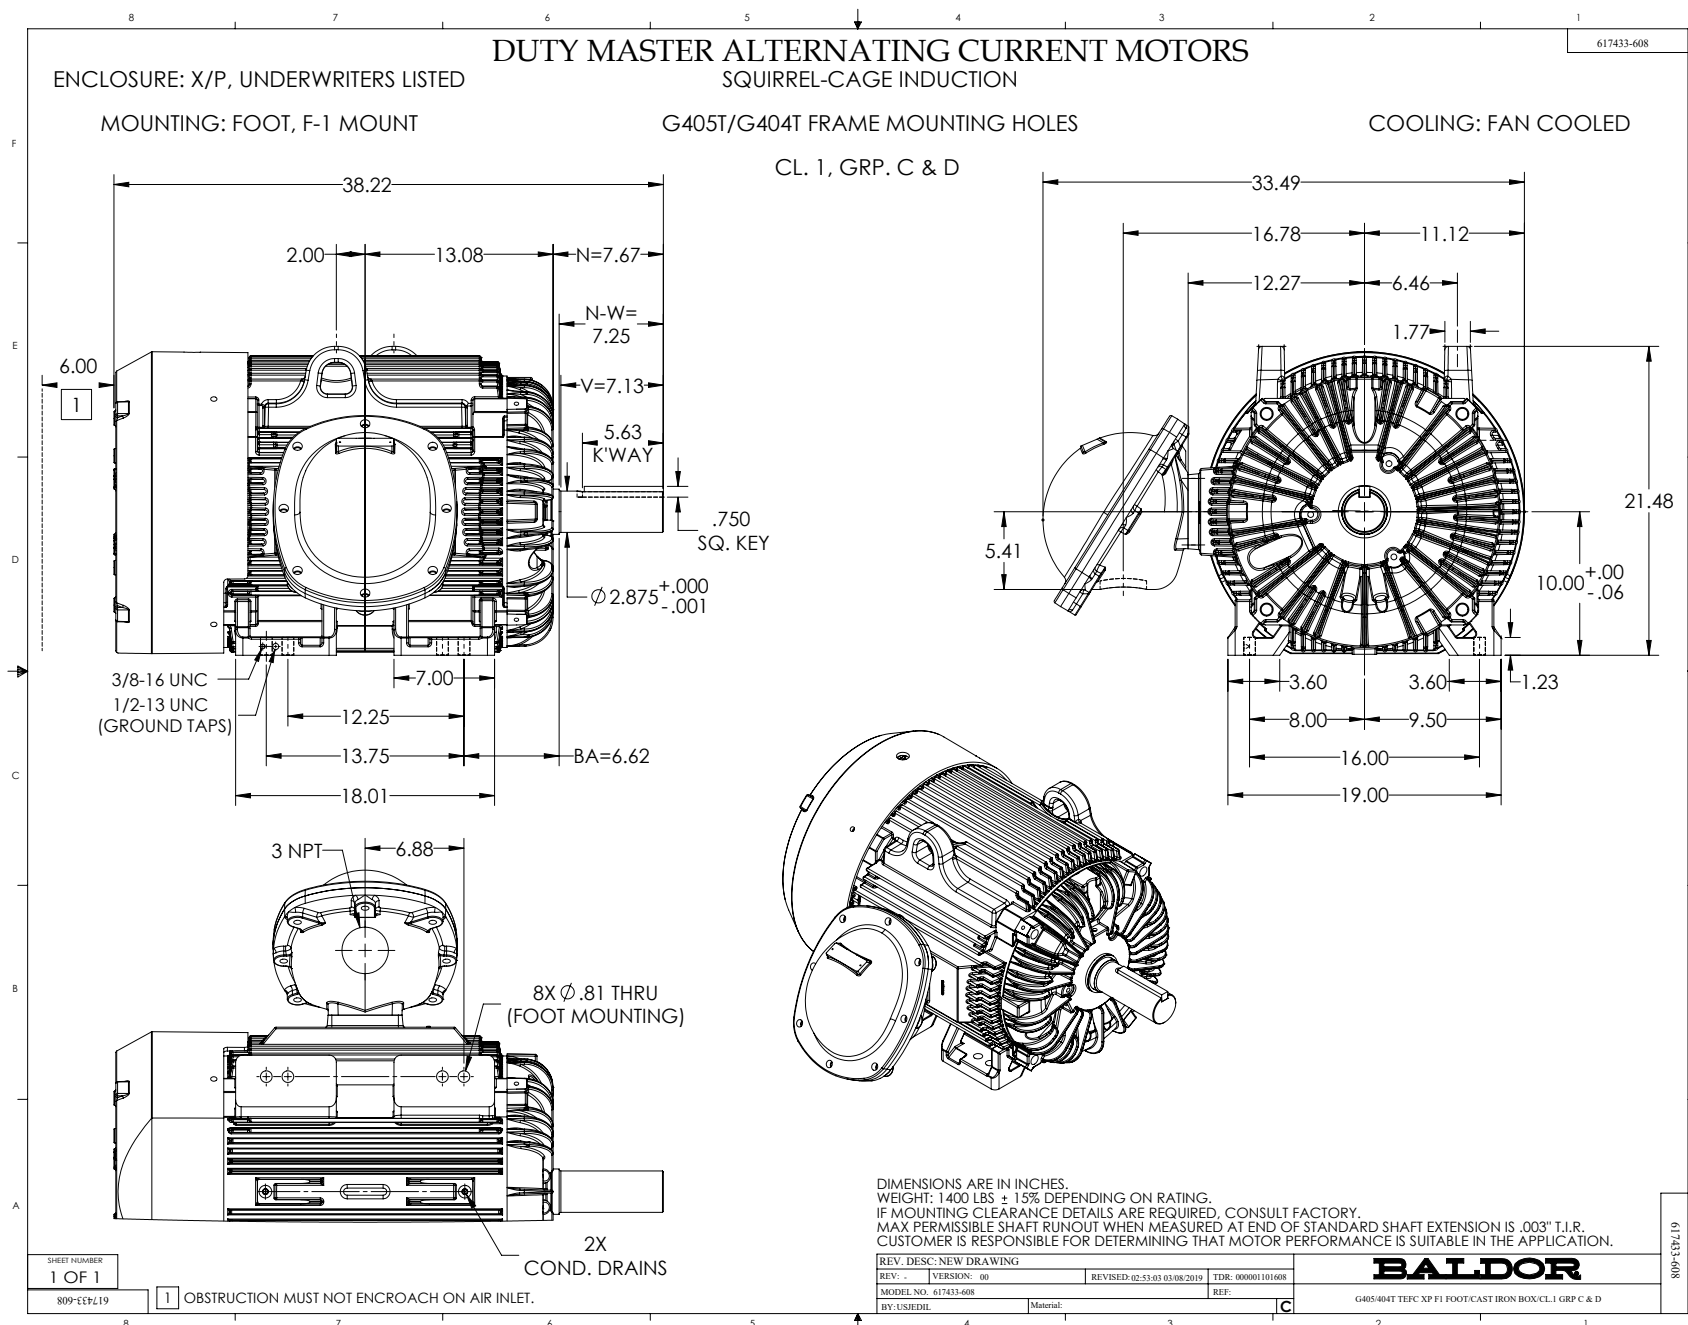

CONNECTION DIAGRAM
ACCESSORIES

MOTOR WINDING THERMOSTATS		
CONTACTS	_____ @ _____ ° C	
FIGURE NUMBER	_____	
CONTACT RATING		
VOLTS	CONTINUOUS AMPERES	INRUSH AMPERES
110-120	3. 0	30
220-240	1. 5	15
440-480	0. 75	7. 5
550-600	0. 60	6. 0

THERMOSTATS	
NORMALLY CLOSED	NORMALLY OPEN
FIGURE 1	FIGURE 4
FIGURE 2	FIGURE 5
FIGURE 3	FIGURE 6
FIGURE 7	FIGURE 8

CUSTOMER _____ CUSTOMER ORDER NO. _____ S.O. NO. _____

418174-006

418174-006

REV. DESC: LOADED TO BUS		
REV. LTR: A	VERSION: 01	TDR: 000000570390
FILE: \RAG\00013\849	REVISED: 10:16:21 12/07/2010	BY: RAGDRF
MTL: -		



BALDOR

A-C MOTOR CONNECTION ACCESSORIES

SH 1 of 1

416820-002

A-C MOTOR
CONNECTION DIAGRAM
STANDARD 9 LEAD DELTA-CONNECTED

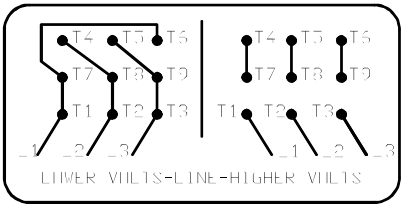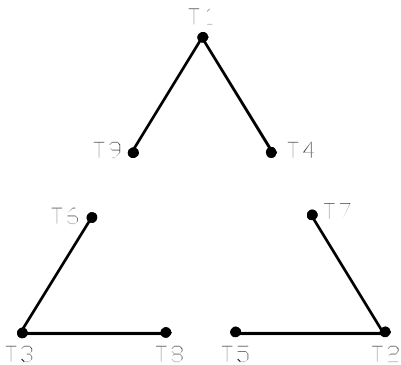

(N.P. 1575-B)

REV. DESC: FONT CHANGE FOR PDF SEARCHABLE		
REV. LTR: A	VERSION: 01	TDR: 000001009382
FILE: \MGA\00000\661	REVISED: 02:46:19 02/13/2020	BY: MGHMTT
MTL: —		

BALDOR - RELIANCE®

CONN DIAG — STANDARD 9 LEAD, DELTA-CONNECTED
SH 1 of 1

416820-002