



Customer information packet

EBM3714T-D

10HP, 1770RPM, 3PH, 60HZ, 215T, 3752M, TEFC, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	215T
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	10.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	CE CSA UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Brake Torque	50.0 lb-ft
Current @ Voltage	24.000 A @ 230.0 V 25.400 A @ 208.0 V 12.000 A @ 460.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	91.7 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Fan Housing Cover For Brake

Part detail

Revision	Q
Type	AC
Mech. spec.	37M908
Base	
Status	PRD/A
Elec. spec.	37WGS518
Layout	37LYM908
Eff. date	10-04-2023
CD Diagram	CD0005
Poles	04
Leads	9#14
Proprietary	False
Created date	02-22-2013

Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	12.0 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	K
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 14 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3752M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	26.92 IN
Power Factor	85
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.375 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1770 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor

Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP4304L									
CAT.NO.	EBM3714T-D								
SPEC.	37M908S518G1								
HP	10/7.5KW					PH	3		
VOLTS	230/460								
AMPS	24/12								
R.P.M. (1/MIN)	1770					WT.	75		KG
FRAME	215T		HZ	60			I.P.	44	
SER.F.	1.15	CODE	K	DES.	A	CLASS	F		
NOM.EFF.	91.7		% (100%)						
P.F.	85	IC411							
RATING	40C AMB-CONT				CC	010A			
DE	6307		ODE	6206					
ENCL	TEFC	SN							
	IE3 93.0 (75%) 92.6 (50%)								

AC Induction Motor Performance Data

Record # 112596

Typical performance - not guaranteed values

Winding: 37WGS518-R015				Type: 3752M		Enclosure: TEFC					
Nameplate Data				460 V, 60 Hz: High Voltage Connection							
Rated Output (HP)		10		Full Load Torque		29.45 LB-FT					
Volts		230/460		Start Configuration		direct on line					
Full Load Amps		24/12		Breakdown Torque		134 LB-FT					
R.P.M.		1770		Pull-up Torque		49.2 LB-FT					
Hz		60 Phase		3		Locked-rotor Torque		68.7 LB-FT			
NEMA Design Code		A		KVA Code		K		Starting Current		103 A	
Service Factor (S.F.)		1.15		No-load Current		5.49 A					
NEMA Nom. Eff.		91.7		Power Factor		85		Line-line Res. @ 25°C		0.93503 Ω	
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		63°C					
S.F. Amps				Temp. Rise @ S.F. Load		81°C					
				Locked-rotor Power Factor		35.5					
				Rotor inertia		1.28 lb-ft²					

Load Characteristics 460 V, 60 Hz, 10 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	42	66	79	85	84	87	84
Efficiency	88.9	92.1	92.4	91.8	90.3	89	90.9
Speed	1793.9	1786.8	1779.7	1771.8	1762.7	1752.5	1766
Line amperes	6.14	7.8	9.9	12.3	15	17.9	13.9


ABB Motors and Mechanical Inc.

WINDING # 37WGS518


Typical performance - not guaranteed values.

10 HP 3 PH 60 HZ 1770 RPM 460 V 3752M

TORQUES (LB-FT): PO=134 PU=49.2 LR=68.7 LRA=103

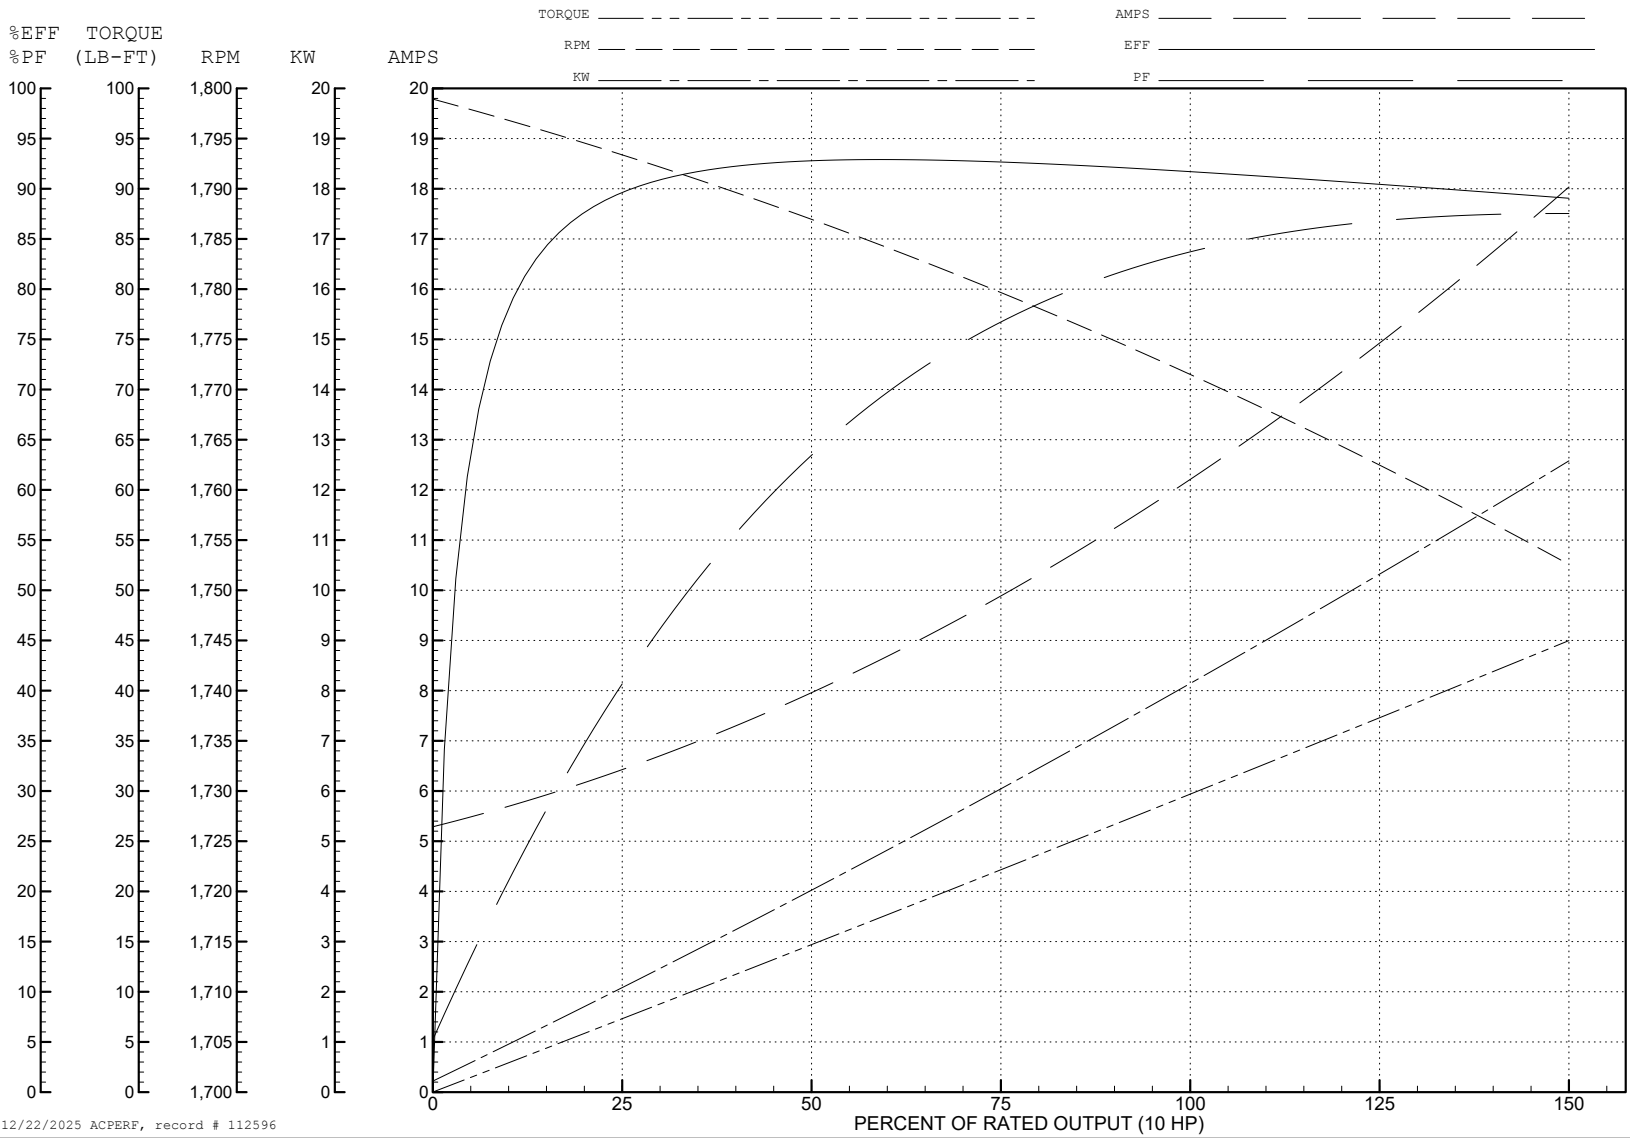

12/22/2025 ACPERF, record # 112596

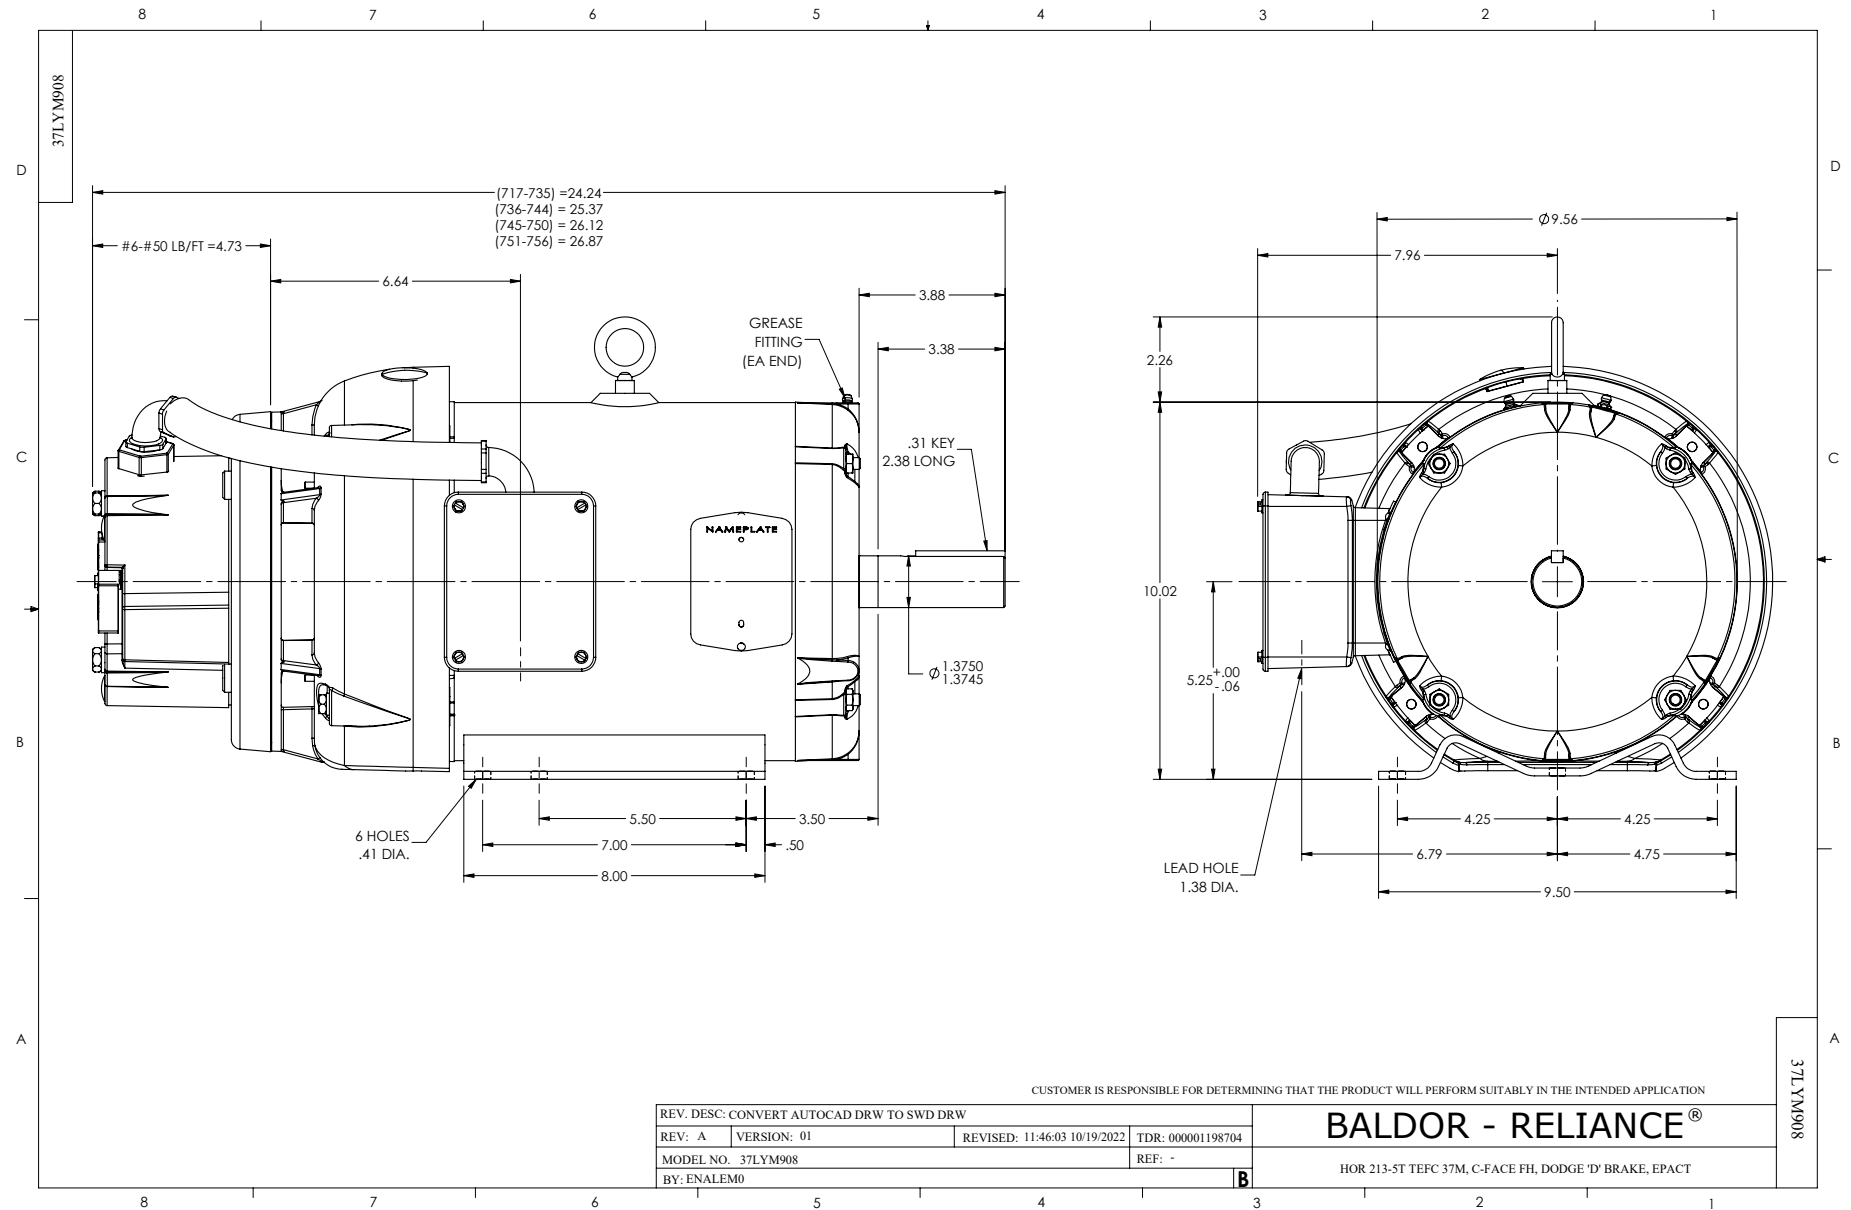



CD2120

WIRING CONNECTIONS (1 PHASE VAC)

	POWER LINE A	POWER LINE B	CAP TOGETHER	CAP ALONE
AC LOW VOLT.	B1	B2	B3 & B5	B4
AC HIGH VOLT.	B1 & B5	B2	---	B3 CAP ALONE B4 CAP ALONE
DC VOLT.	B1	B2	B3 & B5	B4

B1 WHITE
B2 BLACK
B3 GRAY
B4 BLUE
B5 RED

CD2120

REV. DESC: NEW

REV. LTR: -

VERSION: 00

TDR: 000000741785

FILE: \CKA\00037\282

REVISED: 12: 28: 11 04/12/2012

MTL: -

BY: CKRONSO

BALDOR • DODGE • RELIANCE

D-SERIES MOTOR BRAKE 5LD AC\DC

SH 1 of 1