



Customer information packet

ECP3663T-5

5HP, 3500RPM, 3PH, 60HZ, 184T, 0634M, TEFC, F1

Class - CLI GP A,B,C,D

Division - Division II

Specifications

Enclosure	TEFC
Frame	184T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CL I GP A,B,C,D
Haz Area Division	Division II
Motor Letter Type	Three Phase
Output @ Frequency	5.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	575.0 V @ 60 HZ
Agency Approvals	CSA EEV NEMA PREMIUM NEMA PREMIUM UR CCSA US
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	6
Current @ Voltage	4.600 A @ 575.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	89.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Enclosure Modification	Severe Duty Features
Feedback Device	NO FEEDBACK
Front Face Code	Standard

Part detail

Revision	N
Type	AC
Mech. spec.	06H483
Base	
Status	PRD/A
Elec. spec.	06WGX349
Layout	06LYH483
Eff. date	04-12-2024
CD Diagram	CD0006
Poles	02
Leads	3#16
Proprietary	False
Created date	06-11-2013

Front Shaft Indicator	None
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	4.6 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	L
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Max Speed	5400 rpm
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	3 @ 16 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0634M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	15.93 IN
Power Factor	90
Product Family	Chemical Processing (Not DC)
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.125 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	3500 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None

Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3257									
CAT.NO.	ECP3663T-5								
SPEC.	06H483X349G1								
HP	5 TE								
VOLTS	575								
AMP	4.6								
RPM	3500								
FRAME	184T		HZ	60		PH	3		
SER.F.	1.15	CODE	L	DES	A	CL	F		
RATING	40C AMB-CONT								
SN									
DE	6206		ODE	6206					
NEMA-NOM-EFF	89.5		PF	90					
G.MIN.EFF	89.5	CC	010A						
T. CODE	T3C	T=	160						

NP3260			
SPEC.	06H483X349G1		
D.E. BRG.	30BC02XP30X		
O.D.E. BRG.	30BC02XP30X		
GREASE	POLYREX EM		
RPM MAX	5400	MAX. KVAR	N/A
BLANK			
INV.TYPE	PWM		
T=	160		
C HP FR	60	C HP TO	90
CT HZ FROM	6	CT HZ TO	60
VT HZ FROM	3	VT HZ TO	60
HTR-VOLTS		HTR-AMPS	
HTR-WATTS		MAX. SPACE HEATER TEMP.	

AC Induction Motor Performance Data

Record # 47074

Typical performance - not guaranteed values

Winding: 06WGX349-R002			Type: 0634M	Enclosure: TEFC			
Nameplate Data			575 V, 60 Hz: Single Voltage Motor				
Rated Output (HP)		5	Full Load Torque		7.5 LB-FT		
Volts		575	Start Configuration		direct on line		
Full Load Amps		4.6	Breakdown Torque		40 LB-FT		
R.P.M.		3500	Pull-up Torque		26.6 LB-FT		
Hz	60	Phase	3	Locked-rotor Torque		31.7 LB-FT	
NEMA Design Code		A	KVA Code	L	Starting Current		50.1 A
Service Factor (S.F.)		1.15	No-load Current		1.68 A		
NEMA Nom. Eff.		89.5	Power Factor	90	Line-line Res. @ 25°C		3.42 Ω
Rating - Duty		40C	AMB-CONT		Temp. Rise @ Rated Load		43°C
S.F. Amps			Temp. Rise @ S.F. Load		51°C		
			Locked-rotor Power Factor		44.6		
			Rotor inertia		0.153 LB-FT2		

Load Characteristics 575 V, 60 Hz, 5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	56	77	85	89	91	91	93
Efficiency	82.1	88.4	90.1	90.4	89.9	89.6	88.1
Speed	3573	3549	3523	3497	3469	3439	3493
Line amperes	2.08	2.8	3.67	4.63	5.67	6.77	5.27


ABB Motors and Mechanical Inc.


WINDING # 06WGX349

Typical performance - not guaranteed values.




5 HP 3 PH 60 HZ 3500 RPM 575 V 0634M

TORQUES (LB-FT): PO=40 PU=26.6 LR=31.7 LRA=50.1

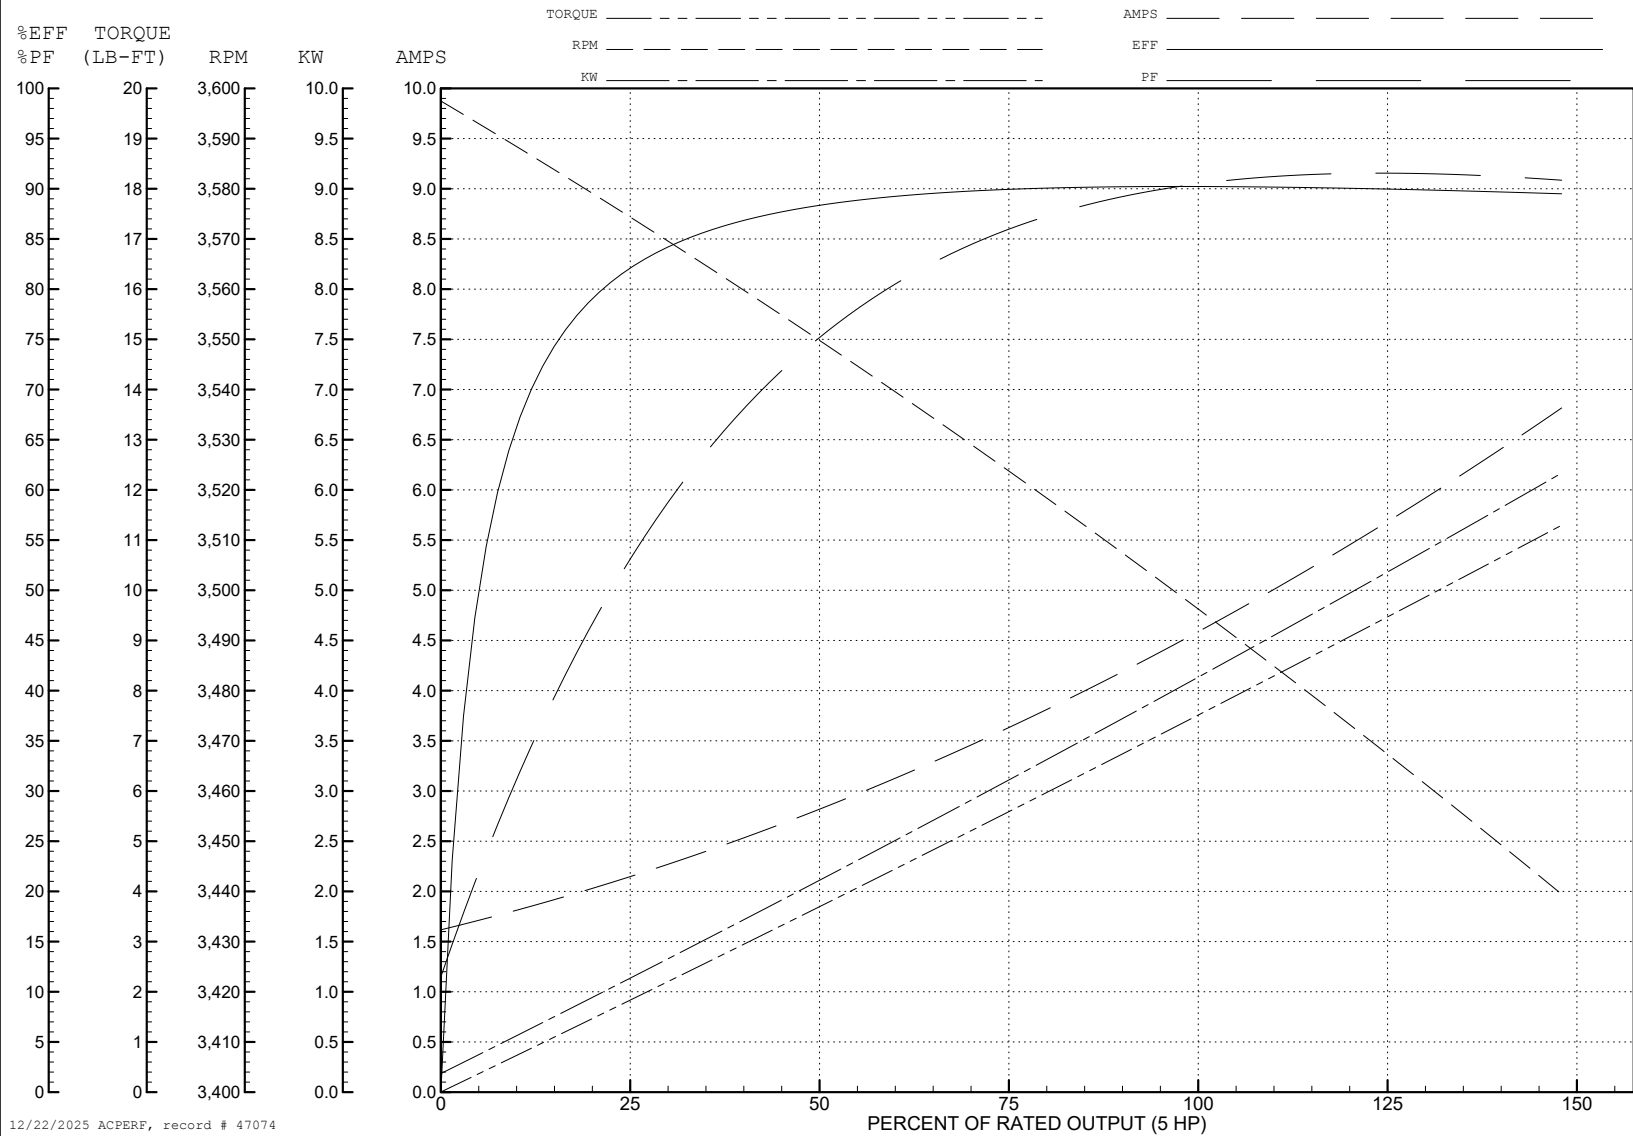

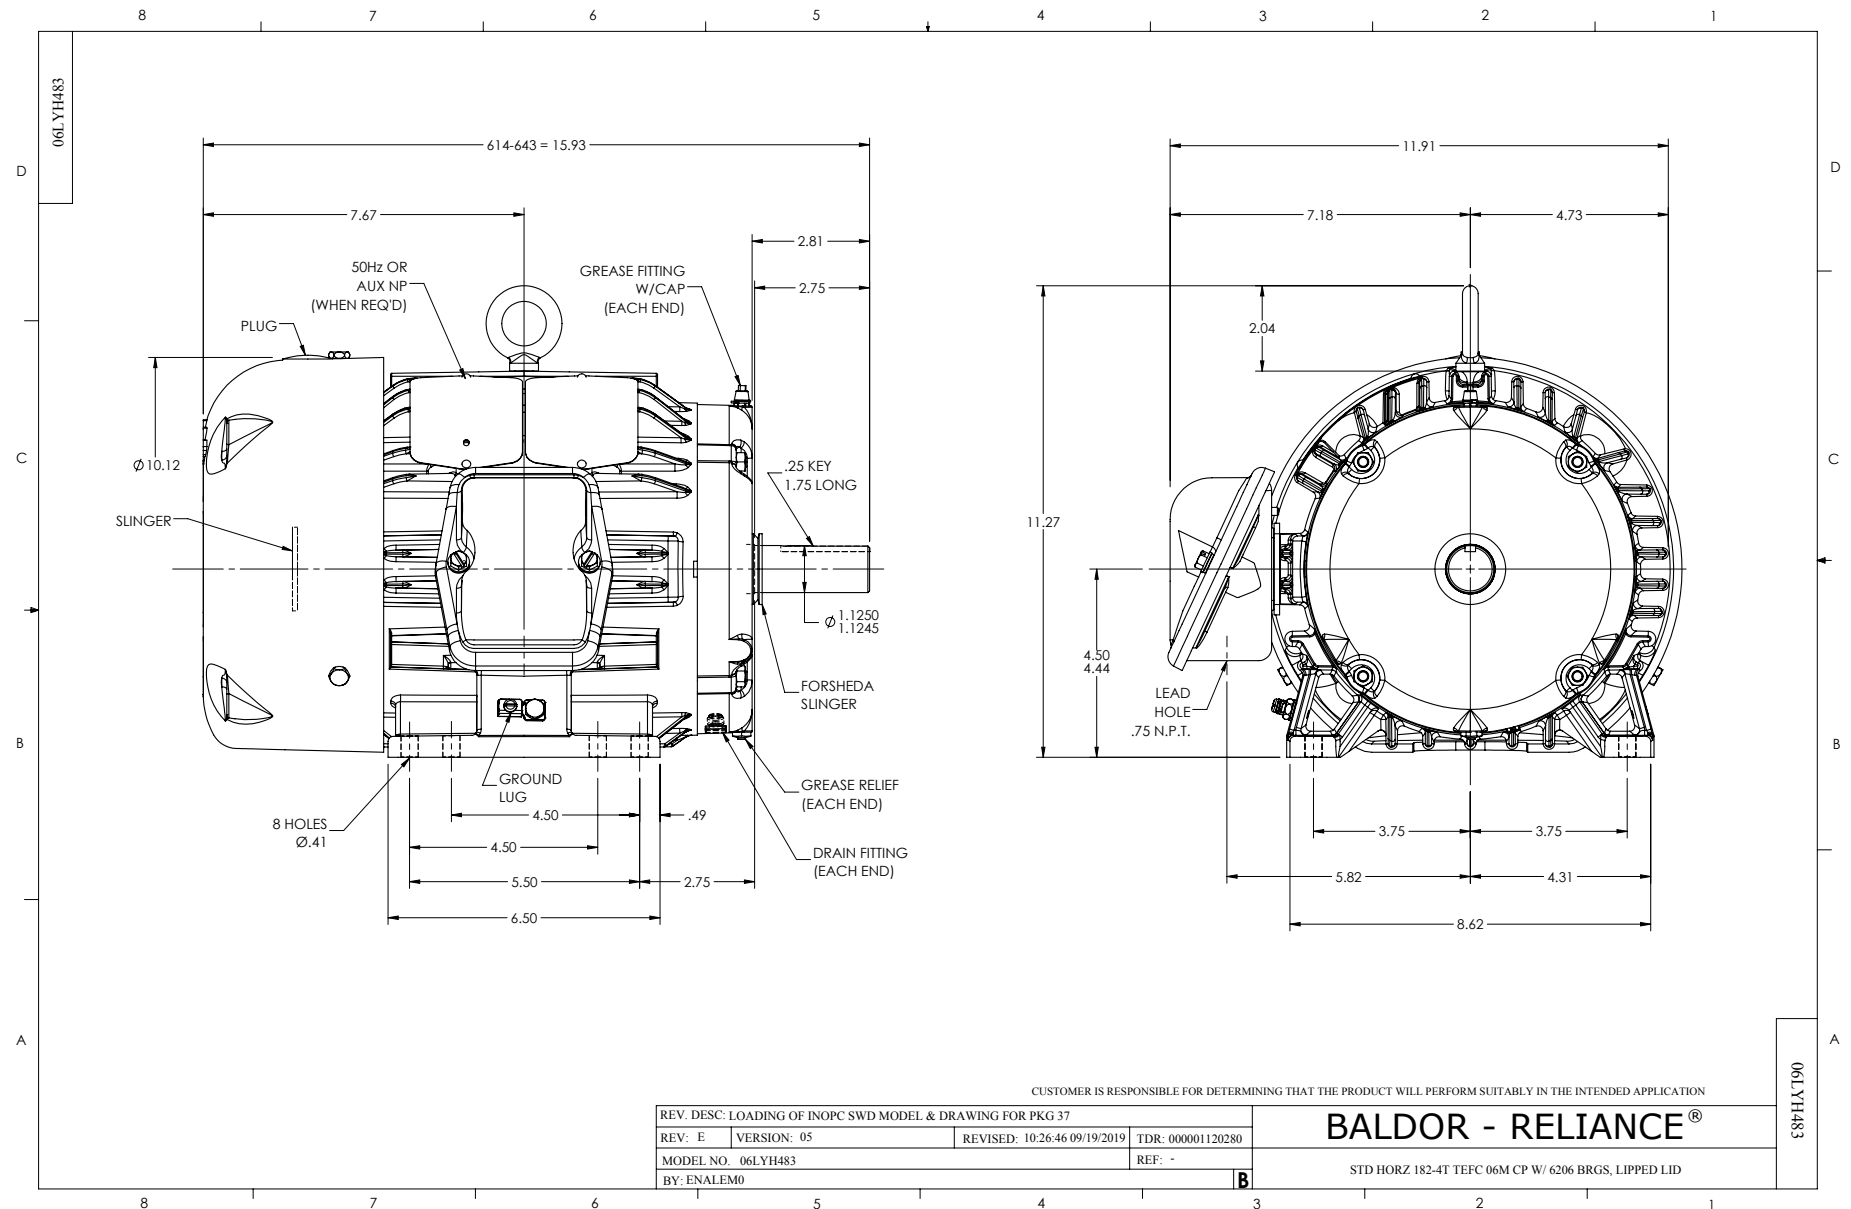

CD0006

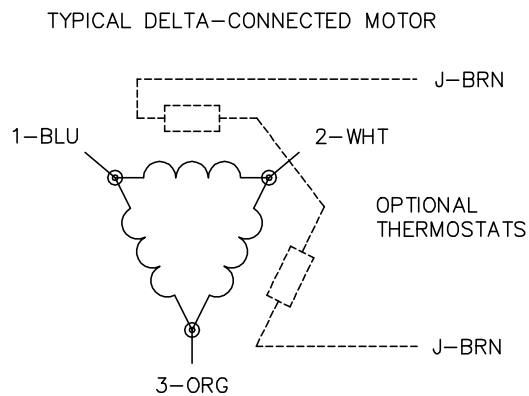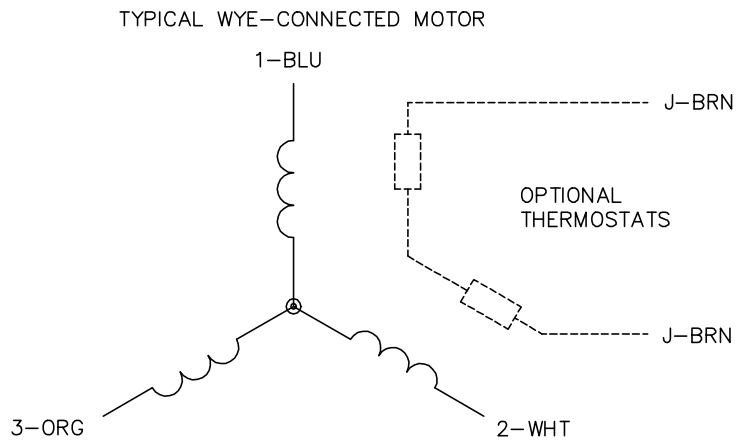

NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007

REV. LTR: E

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\141

REVISED: 10: 24: 49 02/19/2019

BY: ENBRIRO

MTL: -



BALDOR - RELIANCE®

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1