



Customer information packet

ECP4100T-4

15HP, 1175RPM, 3PH, 60HZ, 284T, 1046M, TEFC, F1

Class - CLI GP A,B,C,D

Division - Division II

Specifications

Enclosure	TEFC
Frame	284T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CL I GP A,B,C,D
Haz Area Division	Division II
Motor Letter Type	Three Phase
Output @ Frequency	15.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	CCSA US CSA EEV NEMA PREMIUM NEMA_PREMIUM UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	1.3
Current @ Voltage	21.000 A @ 460.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	91.7 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Haz Area Temp Code	T3C

Part detail

Revision	J
Type	AC
Mech. spec.	10H292
Base	
Status	PRD/A
Elec. spec.	10WGY866
Layout	10LYH292
Eff. date	09-29-2025
CD Diagram	CD0006
Poles	06
Leads	3#10
Proprietary	False
Created date	05-29-2018

Heater Indicator	No Heater
High Voltage Full Load Amps	21.0 a
Insulation Class	F
Inverter Code	Inverter Duty
KVA Code	H
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	1800 rpm
Motor Lead Quantity/Wire Size	3 @ 10 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	1046M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	28.00 IN
Power Factor	73
Product Family	Super-E Chemical Processing
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS NON-COMPLIANT
Service Factor	1.15
Shaft Diameter	1.875 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1175 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None

Winding Thermal 2

None

Nameplate

NP3241

CAT.NO.	ECP4100T-4			P/N		ENCLOSURE			TEFC	
SPEC.	10H292Y866G1		CC	010A	FRAME	284T		S/N		
HP	15			CLASS	F	HZ	60	DES	A	
RPM	1175			RPM MAX	1800		PH	3	KVA-CODE	H
VOLT	460			MOTOR WEIGHT			448			
AMP	21			SER.F.	1.15	PF	73	ODE BRG	6311	DE BRG 6311
RATING	40C AMB-CONT			NEMA-NOM-EFF			91.7	GREASE	POLYREX EM	
							INV.TYPE	PWM		
TEMP CODE	T3C		INVERTER-TEMP-CODE		180					
TEMP =	160	C HP FR	60	C HP TO	90					
CT HZ FROM	1.3	CT HZ TO		60						
HTR-VOLTS	HTR-AMPS		HTR-WATTS		MAX. SPACE HEATER TEMP.			VT HZ FROM O		VT HZ TO 60

Accessories

Part number	Description	Multiplier
10-1305	C FACE KIT	A8

AC Induction Motor Performance Data

Record # 70999

Typical performance - not guaranteed values

Winding: 10WGY866-R012			Type: 1046M		Enclosure: TEFC		
Nameplate Data			460 V, 60 Hz: Single Voltage Motor				
Rated Output (HP)		15	Full Load Torque		66.68 LB-FT		
Volts		460	Start Configuration		direct on line		
Full Load Amps		21	Breakdown Torque		213 LB-FT		
R.P.M.		1175	Pull-up Torque		93.1 LB-FT		
Hz	60	Phase	3	Locked-rotor Torque		114 LB-FT	
NEMA Design Code		A	KVA Code	H	Starting Current		144 A
Service Factor (S.F.)		1.15	No-load Current		12.4 A		
NEMA Nom. Eff.		91.7	Power Factor	73	Line-line Res. @ 25°C		0.502 Ω
Rating - Duty		40C	AMB-CONT		Temp. Rise @ Rated Load		43°C
S.F. Amps					Temp. Rise @ S.F. Load		51°C
					Locked-rotor Power Factor		32.9
					Rotor inertia		5.63 LB-FT ²

Load Characteristics 460 V, 60 Hz, 15 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	32	52	65	72	76	78	75
Efficiency	83	89.4	91.3	91.7	91.4	90.8	91.7
Speed	1196	1193	1189	1185	1181	1177	1181
Line amperes	13.2	15.1	17.9	21.3	25.3	29.6	23.4


ABB Motors and Mechanical Inc.


WINDING # 10WGY866

Typical performance - not guaranteed values.




15 HP 3 PH 60 HZ 1175 RPM 460 V 1046M

TORQUES (LB-FT): PO=213 PU=93.1 LR=114 LRA=144

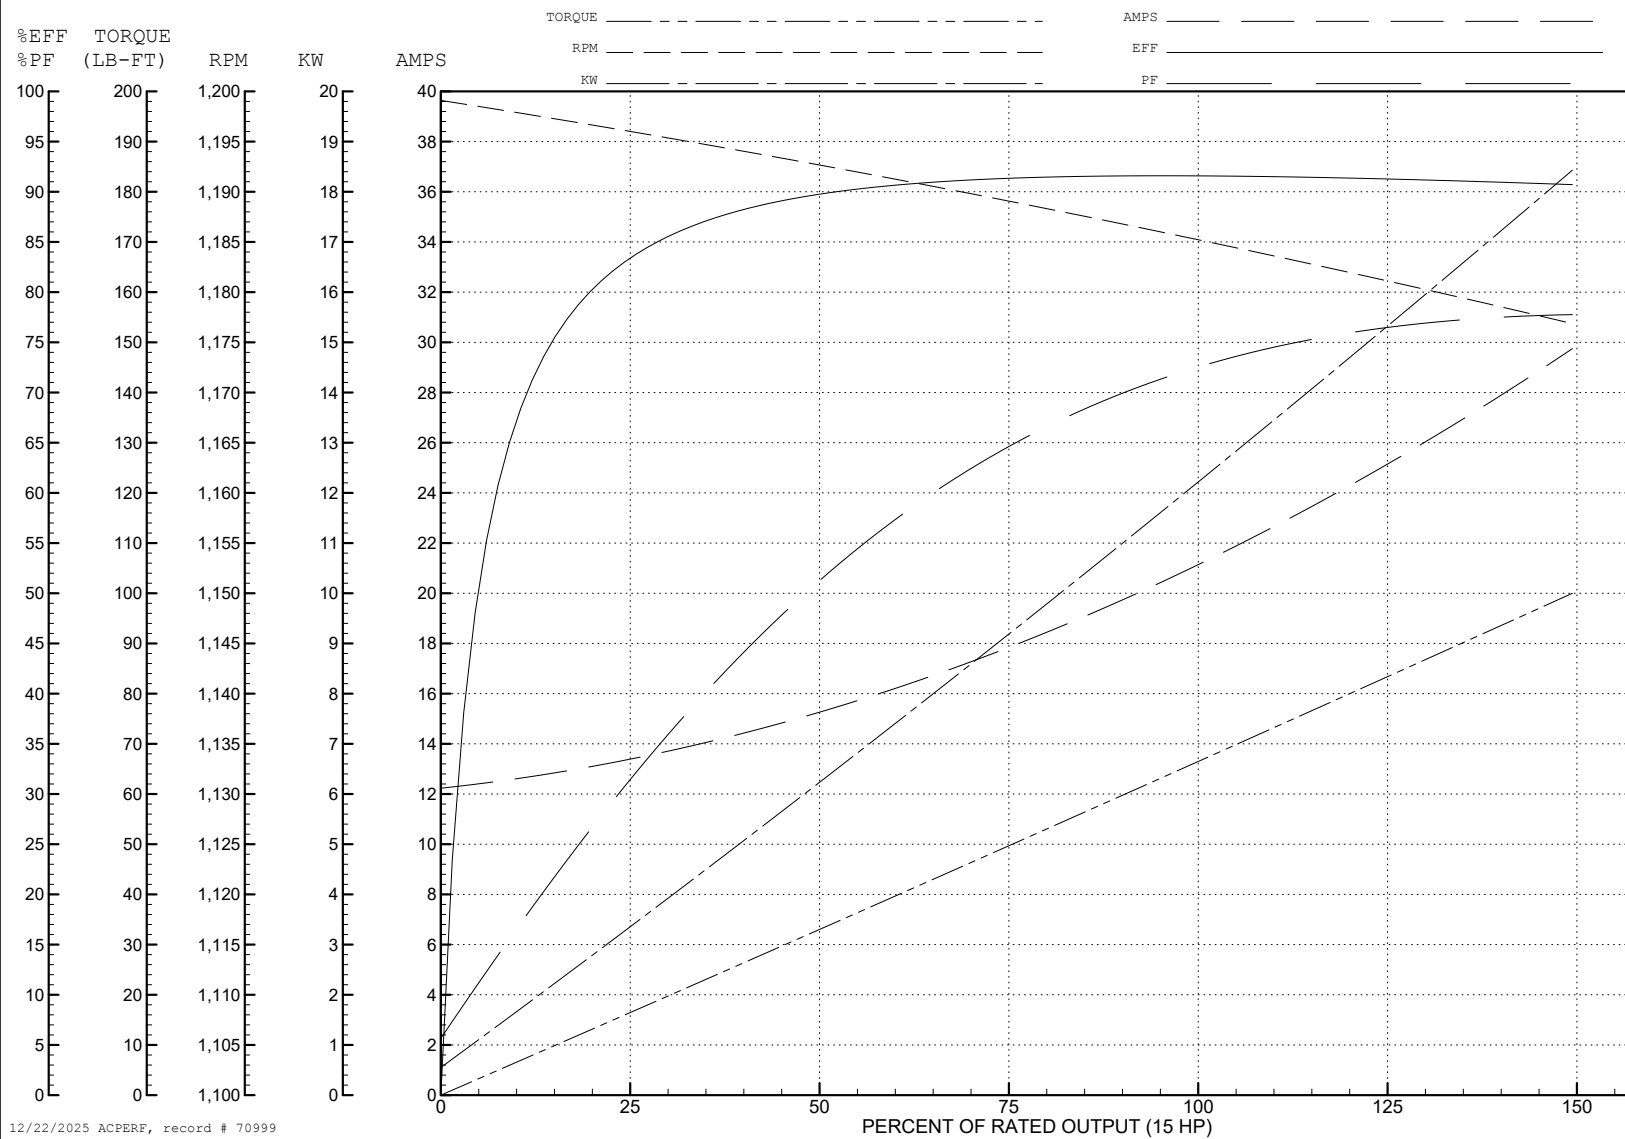

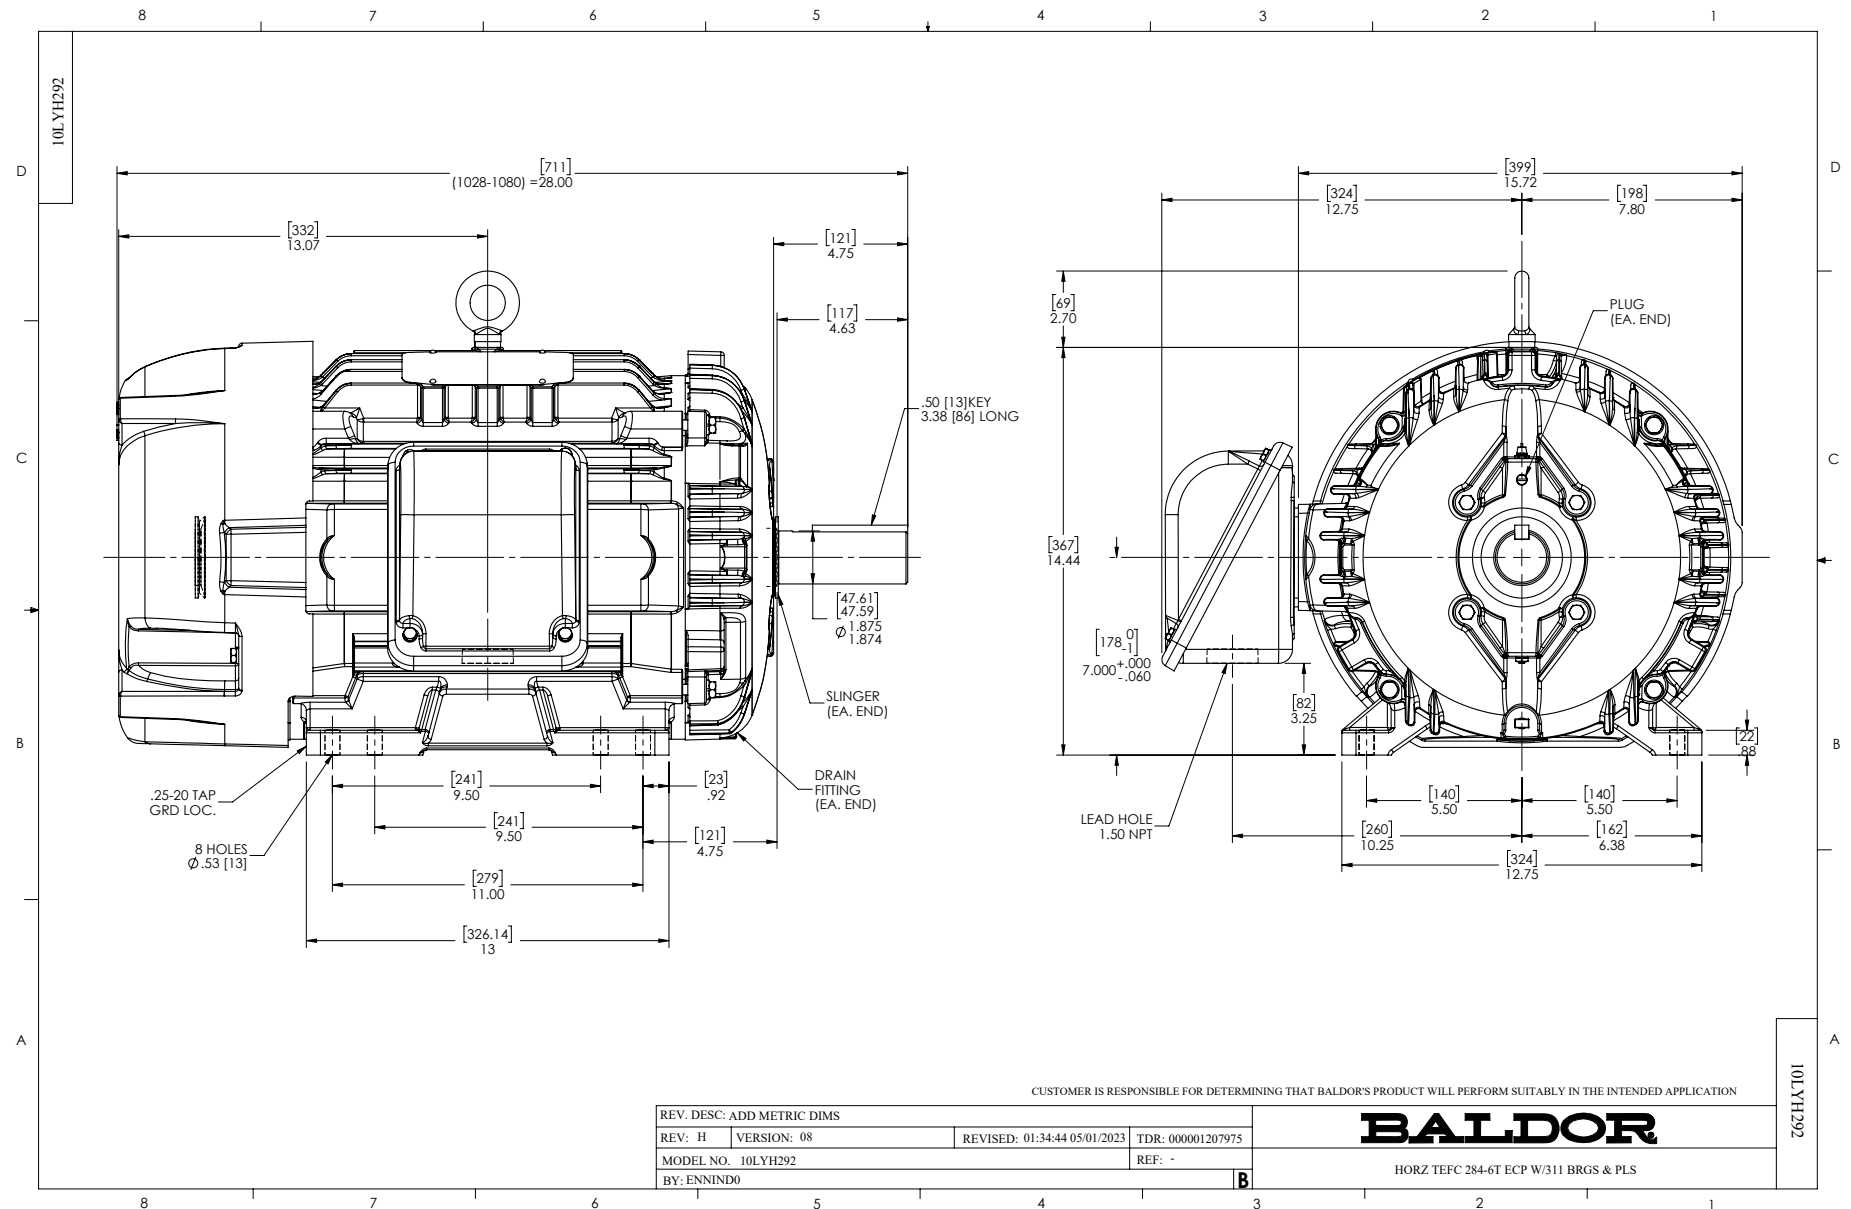

CD0006

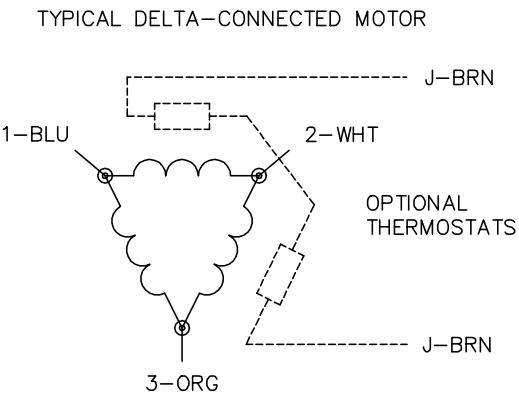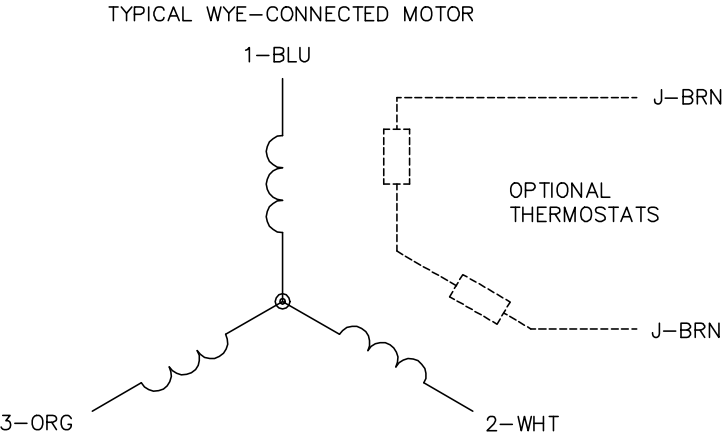

- NOTES:
- 1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
 - 2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
 - 3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
 - 4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
 - 5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007		
REV. LTR: E	VERSION: 01	TDR: 000001099922
FILE: \AAA\00005\141	REVISED: 10: 24: 49 02/19/2019	BY: ENBRIRO
MTL: —		

BALDOR - RELIANCE®

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1