



Customer information packet

ECP4106T-4

20HP, 3540RPM, 3PH, 60HZ, 256T, 0944M, TEFC, F1

Class - CLI GP A,B,C,D

Division - Division II

Specifications

Enclosure	TEFC
Frame	256T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CL I GP A,B,C,D
Haz Area Division	Division II
Motor Letter Type	Three Phase
Output @ Frequency	20.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	CSA EEV NEMA PREMIUM NEMA_PREMIUM UR CCSA US
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	6
Current @ Voltage	23.000 A @ 460.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	92.4 %
Electrically Isolated Bearing	Not Electrically Isolated
Enclosure Modification	Severe Duty Features
Feedback Device	NO FEEDBACK
Front Face Code	Standard

Part detail

Revision	AX
Type	AC
Mech. spec.	09J371
Base	
Status	PRD/A
Elec. spec.	09WGY640
Layout	09LYJ371
Eff. date	09-12-2024
CD Diagram	CD0006
Poles	02
Leads	3#10
Proprietary	False
Created date	08-29-2010

Front Shaft Indicator	None
Haz Area Temp Code	T3
Heater Indicator	No Heater
High Voltage Full Load Amps	23.0 a
Insulation Class	F
Inverter Code	Inverter Duty
KVA Code	J
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	5400 rpm
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	3 @ 10 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0944M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	24.78 IN
Power Factor	89
Product Family	Super-E Chemical Processing
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	3540 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None

Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3995ABBL																					
CAT #		ECP4106T-4				SER						CC		010A							
SPEC		09J371Y640G1				RATING		40C AMB-CONT													
HZ		VOLTS				AMPS		RPM		HP		CODE		SF		DES		PF		NEMA NOM. EFF	
60		460				23		3540		20		J		1.15		A		89		% %	
PH		3	CL		F	MAX RPM		5400	MAX CORR KVAR				USABLE AT 208V				N/A				
IP55		FR		256T		ENCL		TEFC		DE BRG		6309		ODE BRG		6309					
GREASE		POLYREX EM										MTR WT		328		LBS					
USABLE AT		50HZ 15HP 380V 21A																			
CL I DIV 2 GRPS A,B,C,D								CL I ZONE 2 GRPS				IIA,IIB,IIC				TEMP T		200	C		
1.0 SF ON PWM INVERTER								POWER		INV TEMP CL		200	C								
CHP		60-90		HZ		1.5:1		CT	6-60		HZ		10:1		VT	3-60		HZ		20:1	
SPACE HEATER LEADS H1-H2:								TIE LIKE NUMBERS				TOGETHER									
V				A				W				MAX SPACE HEATER TEMP									

Accessories

Part number	Description	Multiplier
09-1309	C FACE KIT	A8

AC Induction Motor Performance Data

Record # 47269

Typical performance - not guaranteed values

Winding: 09WGY640-R019			Type: 0944M		Enclosure: TEFC			
Nameplate Data			460 V, 60 Hz: Single Voltage Motor					
Rated Output (HP)		20	Full Load Torque		29.7 LB-FT			
Volts		460	Start Configuration		direct on line			
Full Load Amps		23	Breakdown Torque		159 LB-FT			
R.P.M.		3540	Pull-up Torque		51 LB-FT			
Hz	60	Phase	3	Locked-rotor Torque		74 LB-FT		
NEMA Design Code		A	KVA Code	J	Starting Current		201 A	
Service Factor (S.F.)		1.15	No-load Current		8.4 A			
NEMA Nom. Eff.		92.4	Power Factor		89	Line-line Res. @ 25°C		0.313 Ω
Rating - Duty		40C	AMB-CONT		Temp. Rise @ Rated Load		62°C	
S.F. Amps			Temp. Rise @ S.F. Load		75°C			
			Locked-rotor Power Factor		28			
			Rotor inertia		1.12 lb-ft²			

Load Characteristics 460 V, 60 Hz, 20 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	56	75	86	89	91	91	90
Efficiency	85.5	91.1	92.3	92.4	92	91.2	92.2
Speed	3585	3570	3557	3542	3527	3510	3533
Line amperes	10	13.8	17.8	22.9	28	33.5	26


ABB Motors and Mechanical Inc.


WINDING # 09WGY640

Typical performance - not guaranteed values.




20 HP 3 PH 60 HZ 3540 RPM 460 V 0944M

TORQUES (LB-FT): PO=159 PU=51 LR=74 LRA=201

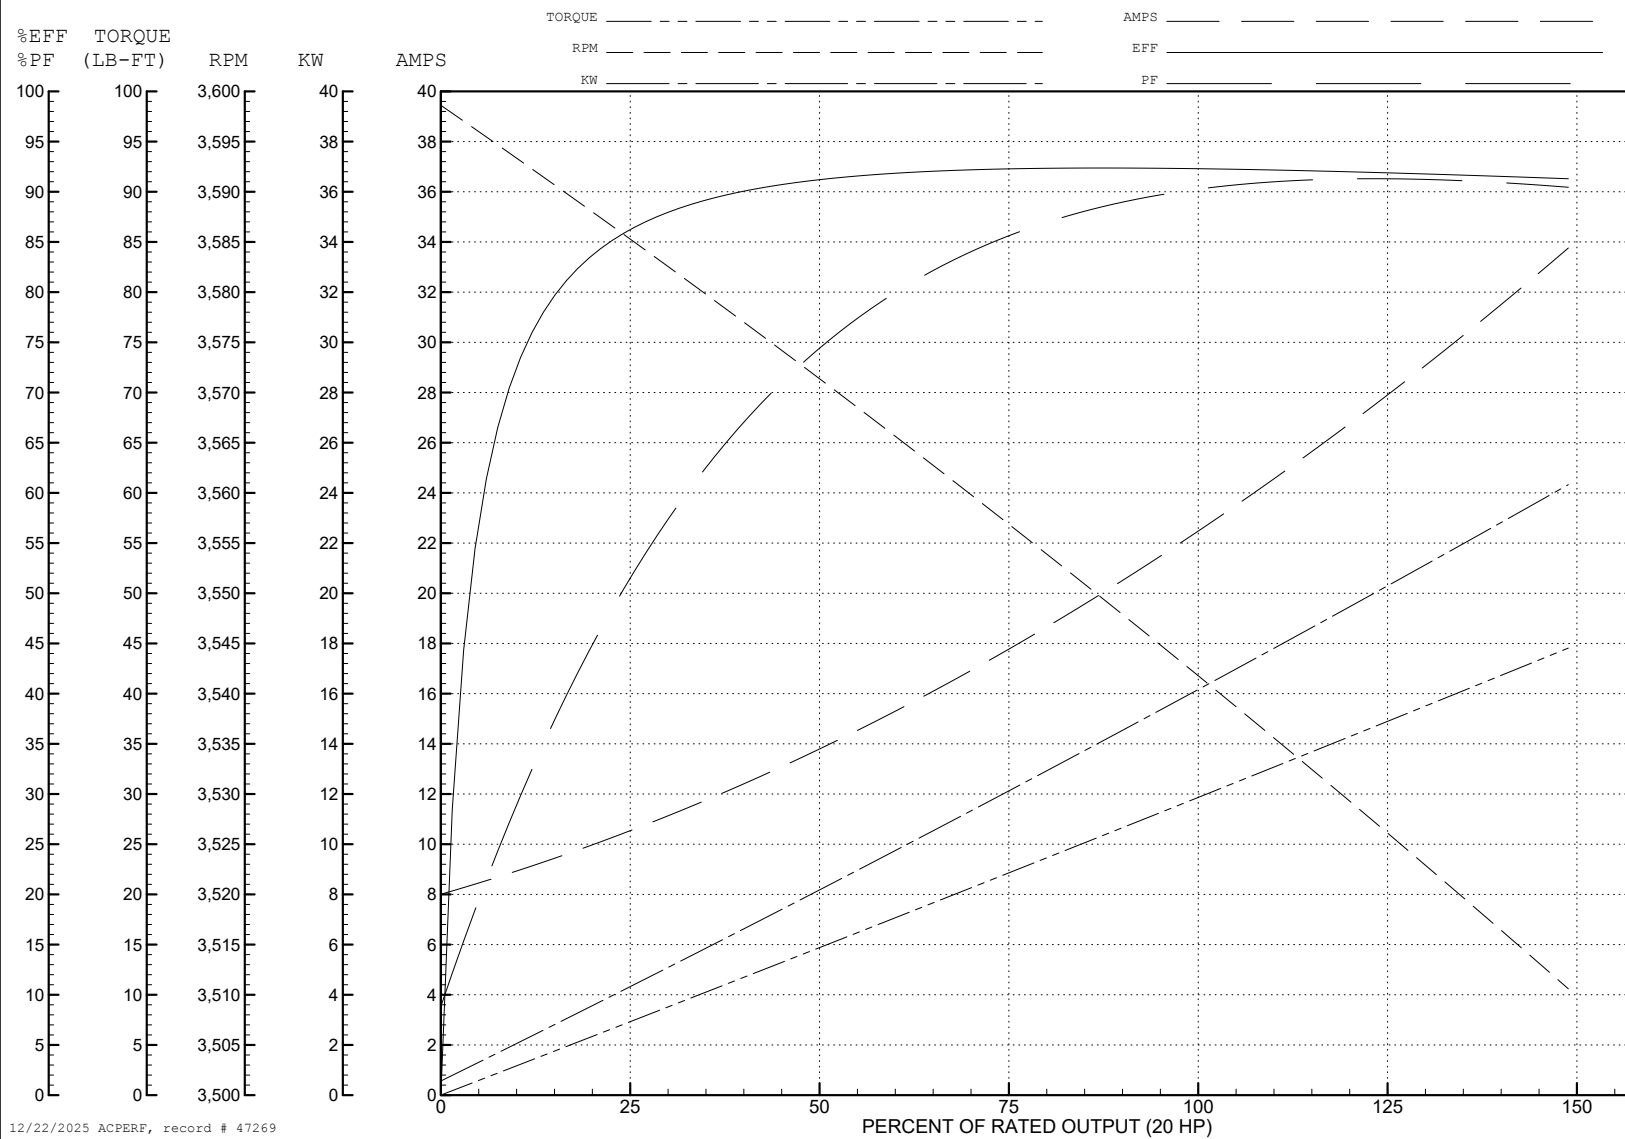

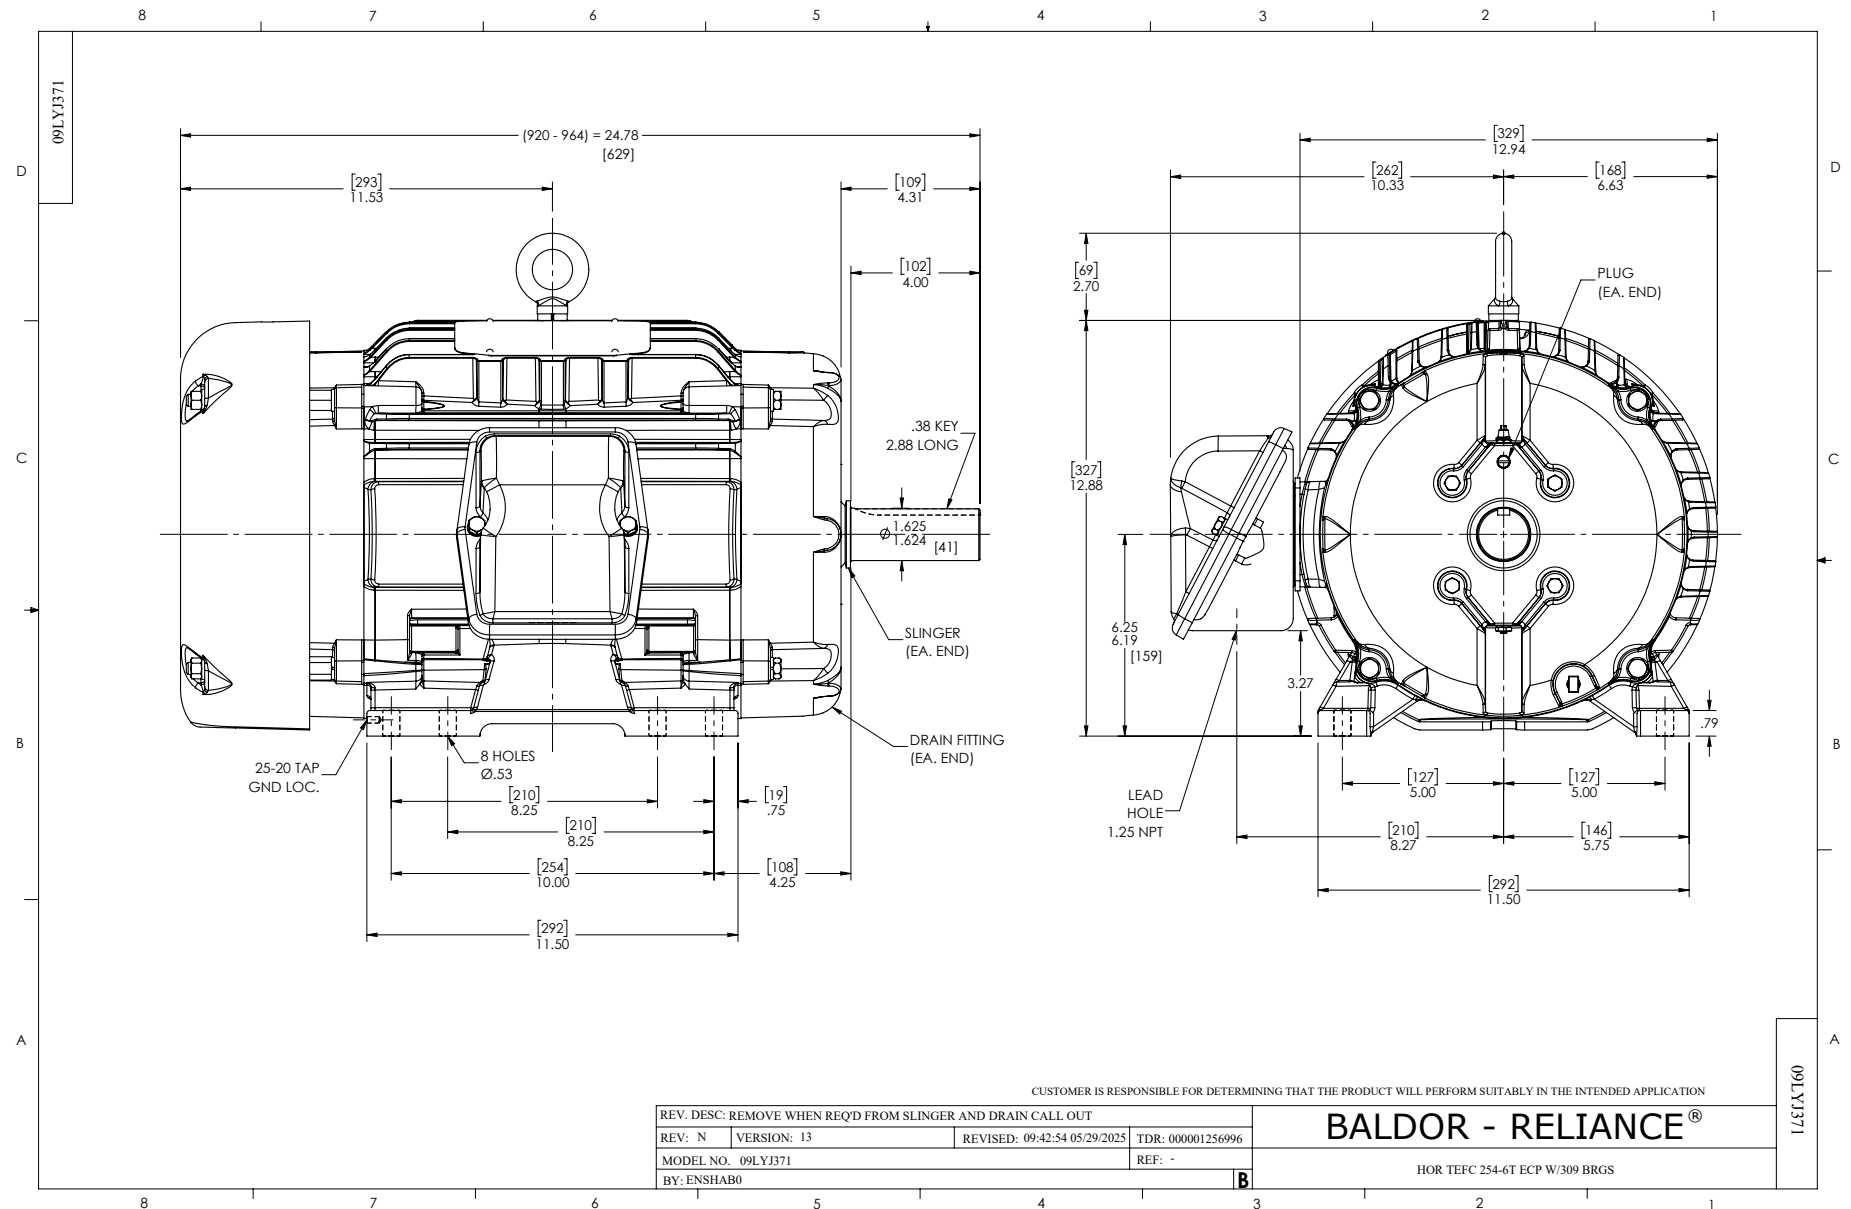

CD0006

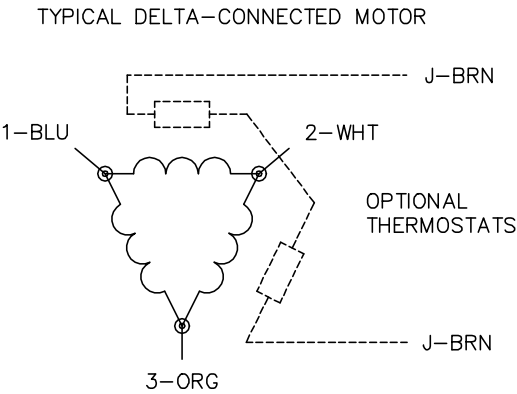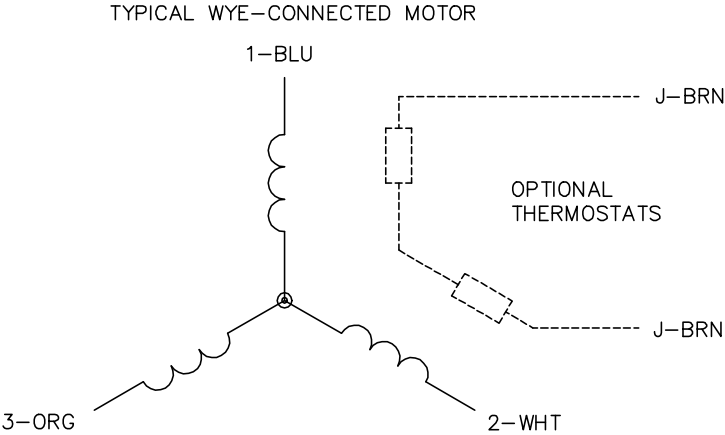

- NOTES:
- 1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
 - 2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
 - 3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
 - 4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
 - 5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007		
REV. LTR: E	VERSION: 01	TDR: 000001099922
FILE: \AAA\00005\141	REVISED: 10: 24: 49 02/19/2019	BY: ENBRIRO
MTL: —		

BALDOR - RELIANCE®

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1