



Customer information packet

ECP4313T-5

75HP, 3555RPM, 3PH, 60HZ, 365TS, TEFC, F1

Class - None

Division - Division II

Specifications

Enclosure	TEFC
Frame	365TS
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Division II
Motor Letter Type	Three Phase
Output @ Frequency	75.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	575.0 V @ 60 HZ
Agency Approvals	CCSAUSEEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Constant Torque Speed Range	10-60
Current @ Voltage	65.500 A @ 575.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	93.6 %
Enclosure Modification	Severe Duty Features
Feedback Device	NO FEEDBACK
Haz Area Temp Code	T3
Heater Indicator	No Heater
High Voltage Full Load Amps	65.5 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	F
Lifting Lugs	Standard Lifting Lugs
Motor Lead Quantity/Wire Size	3 @ 4 AWG

Part detail

Revision	D
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	A36WG1546
Layout	617428-298
Eff. date	10-24-2024
CD Diagram	416820-036
Poles	02
Leads	3#4
Proprietary	False
Created date	10-01-2019

Motor Standards	NEMA
Motor Type	A36068M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	31.35 IN
Power Factor	92
Product Family	General Industrial
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Service Factor	1.15
Shaft Diameter	1.875 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	3555 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None

Nameplate


NP2496L	
MOBIL POLYREX EM	

000901002AAA	
IP55 CONSTRUCTION	


NP3238


CAT NO	ECP4313T-5			SPEC NO.	A36-7806-1546															
HP	75	AMPS	65.5		VOLTS	575		DESIGN	B											
FRAME	365TS	RPM	3555	HZ	60	AMB	40	SF	1.15											
D.E. BRG.DATA	6313			O.D.E. BRG.DATA	6313			PH	3	DUTY	CONT	INSUL.CLASS	F							
D.E. BRG.	65BC03J30X			TYPE	P	ENCL	TEFC	CODE	F											
O.D.E. BRG.	65BC03J30X			POWER FACTOR	92			NEMA NOM EFFICIENCY				93.6								
3/4 LOAD EFF.	93.8			MAX CORR KVAR	6.5			GUARANTEED EFFICIENCY				92.4								
TEMP CODE	T3	TEMP =	200																	
CHP HZ	60-75	CT HZ	10-60		VT HZ	0-60														
INVERTER-TEMP-CODE	T3																			
SER.NO.				MOTOR WEIGHT																

Printed on 1/22/21 8:40 @ bengap01.ba1

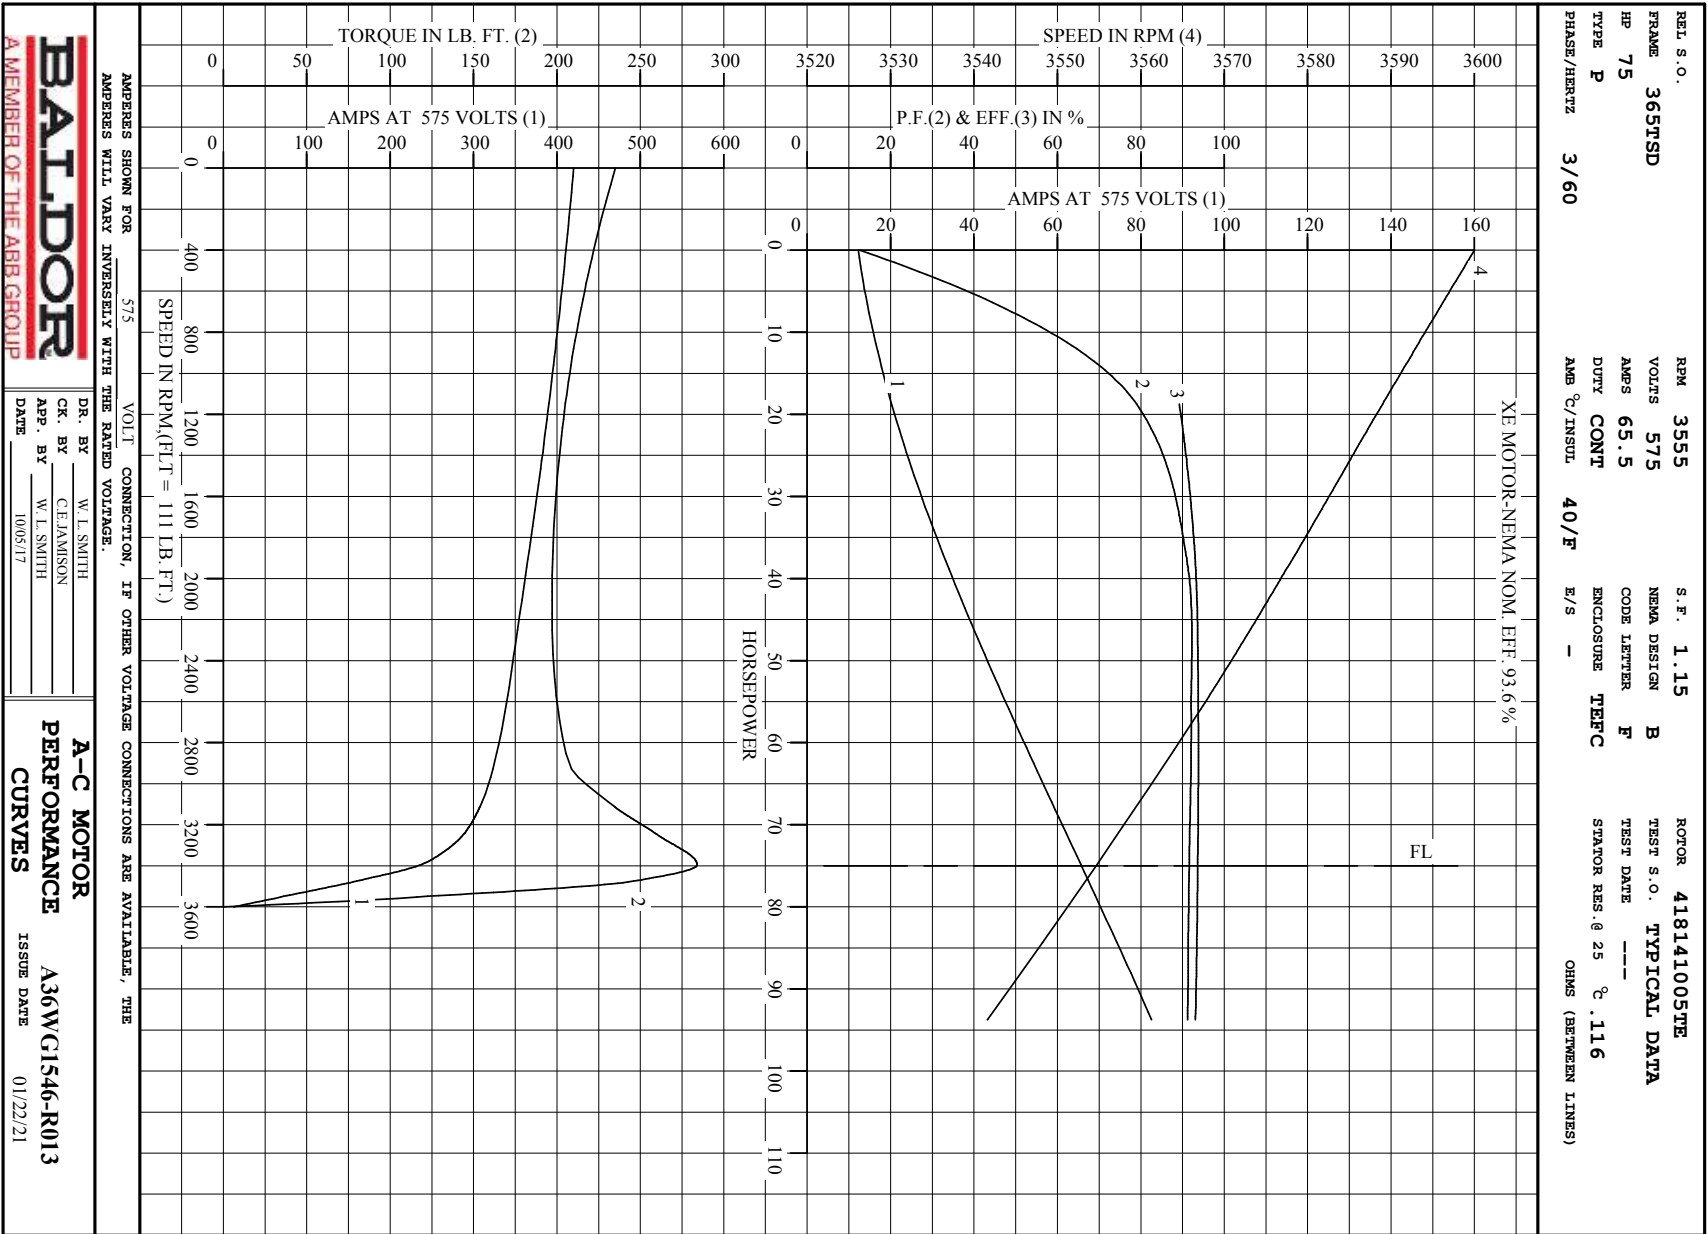


Printed on 1/22/21 8:40 @ bengap01.ba1

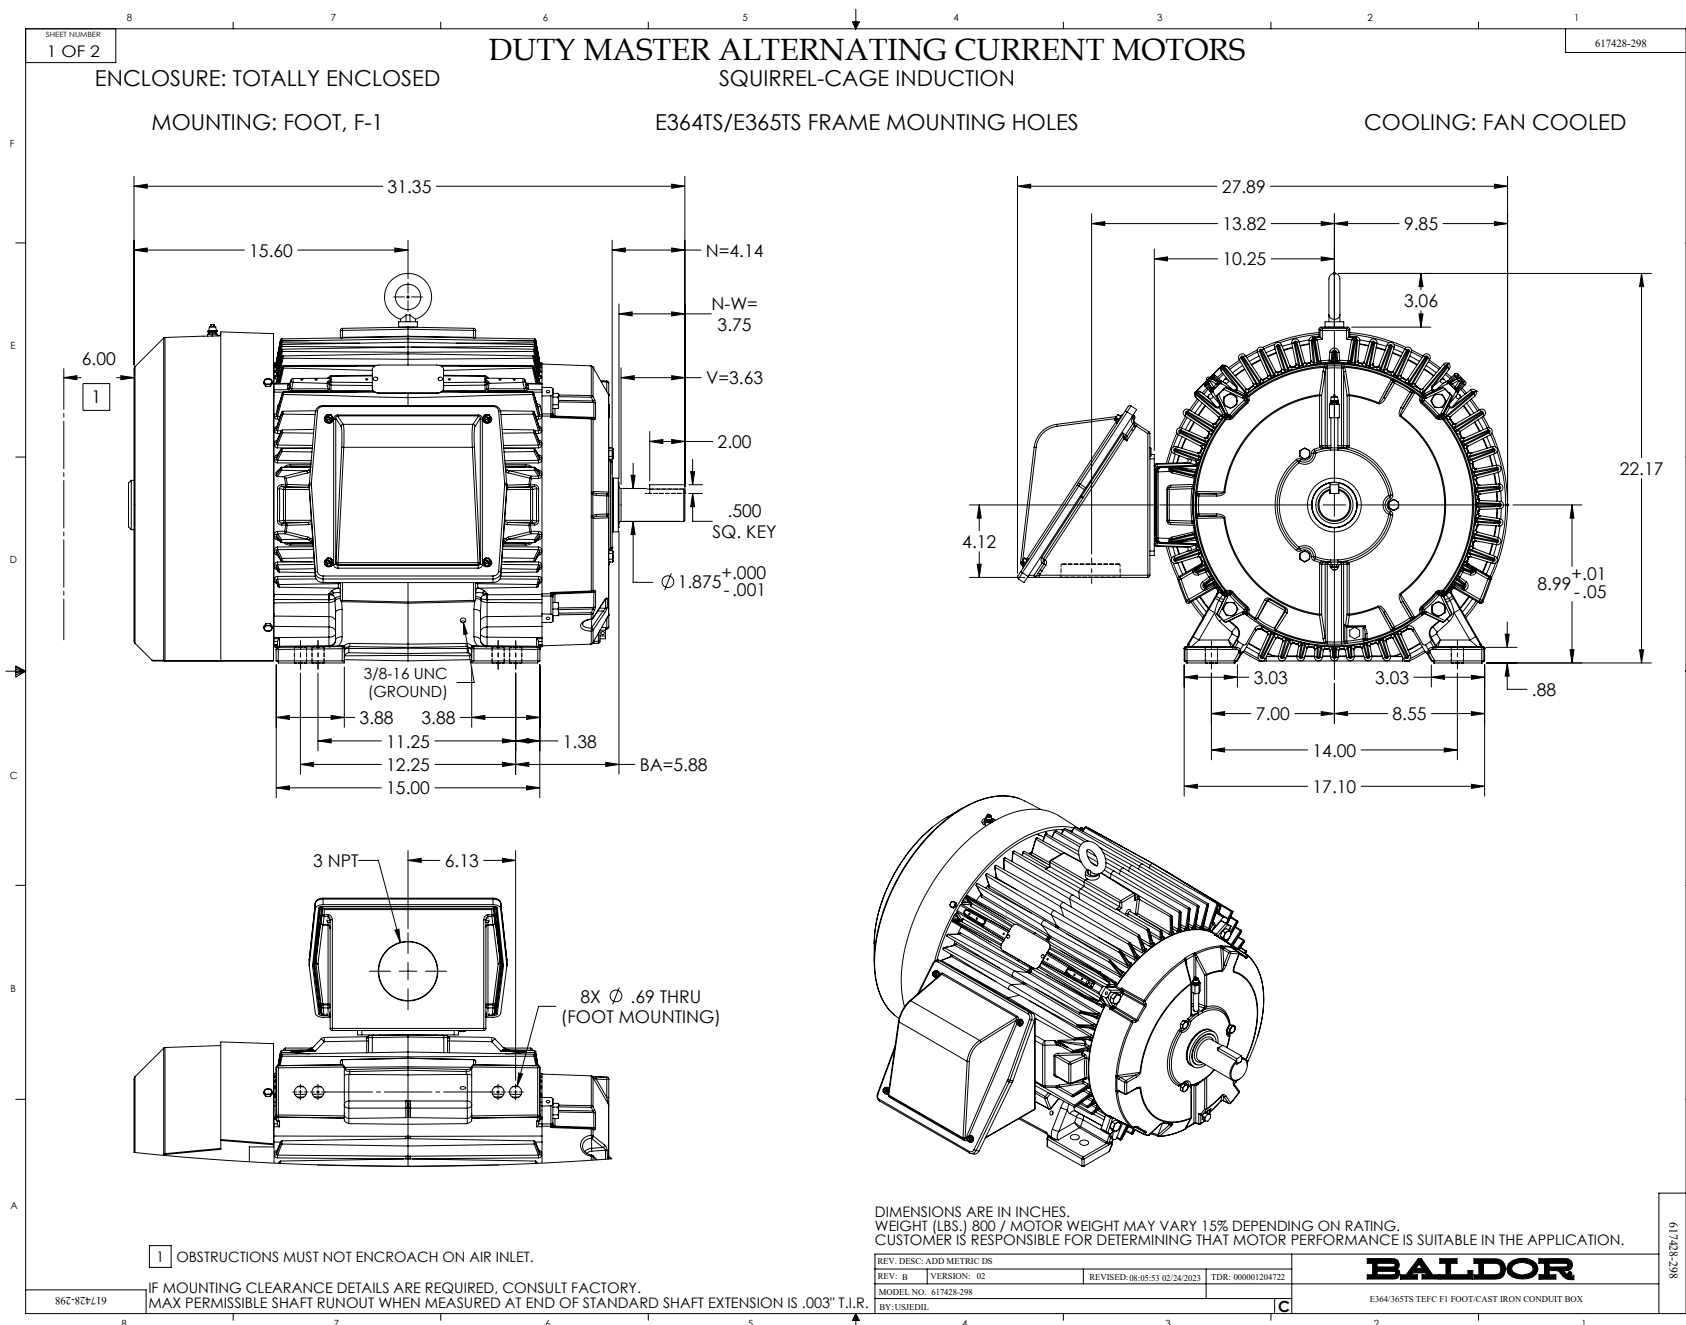

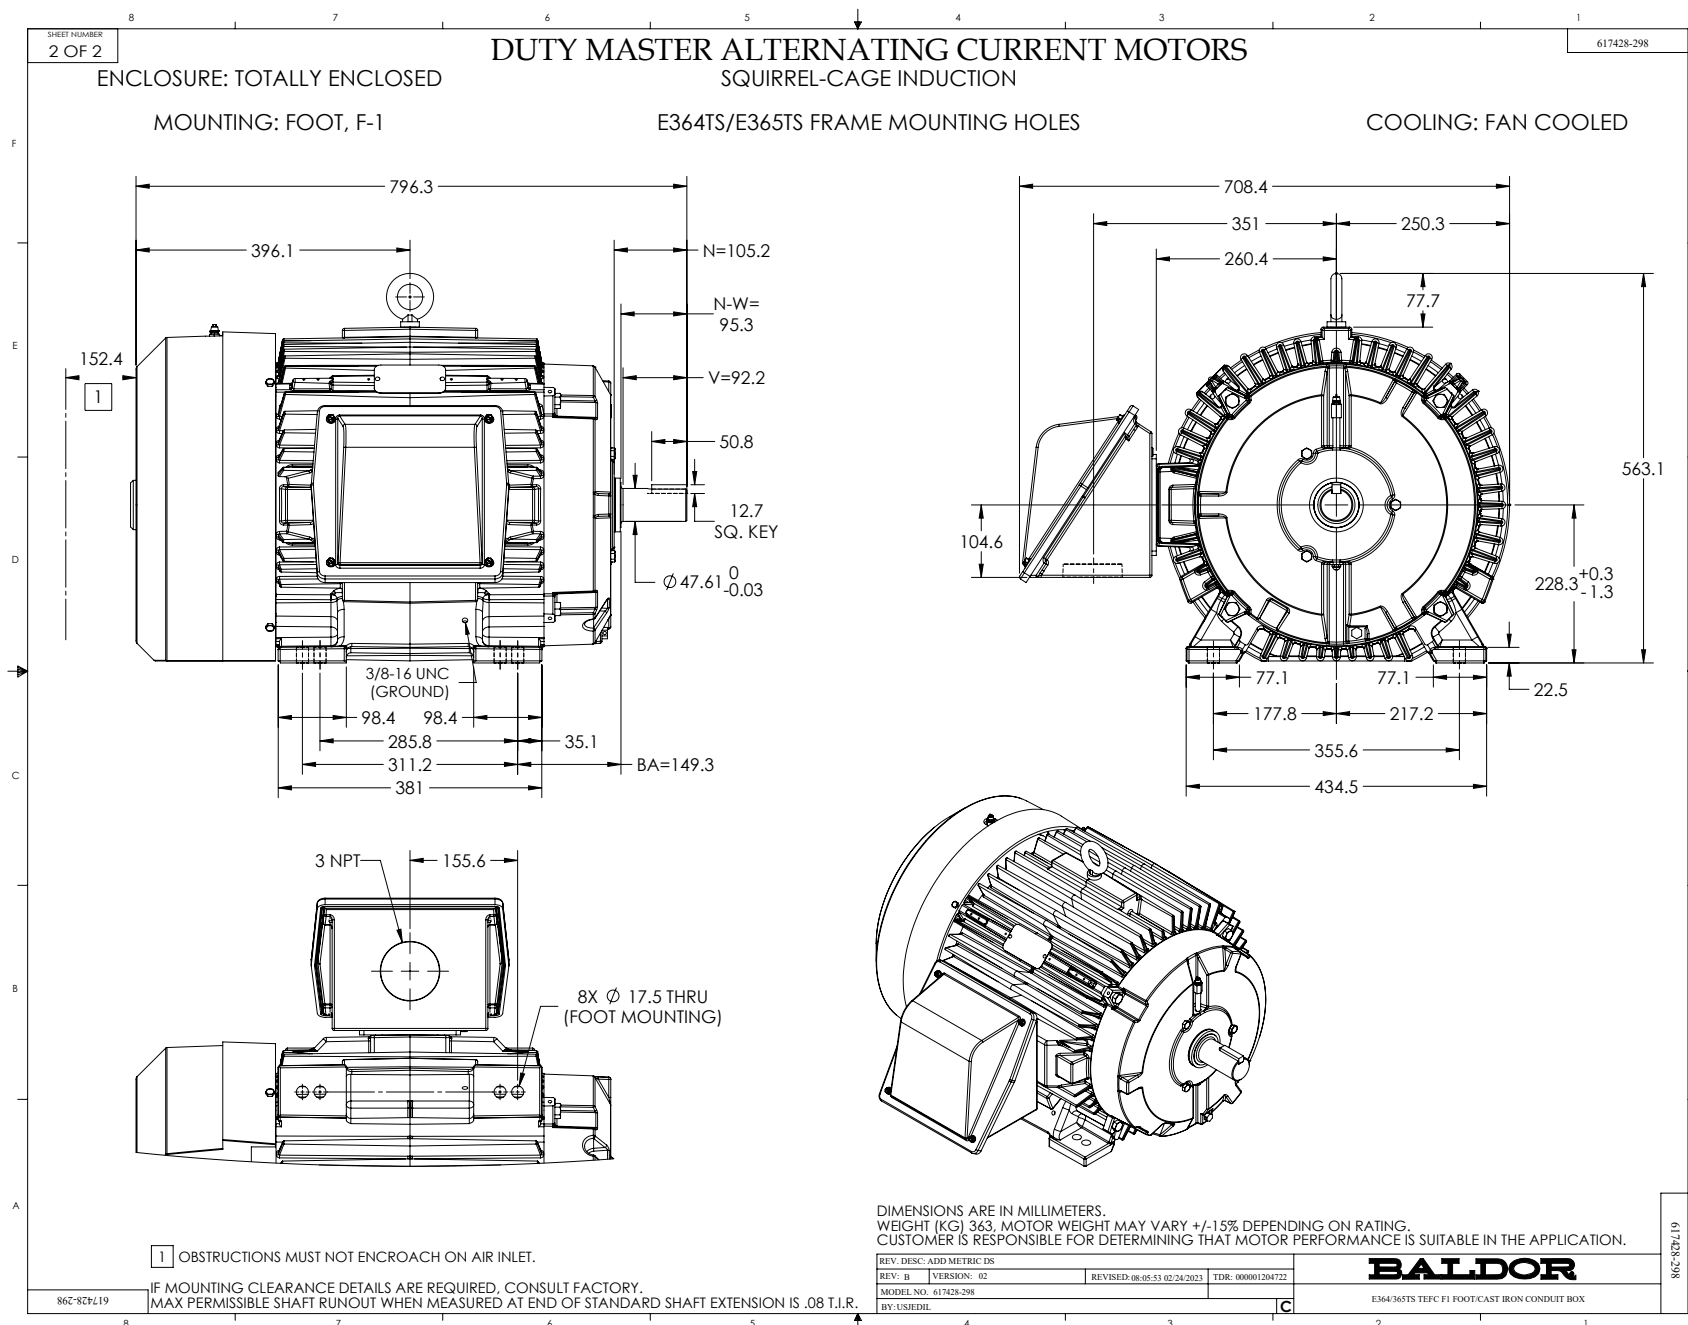

416820-036

A-C MOTOR
CONNECTION DIAGRAM
STANDARD 3 LEAD CONNECTED

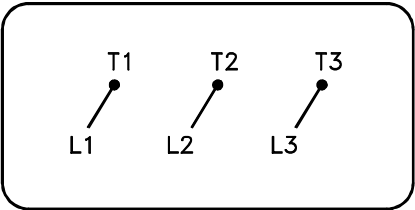

(N.P. 1575-BA)

416820-036

REV. DESC: LOADED TO BUS, C/R 335225

REV. LTR: -

VERSION: 00

TDR: 000000538207

FILE: \MGA\00000\682

REVISED: 11: 54: 06 04/30/2010

MTL: -

BY: RAGRA

BALDOR

CONN DIAG - STANDARD 3 LEAD

SH 1 of 1