



Customer information packet

ECP4316T-4

75HP, 1780RPM, 3PH, 60HZ, 365T, A36070M, TEFC

Class - CLI GP A,B,C,D

Division - Division II

Specifications

Enclosure	TEFC
Frame	365T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CL I GP A,B,C,D
Haz Area Division	Division II
Motor Letter Type	Three Phase
Output @ Frequency	75.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	CCSAUSEEV NEMA PREMIUM NEMA_PREMIUM UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Constant Torque Speed Range	30-60
Current @ Voltage	86.000 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	95.4 %
Enclosure Modification	Severe Duty Features
Feedback Device	NO FEEDBACK
Haz Area Temp Code	T3
Heater Indicator	No Heater
High Voltage Full Load Amps	86.0 a
Insulation Class	F
Inverter Code	Inverter Ready

Part detail

Revision	N
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	A36WG3963
Layout	617428-034
Eff. date	02-13-2025
CD Diagram	416820-036
Poles	04
Leads	3#4 Y
Proprietary	False
Created date	05-16-2019

IP Rating	IP55
KVA Code	G
Lifting Lugs	Standard Lifting Lugs
Max Speed	2700 rpm
Motor Lead Quantity/Wire Size	3 @ 4 AWG
Motor Standards	NEMA
Motor Type	A36070M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	33.49 IN
Power Factor	86
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Service Factor	1.15
Shaft Diameter	2.375 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1780 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None

Nameplate

NP4033LUA																			
CAT #		ECP4316T-4				SER					CC		010A						
SPEC		A36-1114-3963				RATING		40C AMB-CONT											
HZ		VOLTS		AMPS		RPM		HP		CODE		SF		DES		PF		NEMA NOM. EFF	
60		460		86		1780		75		G		1.15		B		86		% 95.4 %	
																		% %	
PH		3	CL	F	MAX RPM		2700		MAX CORR KVAR			15.8							
BRG		DE	6313		ODE	6313		ENCL	TEFC		FR	365T		IP	55				
GREASE		POLYREX EM									MTR WT			966		LBS			
CL I DIV 2 GRPS A,B,C,D					CL I ZONE 2 GRPS					IIA,IIB,IIC					TEMP T		200		C
INV READY		CT	15-60		HZ	4:1		VT	0-60		HZ	1000:1		CHP		60-90		HZ 1.5:1	
INV TEMP CL			200	C	USABLE AT		50HZ 60HP 380V 83.5A SF1.15												

AC induction motor performance data

Record #71698 - Typical performance - not guaranteed values

Winding	A36WG3963
Type	A3670M
Enclosure	TEFC

Nameplate data

Rated Output			75
Volts			460
Full Load Amps			86
R.P.M.			1780
Hz	60	Phase	3
KVA Code			F
S.F.			1.15
NEMA Nom. Eff.	95	Power Factor	86
Duty			CONT
S.F. Amps			

460 V, 60 Hz:

Single Voltage Motor

Full Load Torque	220.2 LB-FT
Start Configuration	direct on line
Breakdown Torque	542 LB-FT
Pull-up Torque	372 LB-FT
Locked-rotor Torque	445 LB-FT
Starting Current	541 A
No-load Current	27.9
Line-line Res. @ 25°C	0.082276 Ω
Temp. Rise @ Rated Load	55°C
Temp. Rise @ S.F. Load	69°C
Locked-rotor Power Factor	31.8
Rotor inertia	16.2 lb-ft ²

Load Characteristics 460 V, 60 Hz, 75 HP


% of Rated Load	NL	25	50	75	100	125	150	SF
Power Factor	3	54	75	83	85	86	85	86
Efficiency	0	94.1	95.9	95.9	95.5	94.9	93.8	95.1
Speed	1798.9	1796.2	1792.2	1788	1783.5	1778.5	1771.1	1780
Line amperes	27.9	34.1	48.5	66.3	85.9	108	136	99.2


REVIEW

WINDING # A36WG3963

75 HP 3 PH 60 HZ 1780 RPM 460 V A3670M


TORQUES (LB-FT): P0=542.00 PU=372.00 LR=445.00 LRA=541.00

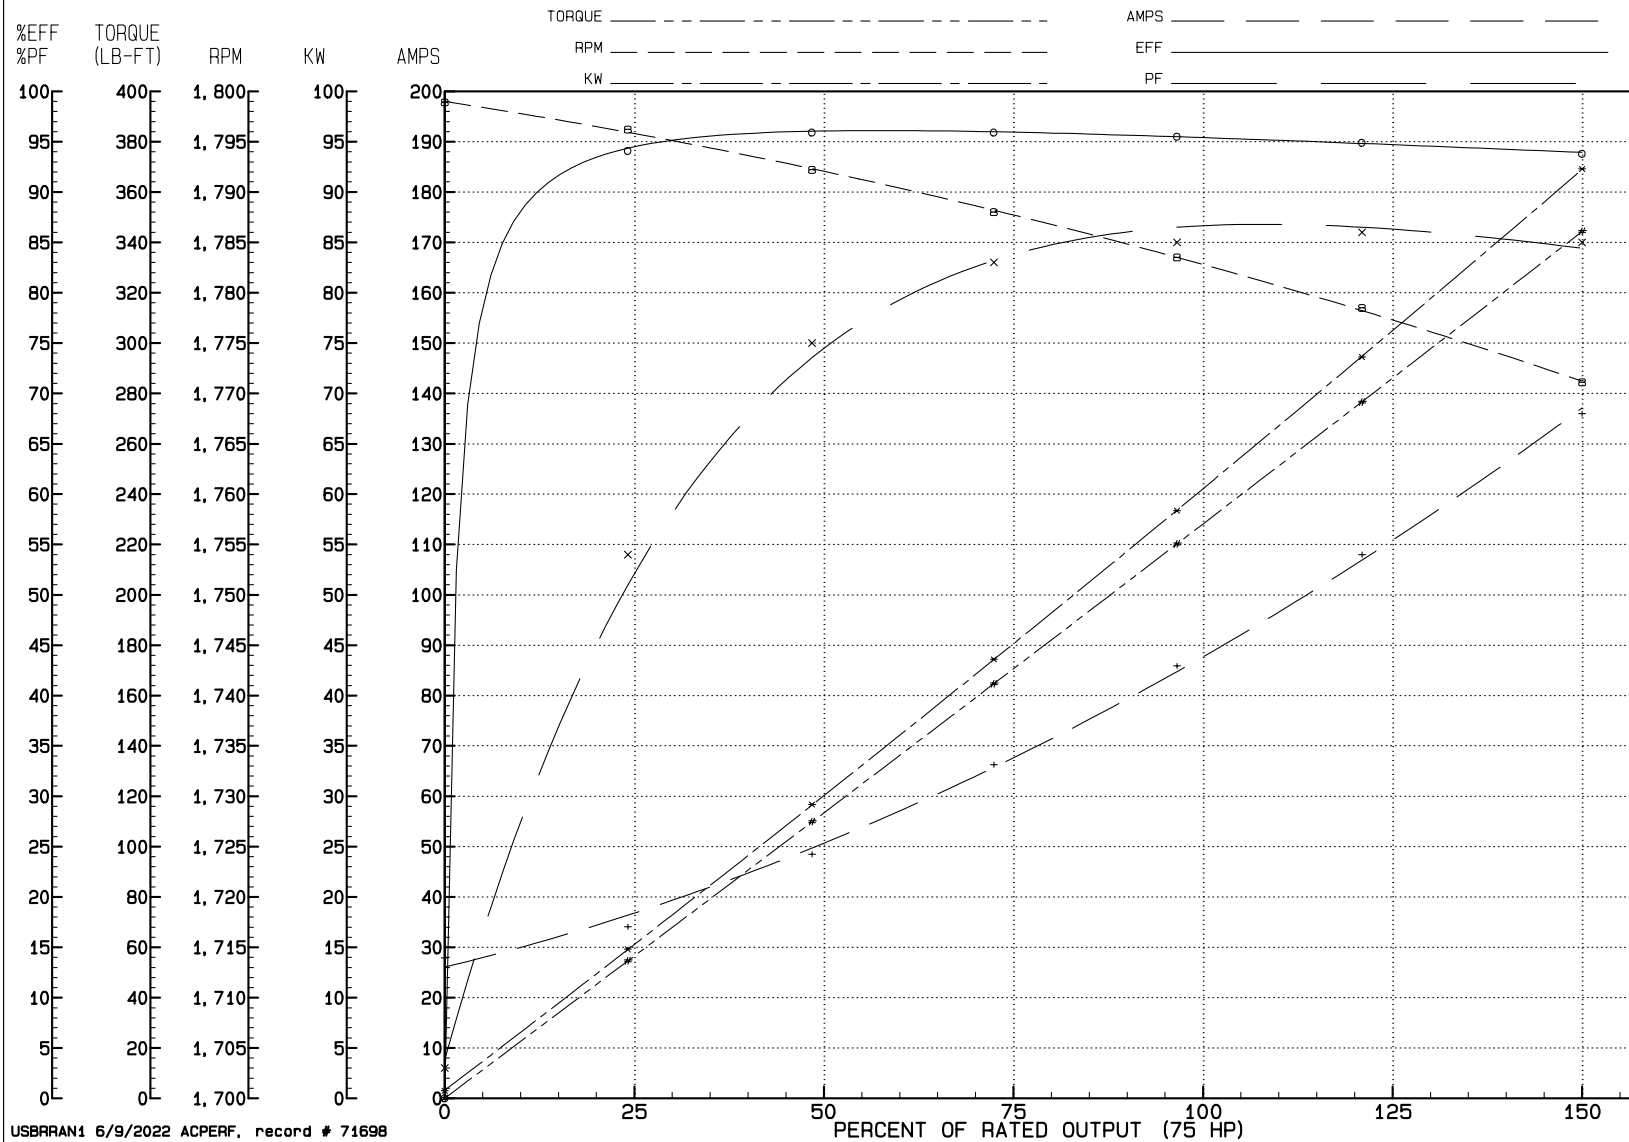

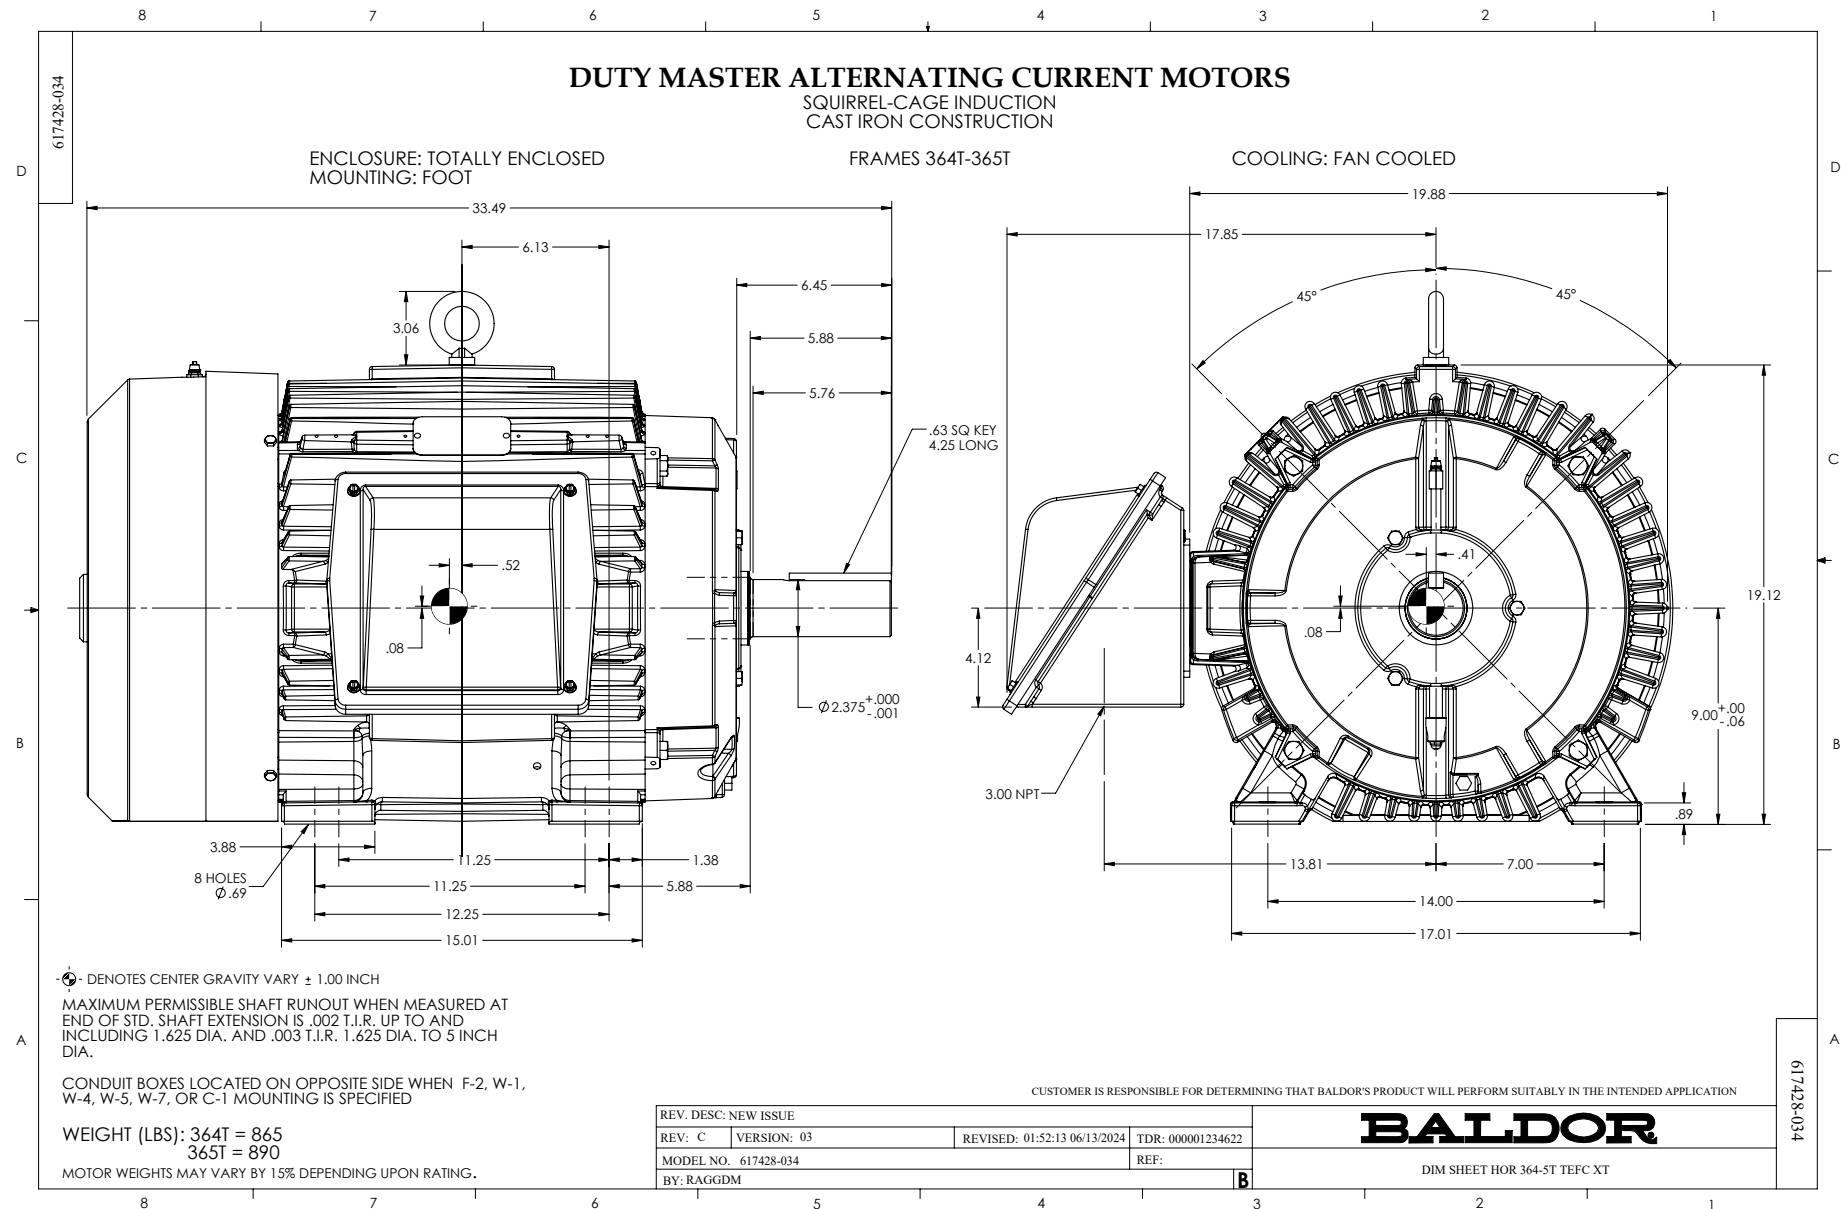

416820-036

A-C MOTOR
CONNECTION DIAGRAM
STANDARD 3 LEAD CONNECTED

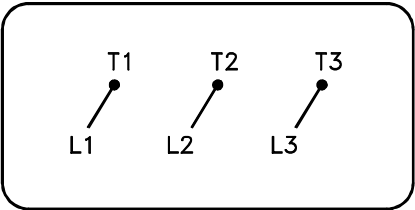

(N.P. 1575-BA)

416820-036

REV. DESC: LOADED TO BUS, C/R 335225		
REV. LTR: -	VERSION: 00	TDR: 000000538207
FILE: \MGA\00000\682	REVISED: 11: 54: 06 04/30/2010	
MTL: -	BY: RAGRA	

BALDOR

CONN DIAG - STANDARD 3 LEAD
SH 1 of 1