



Customer information packet

ECP4406TR-4

150HP, 1785RPM, 3PH, 60HZ, 445T, TEFC, F1

Class - CLI GP A,B,C,D

Division - Division II

Specifications

Enclosure	TEFC
Frame	445T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CL I GP A,B,C,D
Haz Area Division	Division II
Motor Letter Type	Three Phase
Output @ Frequency	150.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	CCSAUSEEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Mobil SHC 220 (Athens Only)
Constant Torque Speed Range	15-60
Current @ Voltage	169.000 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	95.8 %
Enclosure Modification	Severe Duty Features
Feedback Device	NO FEEDBACK
Haz Area Temp Code	T3
Heater Indicator	No Heater
High Voltage Full Load Amps	169.0 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	F
Lifting Lugs	Standard Lifting Lugs
Motor Lead Quantity/Wire Size	3 @ 1/0 AWG

Part detail

Revision	N
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	A44WG3335
Layout	617427-001
Eff. date	12-10-2025
CD Diagram	416820-036
Poles	04
Leads	3#1/0 Y
Proprietary	False
Created date	12-10-2013

Motor Standards	NEMA
Motor Type	A4488M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	44.75 IN
Power Factor	86
Product Family	General Industrial
Pulley End Bearing Type	Roller
Pulley Face Code	Standard
Service Factor	1.15
Shaft Diameter	3.375 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1785 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None


Nameplate

NP2496L	
MOBILITH SHC 220	

NP3238

CAT NO	ECP4406TR-4			SPEC NO.		A44-5218-3335							
HP	150	AMPS	169		VOLTS		460		DESIGN	B			
FRAME	445T	RPM	1785	HZ	60	AMB	40	SF	1.15				
D.E. BRG.DATA	NU222		O.D.E. BRG.DATA			6318		PH	3	DUTY	CONT	INSUL.CLASS	F
D.E. BRG.	110RU02M30X			TYPE	P	ENCL	TEFC	CODE	F				
O.D.E. BRG.	90BC03J30X			POWER FACTOR			86		NEMA NOM EFFICIENCY			95.8	
3/4 LOAD EFF.	96.1		MAX CORR KVAR			30.0		GUARANTEED EFFICIENCY			95		
TEMP CODE	T3		TEMP =		200								
CHP HZ	60-90		CT HZ	15-60		VT HZ	0-60						
INVERTER-TEMP-CODE	T3												
SER.NO.				MOTOR WEIGHT									

REL.S.O.	FRAME 445T	RPM 1785	S.F. 1.15	ROTOR 418143053AE
HP 150	VOLTS 460	AMPS 169	NEMA DESIGN B	TEST S.O. TYPICAL DATA
TYPE P	DUTY CONT	CODE LETTER F	ENCLOSURE TEFC	TEST DATE ---
PHASE / HERTZ 3/60	AMB °C / INSUL 40/F	E/S 498808		STATOR RES. @ 25°C .0298
				OHMS (BETWEEN LINES)

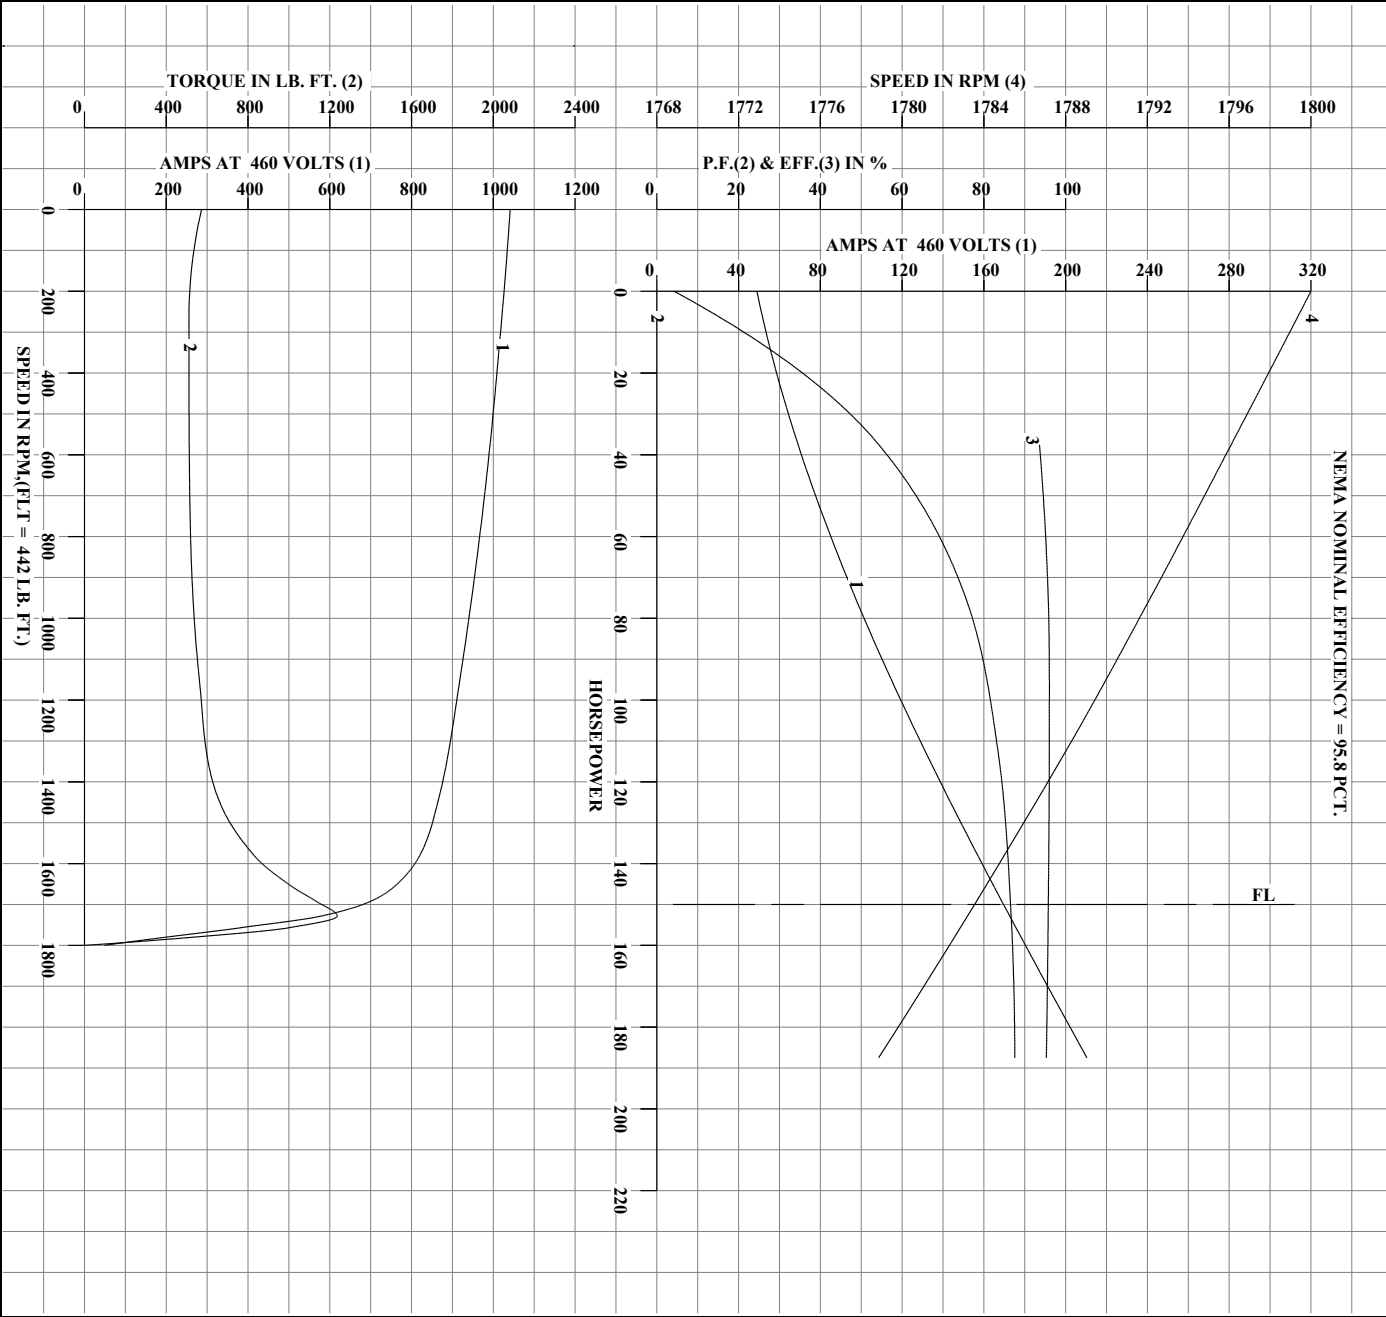

AMPERES SHOWN FOR 460 VOLT CONNECTION, IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.



DRAWN BY: C.B. ATANGANE
CHECKED BY: C.E. JAMISON
APPROVED BY: C.E. JAMISON
DATE: 10/16/23

AC MOTOR
PERFORMANCE
DATA


A44WCG3335-R001

ISSUE DATE 02/03/25

USCHATA

Printed on 02/03/2025 8:48 AM

REL.S.O.	FRAME 445T	HP 150	TYPE P	PHASE / HERTZ 3/60	RPM 1785	VOLTS 460	AMPS 169	DUTY CONT	AMB °C / INSUL 40/F	S.F. 1.15	NEMA DESIGN B	CODE LETTER F	ENCLOSURE TEFC	E/S 498808	ROTOR 418143053AE	TEST S.O. TYPICAL DATA
												TEST DATE ---	STATOR RES. @ 25°C .0298	OHMS (BETWEEN LINES)		

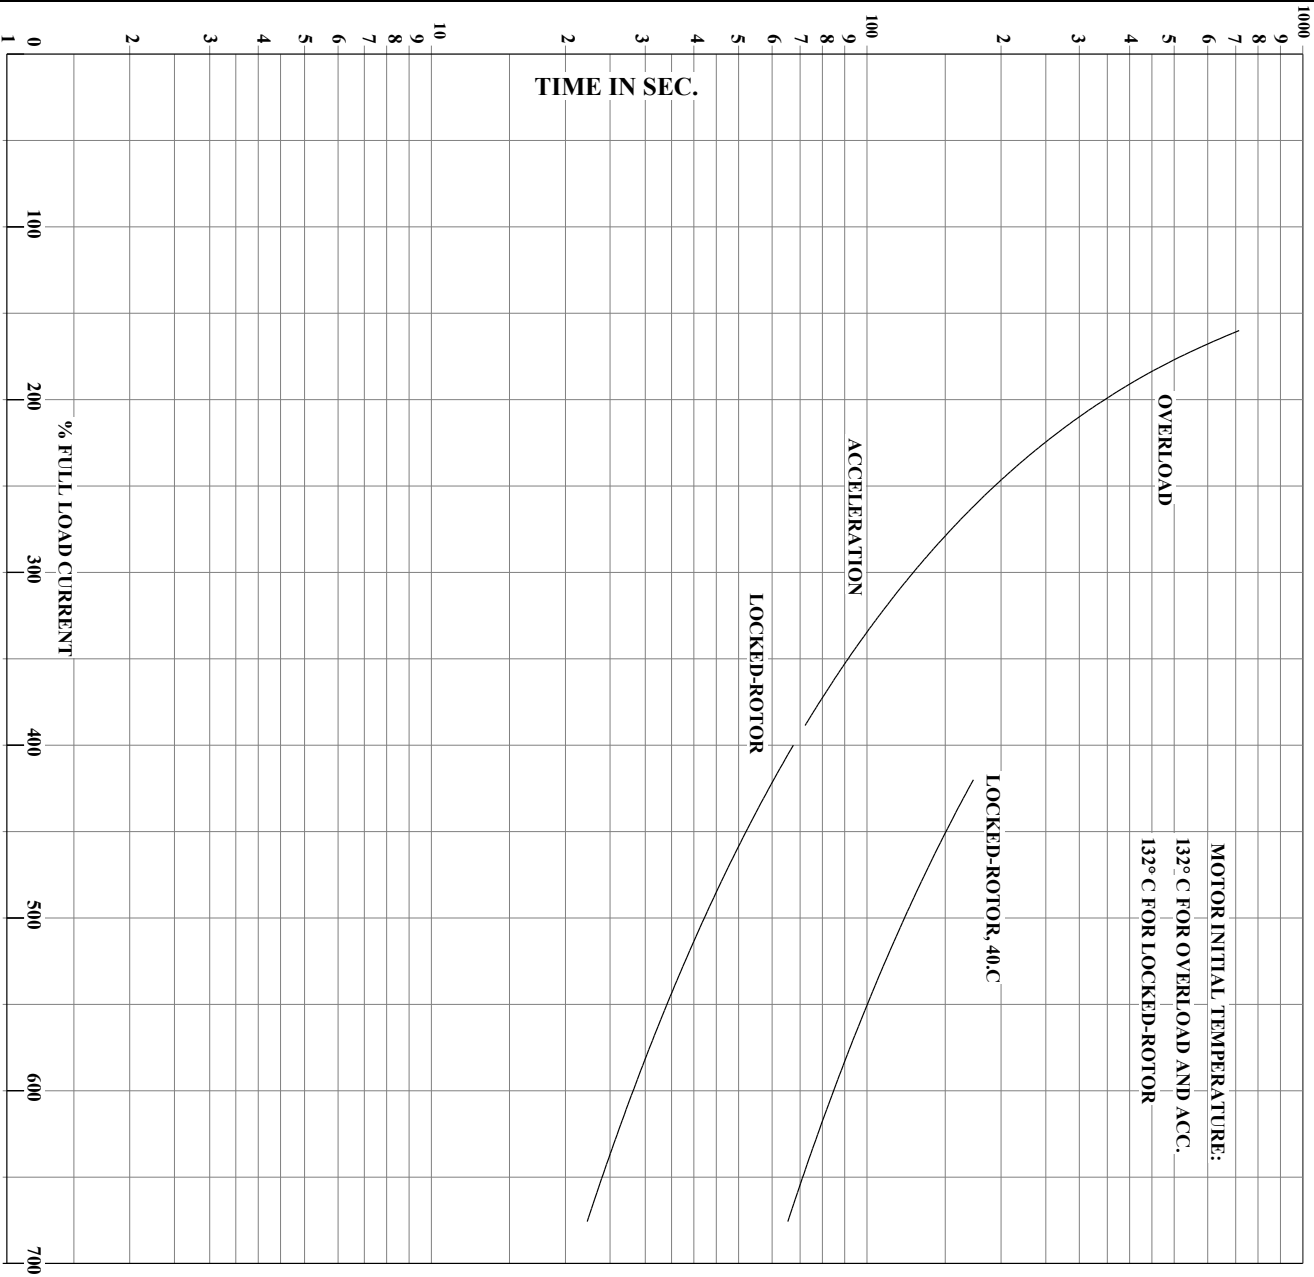

Thermal Limit Curve
NEMA Nominal Efficiency = 95.8 PCT.

AMPERES SHOWN FOR 460 VOLT CONNECTION, IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.

	DRAWN BY: C.B.ATANGANE	AC MOTOR PERFORMANCE DATA	A44WCG3335-R001
	CHECKED BY: C.E.JAMISON APPROVED BY: C.E.JAMISON DATE: 10/16/23		ISSUE DATE 02/03/25

USCHATA

Printed on 02/03/2025 8:48 AM

DUTY MASTER ALTERNATING CURRENT MOTORS

SQUIRREL-CAGE INDUCTION



ENCLOSURE: TOTALLY ENCLOSED

FRAME G445T ABOVE NEMA RATINGS

COOLING: FAN COOLED

MOUNTING: FOOT

INCLUDES 444T FRAME MOUNTING HOLES

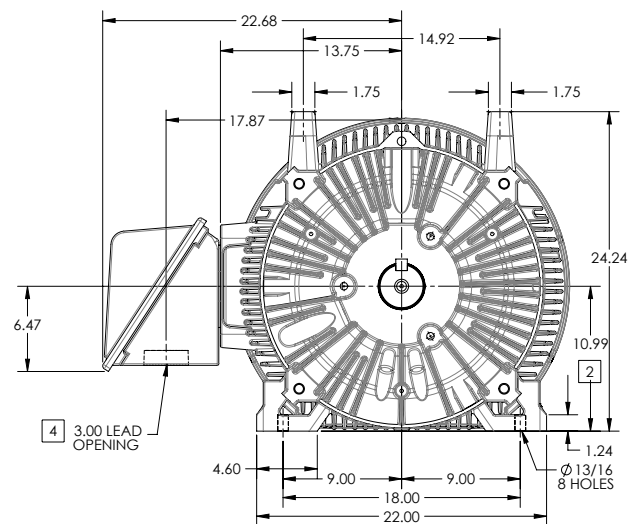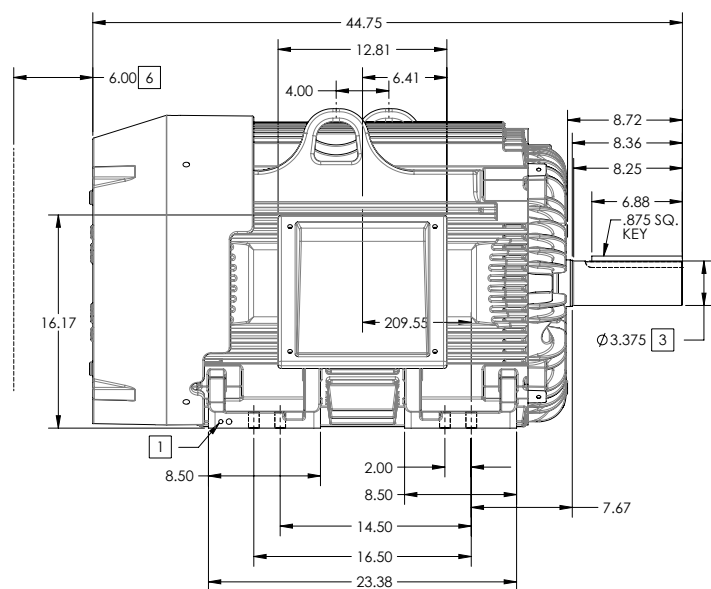

1. GROUND HOLES QTY 1 1/2-13 TAP; QTY 1 3/8-16 TAP
2. VARIES +.00-.06
3. VARIES +.000-.001
4. ON STANDARD MOTORS THIS IS CONDUIT SIZE. ON XT AND CORROSION PROOF MOTOR THIS IS PIPE TAP.
5. MOTOR WEIGHTS MAY VARY BY 15% DEPENDING ON RATING.
6. OBSTRUCTION MUST NOT ENCR OACH ON AIR INLET

CONDUIT BOX LOCATED ON OPPOSITE SIDE WHEN F-2.
IF MOUNTING CLEARANCE DETAILS ARE REQUIRED, CONSULT FACTORY.
MAXIMUM PERMISSIBLE SHAFT RUNOUT WHEN MEASURED AT END OF
STANDARD SHAFT EXTENSION IS .003" T.I.R. TO 5 INCH DIA.

[5] WEIGHT (LBS): 2130

DRIVE END AIR DEFLECTOR IS ONLY INCLUDED WHEN NECESSARY.

DIMENSIONS ARE IN INCHES; SEE SHEET 2 FOR DIMENSIONS IN MILLIMETERS

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT MOTOR PERFORMANCE IS SUITABLE IN THE APPLICATION.

SHEET NUMBER
1 OF 2

100-2272119

REV. DESC: SHEET 2 NEEDS METRIC FOOT HOLE DIMENSION			
REV: E	VERSION: 05	REVISED: 09-22-56 06/12/2014	TDR: 000000857938
MODEL NO. 617427-001		REF:	
BY: RAGRA	Material:		

BALDOR

G445T444T STD - FOOTED - SIDE/CENTER C/B

617427-001

DUTY MASTER ALTERNATING CURRENT MOTORS

SQUIRREL-CAGE INDUCTION



ENCLOSURE: TOTALLY ENCLOSED

FRAME G445T ABOVE NEMA RATINGS

COOLING: FAN COOLED

MOUNTING: FOOT

INCLUDES 444T FRAME MOUNTING HOLES

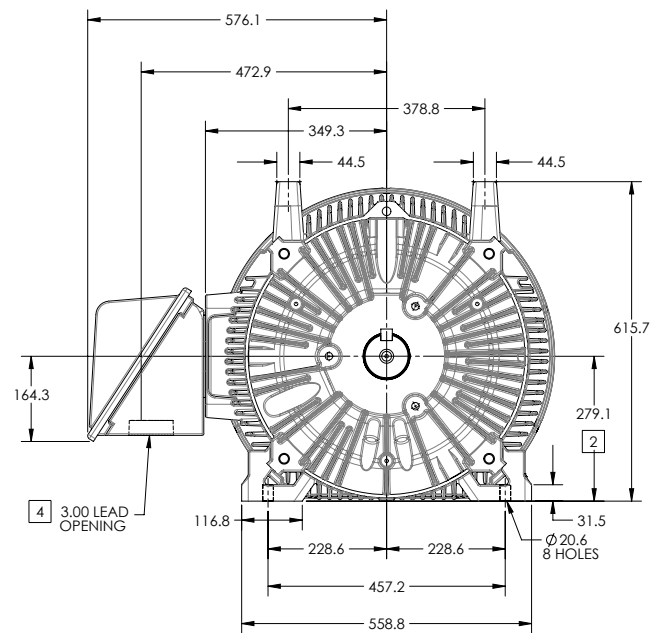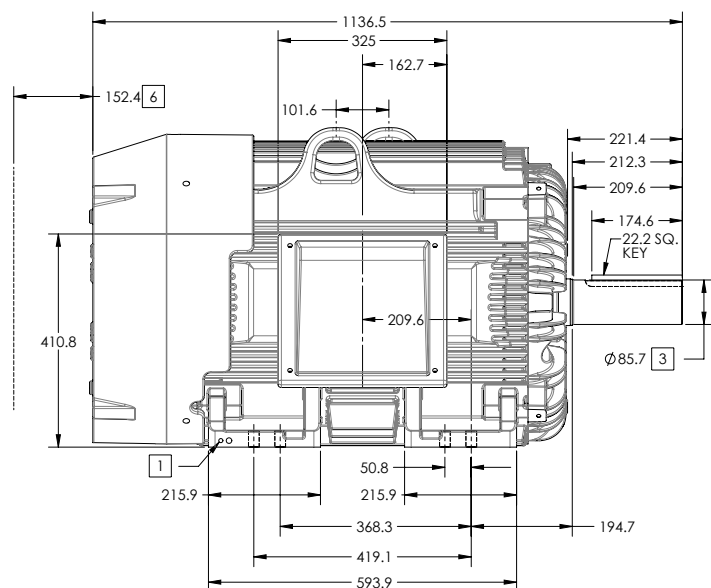

1. GROUND HOLES QTY 1 1/2-13 TAP; QTY 1 3/8-16 TAP
2. VARIES +0,-1.5
3. VARIES +00,-.03
4. ON STANDARD MOTORS THIS IS CONDUIT SIZE. ON XT AND CORROSION PROOF MOTOR THIS IS PIPE TAP.
5. MOTOR WEIGHTS MAY VARY BY 15% DEPENDING ON RATING.
6. OBSTRUCTION MUST NOT ENCR OACH ON AIR INLET

CONDUIT BOX LOCATED ON OPPOSITE SIDE WHEN F-2.
IF MOUNTING CLEARANCE DETAILS ARE REQUIRED, CONSULT FACTORY.
MAXIMUM PERMISSIBLE SHAFT RUNOUT WHEN MEASURED AT END OF
STANDARD SHAFT EXTENSION IS .08 MM T.I.R. TO 127 MM DIA.

[5] WEIGHT (KGS): 970

DRIVE END AIR DEFLECTOR IS ONLY INCLUDED WHEN NECESSARY.

DIMENSIONS ARE IN MILLIMETERS; SEE SHEET 1 FOR DIMENSIONS IN INCHES

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT MOTOR PERFORMANCE IS SUITABLE IN THE APPLICATION.

SHEET NUMBER
2 OF 2

100-2272119

REV. DESC: SHEET 2 NEEDS METRIC FOOT HOLE DIMENSION	
REV: E VERSION: 05 REVISED: 09-22-56 06/12/2014 TDR: 00000857938	
MODEL NO. 617427-001 REF:	
BY: RAGRA Material:	


BALDOR

G445T444T STD - FOOTED - SIDE/CENTER C/B

617427-001

416820-036

A-C MOTOR
CONNECTION DIAGRAM
STANDARD 3 LEAD CONNECTED

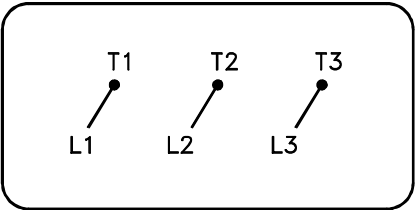

(N.P. 1575-BA)

REV. DESC: LOADED TO BUS, C/R 335225		
REV. LTR: -	VERSION: 00	TDR: 000000538207
FILE: \MGA\00000\682	REVISED: 11: 54: 06 04/30/2010	
MTL: -	BY: RAGRA	

BALDOR

CONN DIAG - STANDARD 3 LEAD
SH 1 of 1

416820-036