



Customer information packet

ECP4410T-4

125HP, 1785RPM, 3PH, 60HZ, 444T, A44076M, TEFC

Class - CLI GP A,B,C,D

Division - Division II

Specifications

Enclosure	TEFC
Frame	444T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CL I GP A,B,C,D
Haz Area Division	Division II
Motor Letter Type	Three Phase
Output @ Frequency	125.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	CCSAUSEEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Constant Torque Speed Range	10-60
Current @ Voltage	144.000 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	95.4 %
Feedback Device	NO FEEDBACK
Haz Area Temp Code	T3
Heater Indicator	No Heater
High Voltage Full Load Amps	144.0 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	G
Lifting Lugs	Standard Lifting Lugs
Motor Lead Quantity/Wire Size	3 @ 1/0 AWG
Motor Standards	NEMA

Part detail


Revision	Z
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	A44WG3870
Layout	617427-001
Eff. date	12-10-2025
CD Diagram	416820-036
Poles	04
Leads	3#1/0
Proprietary	False
Created date	08-13-2012

Motor Type	A44076M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	44.75 IN
Power Factor	85
Product Family	Other
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Service Factor	1.15
Shaft Diameter	3.375 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1785 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None

Nameplate

NP3238													
CAT NO	ECP4410T-4			SPEC NO.		P44G3939							
HP	125	AMPS	144	VOLTS		460			DESIGN	B			
FRAME	444T	RPM	1785	HZ	60	AMB	40	SF	1.15				
D.E. BRG.DATA	6318		O.D.E. BRG.DATA			6318		PH	3	DUTY	CONT	INSUL.CLASS	F
D.E. BRG.	90BC03J30X			TYPE	P	ENCL	TEFC	CODE	G				
O.D.E. BRG.	90BC03J30X			POWER FACTOR			85	NEMA NOM EFFICIENCY			95.4		
3/4 LOAD EFF.	95.8		MAX CORR KVAR			27.0		GUARANTEED EFFICIENCY			94.5		
TEMP CODE	T3	TEMP =		200									
CHP HZ	60-90	CT HZ	10-60		VT HZ	0-60							
INVERTER-TEMP-CODE	T3												
SER.NO.				MOTOR WEIGHT				1950					

REL.S.O.	444	RPM	1785	S.F.	1.15	ROTOR	418143052KE
FRAME	444	VOLTS	460	NEMA DESIGN	B	TEST S.O.	TYPICAL DATA
HP	125	AMPS	144	CODE LETTER	G	TEST DATE	--
TYPE	P	DUTY CONT		ENCLOSURE	TEFC	STATOR RES. @ 25°C	.0383
PHASE / HERTZ	3/60	AMB °C / INSUL.	40/F	E/S	498834	OHMS (BETWEEN LINES)	

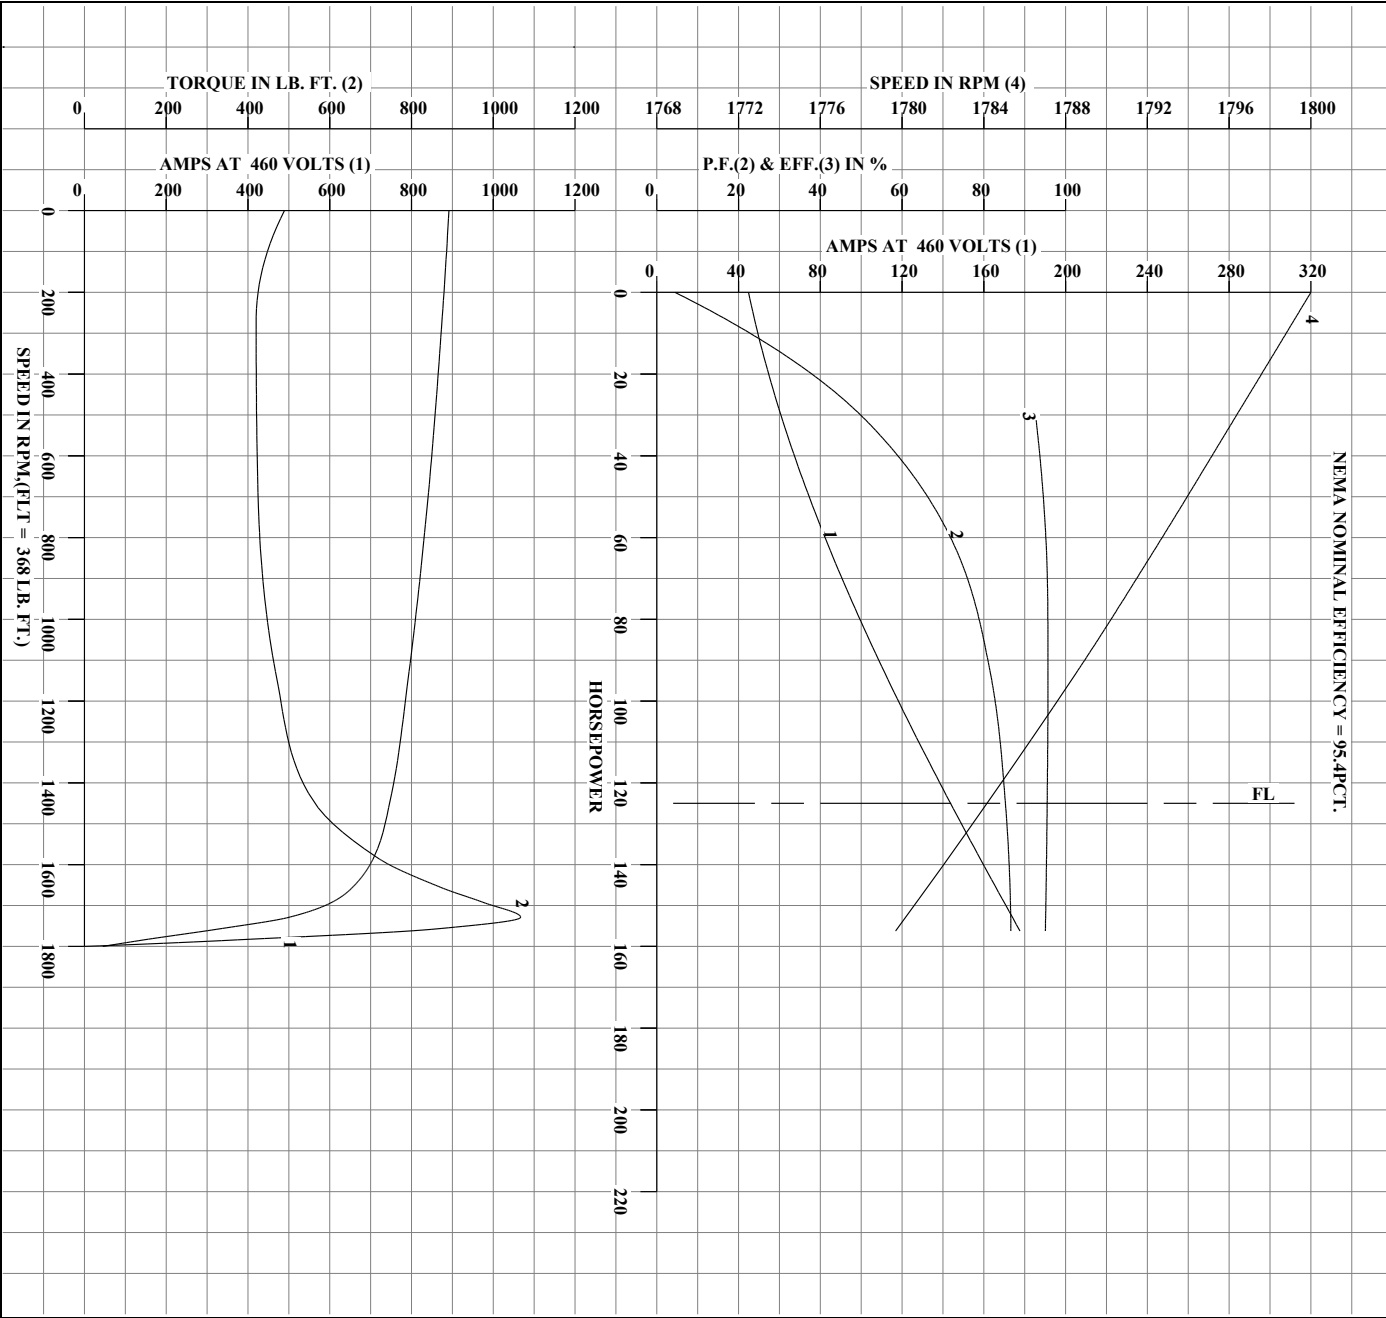

DRAWN BY: CD
CHECKED BY: CD
APPROVED BY: R. MCELVEEN
DATE: 1/18/11


AC MOTOR
PERFORMANCE
DATA

A44WG3870-R001
ISSUE DATE 05/04/21

USERCHRI

Printed on 06/01/2021 9:16 AM

REL.S.O.	FRAME 444	HP 125	TYPE P	PHASE / HERTZ 3/60	RPM 1785	VOLTS 460	AMPS 144	DUTY CONT	AMB °C / INSUL 40/F	S.F. 1.15	NEMA DESIGN B	CODE LETTER G	ENCLOSURE TEFC	E/S 498834	ROTOR 418143052KE	TEST S.O. TYPICAL DATA
												TEST DATE --	STATOR RES. @ 25°C .0383	OHMS (BETWEEN LINES)		

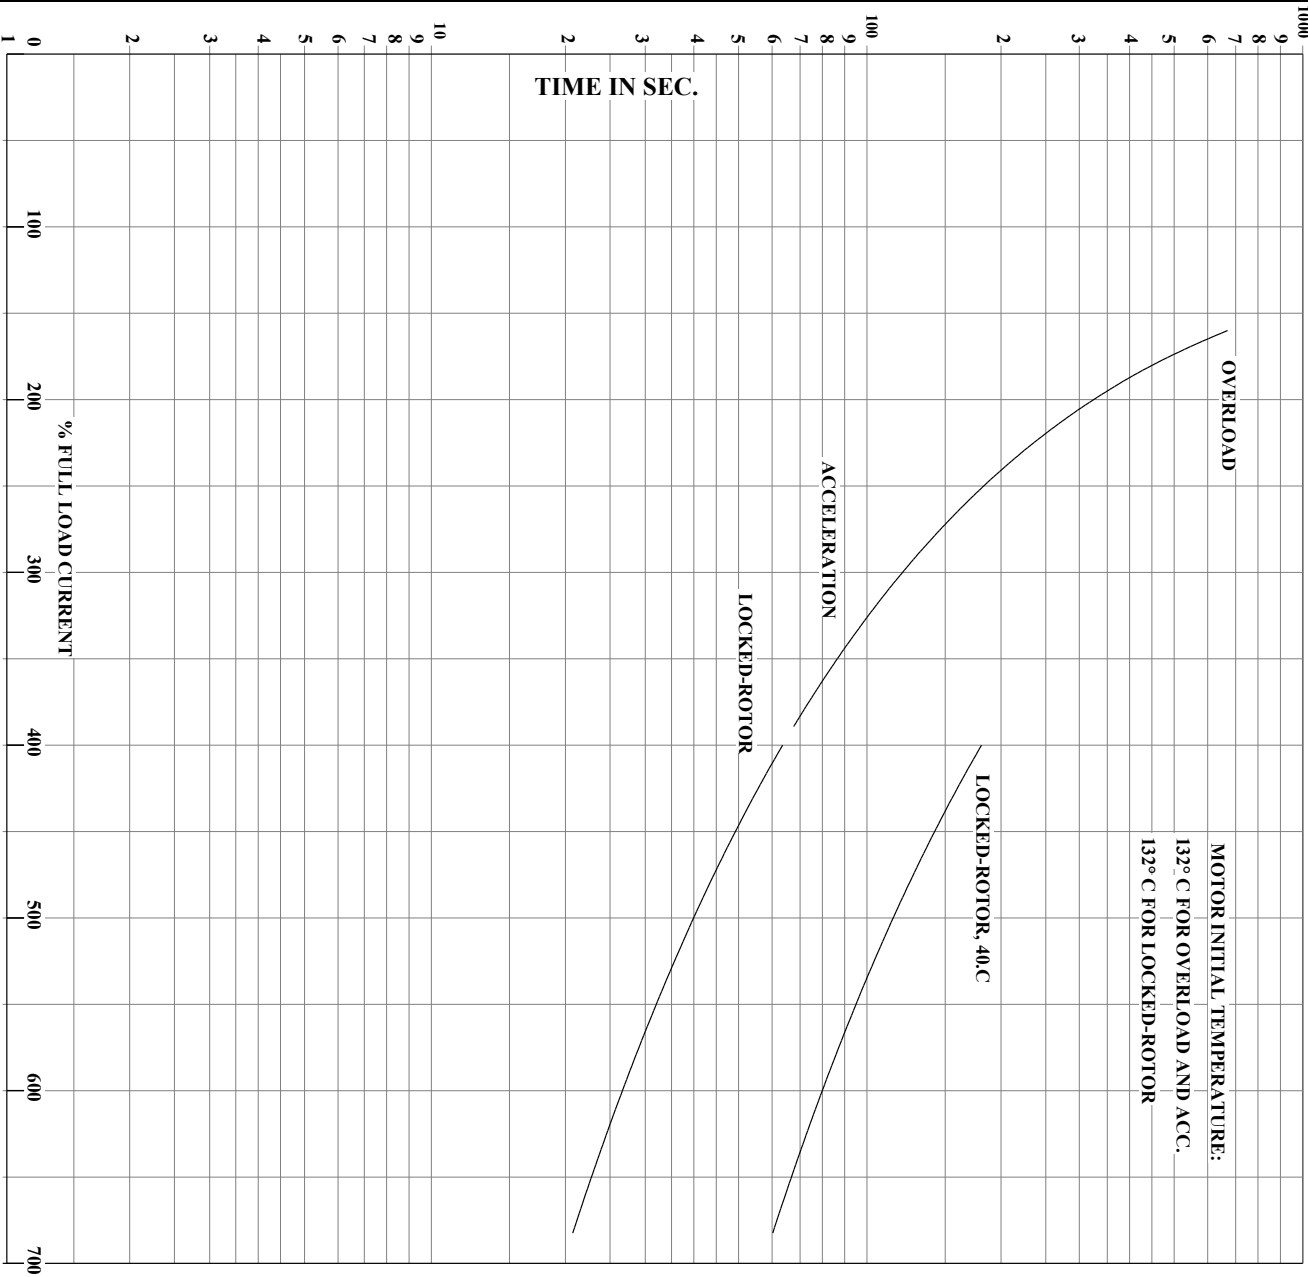

Thermal Limit Curve
NEMA Nominal Efficiency = 95.4PCT.

AMPERES SHOWN FOR 460 VOLT CONNECTION, IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.

	DRAWN BY: <u>CD</u> CHECKED BY: <u>CD</u> APPROVED BY: <u>R. MCELVEEN</u> DATE: <u>1/18/11</u>	AC MOTOR PERFORMANCE DATA	A44WG3870-R001
--	---	---------------------------------	----------------

USERCHRI

Printed on 06/01/2021 9:16 AM

DUTY MASTER ALTERNATING CURRENT MOTORS

SQUIRREL-CAGE INDUCTION



ENCLOSURE: TOTALLY ENCLOSED

FRAME G445T ABOVE NEMA RATINGS

COOLING: FAN COOLED

MOUNTING: FOOT

INCLUDES 444T FRAME MOUNTING HOLES

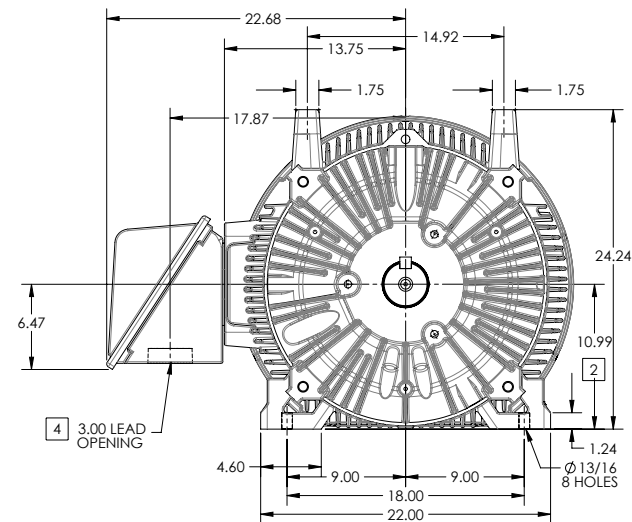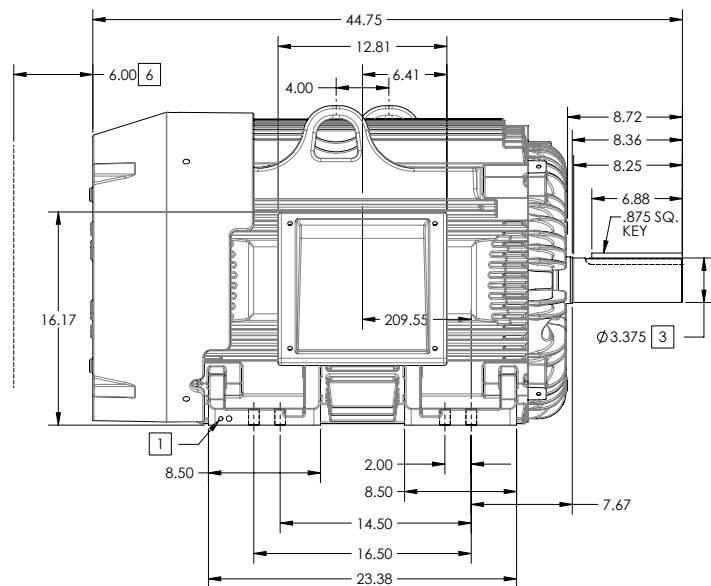

1. GROUND HOLES QTY 1 1/2-13 TAP; QTY 1 3/8-16 TAP
2. VARIES +.00,-.06
3. VARIES +.000,-.001
4. ON STANDARD MOTORS THIS IS CONDUIT SIZE. ON XT AND CORROSION PROOF MOTOR THIS IS PIPE TAP.
5. MOTOR WEIGHTS MAY VARY BY 15% DEPENDING ON RATING.
6. OBSTRUCTION MUST NOT ENCRATCH ON AIR INLET

CONDUIT BOX LOCATED ON OPPOSITE SIDE WHEN F-2.
IF MOUNTING CLEARANCE DETAILS ARE REQUIRED, CONSULT FACTORY.
MAXIMUM PERMISSIBLE SHAFT RUNOUT WHEN MEASURED AT END OF
STANDARD SHAFT EXTENSION IS .003" T.I.R. TO 5 INCH DIA.

5 WEIGHT (LBS): 2130

DRIVE END AIR DEFLECTOR IS ONLY INCLUDED WHEN NECESSARY.

DIMENSIONS ARE IN INCHES; SEE SHEET 2 FOR DIMENSIONS IN MILLIMETERS

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT MOTOR PERFORMANCE IS SUITABLE IN THE APPLICATION.

REV. DESC: SHEET 2 NEEDS METRIC FOOT HOLE DIMENSION			
REV: E	VERSION: 05	REVISED: 09-22-56 06/12/2014	TDR: 000000857938
MODEL NO. 617427-001			REF:
BY: RAGRA		Material:	

BALDOR®

G445T/444T STD – FOOTED – SIDE/CENTER C/B

DUTY MASTER ALTERNATING CURRENT MOTORS

SQUIRREL-CAGE INDUCTION



ENCLOSURE: TOTALLY ENCLOSED

FRAME G445T ABOVE NEMA RATINGS

COOLING: FAN COOLED

MOUNTING: FOOT

INCLUDES 444T FRAME MOUNTING HOLES

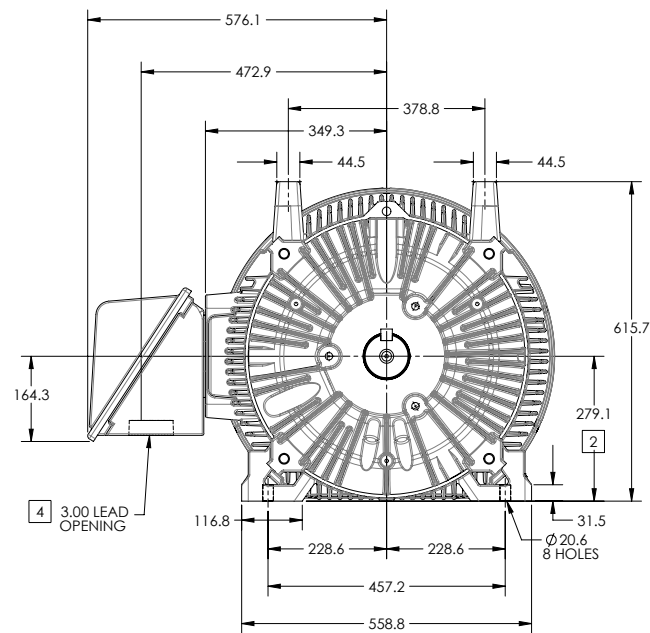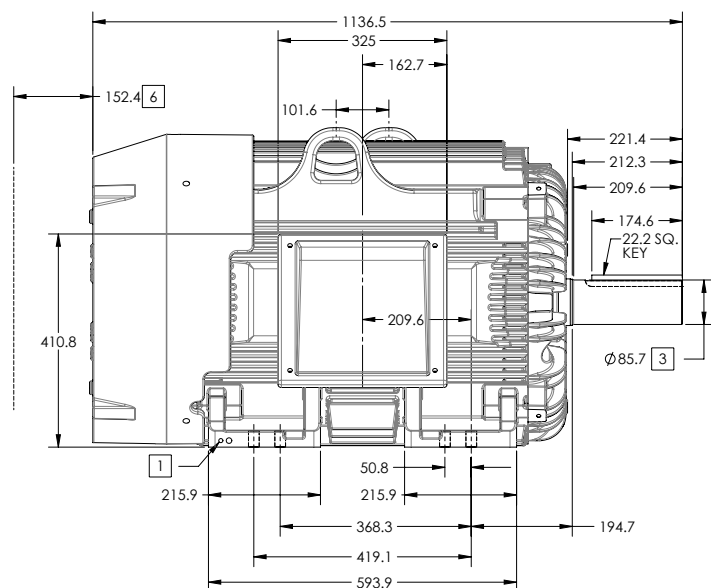

1. GROUND HOLES QTY 1 1/2-13 TAP; QTY 1 3/8-16 TAP
2. VARIES +0,-1.5
3. VARIES +.00,-.03
4. ON STANDARD MOTORS THIS IS CONDUIT SIZE. ON XT AND CORROSION PROOF MOTOR THIS IS PIPE TAP.
5. MOTOR WEIGHTS MAY VARY BY 15% DEPENDING ON RATING.
6. OBSTRUCTION MUST NOT ENCR OACH ON AIR INLET

CONDUIT BOX LOCATED ON OPPOSITE SIDE WHEN F-2.
IF MOUNTING CLEARANCE DETAILS ARE REQUIRED, CONSULT FACTORY.
MAXIMUM PERMISSIBLE SHAFT RUNOUT WHEN MEASURED AT END OF
STANDARD SHAFT EXTENSION IS .08 MM T.I.R. TO 127 MM DIA.

[5] WEIGHT (KGS): 970

DRIVE END AIR DEFLECTOR IS ONLY INCLUDED WHEN NECESSARY.

DIMENSIONS ARE IN MILLIMETERS; SEE SHEET 1 FOR DIMENSIONS IN INCHES

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT MOTOR PERFORMANCE IS SUITABLE IN THE APPLICATION.

SHEET NUMBER
2 OF 2

100-227-119

REV. DESC: SHEET 2 NEEDS METRIC FOOT HOLE DIMENSION	
REV: E VERSION: 05	REVISED: 09-22-56 06/12/2014 TDR: 000000857938
MODEL NO. 617427-001	REF:
BY: RAGRA	MATERIAL:


BALDOR

G445T444T STD - FOOTED - SIDE/CENTER C/B

617427-001

416820-036

A-C MOTOR
CONNECTION DIAGRAM
STANDARD 3 LEAD CONNECTED

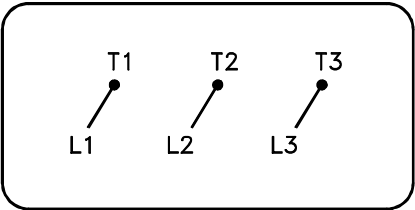

(N.P. 1575-BA)

416820-036

REV. DESC: LOADED TO BUS, C/R 335225		
REV. LTR: -	VERSION: 00	TDR: 000000538207
FILE: \MGA\00000\682		REVISED: 11: 54: 06 04/30/2010
MTL: -		BY: RAGRA

BALDOR

CONN DIAG - STANDARD 3 LEAD
SH 1 of 1