



Customer information packet

ECP4412T

125HP, 3570RPM, 3PH, 60HZ, 444TS, A4468M, TEFC

Class - CLI GP A,B,C,D

Division - Division II

Specifications

Enclosure	TEFC
Frame	444TS
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CL I GP A,B,C,D
Haz Area Division	Division II
Motor Letter Type	Three Phase
Output @ Frequency	125.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	CCSAUSEEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Constant Torque Speed Range	15-60
Current @ Voltage	138.000 A @ 460.0 V 276.000 A @ 230.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	95.0 %
Feedback Device	NO FEEDBACK
Haz Area Temp Code	T3
Heater Indicator	No Heater
High Voltage Full Load Amps	138.0 a
Insulation Class	F
Inverter Code	Inverter Ready
IP Rating	NONE
KVA Code	F

Part detail

Revision	W
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	A44WG3722
Layout	617427-493
Eff. date	12-10-2025
CD Diagram	416820-002
Poles	02
Leads	3#1/0,6#2
Proprietary	False
Created date	08-16-2012


Lifting Lugs	No Lifting Lugs
Motor Lead Quantity/Wire Size	3 @ 1/0 AWG
Motor Standards	NEMA
Motor Type	A4468M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	41.08 IN
Power Factor	89
Product Family	Other
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Service Factor	1.15
Shaft Diameter	2.375 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	3570 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None

Nameplate


NP3238													
CAT NO	ECP4412T			SPEC NO.		P44G3942							
HP	125	AMPS	276/138		VOLTS		230/460		DESIGN	B			
FRAME	444TS	RPM	3570	HZ	60	AMB	40	SF	1.15				
D.E. BRG.DATA	6313		O.D.E. BRG.DATA			6313		PH	3	DUTY	CONT	INSUL.CLASS	F
D.E. BRG.	65BC03J30X			TYPE	P	ENCL	TEFC	CODE	F				
O.D.E. BRG.	65BC03J30X			POWER FACTOR			89	NEMA NOM EFFICIENCY			95		
3/4 LOAD EFF.	94.9		MAX CORR KVAR			18.0		GUARANTEED EFFICIENCY			94.1		
TEMP CODE	T3	TEMP =		200									
CHP HZ	60-75	CT HZ	15-60		VT HZ	0-60							
INVERTER-TEMP-CODE	T3												
SER.NO.				MOTOR WEIGHT									


Accessories

Part number	Description	Multiplier
089490104B	BRKT,DE 089490103WCA, C-Face	P1
089490108A	D-FLANGE EP MACHINING, G28 W/6313 BRG	

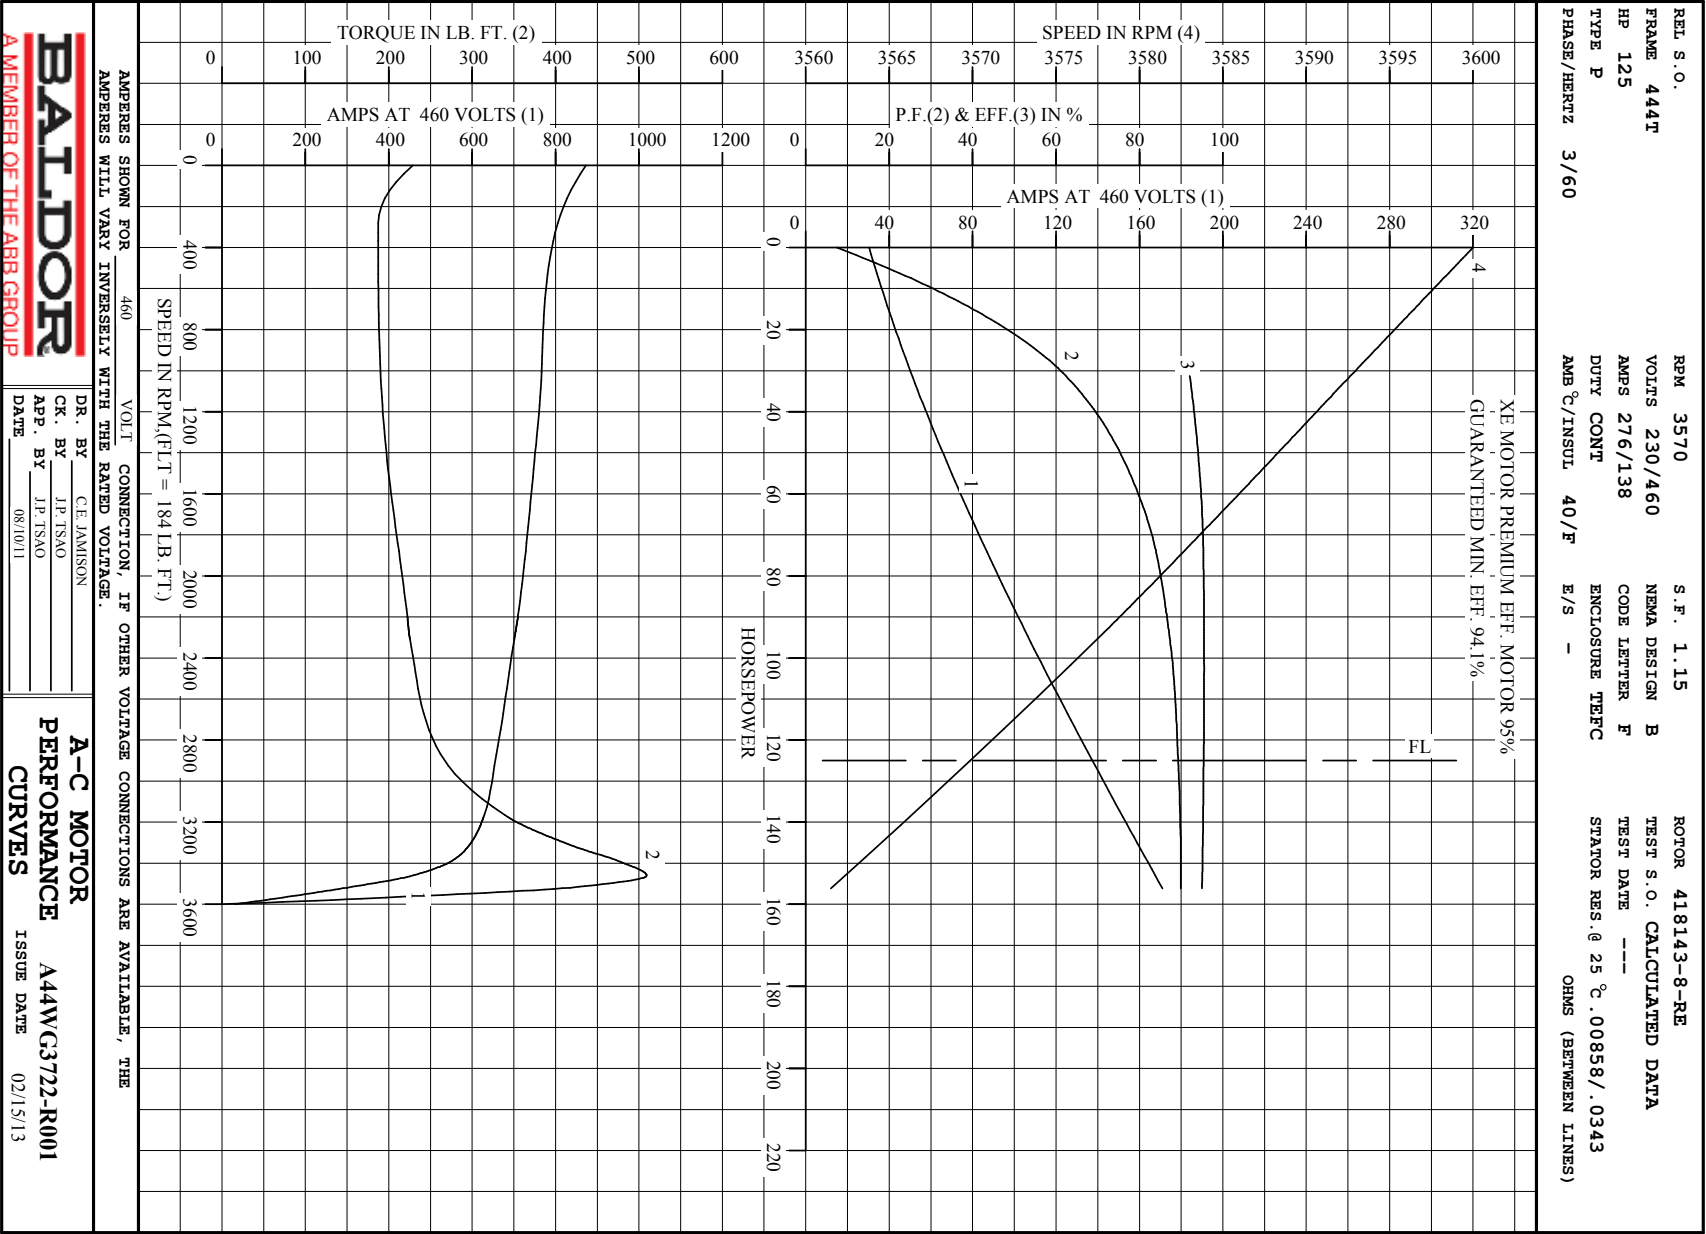



REL. S.O.	FRAME	HP	TYPE	PHASE/ HERTZ	RPM	VOLTS
	444T	125	P	3/60	3570	230/460
AMPS	DUTY	AMB °C/ INSUL.	S.F.	NEMA DESIGN	CODE LETTER	ENCL.
276/138	CONT	40/F	1.15	B	F	TEFC
E/S	ROTOR	TEST S.O.	TEST DATE	STATOR RES. @25 °C OHMS (BETWEEN LINES)		
-	418143-8-RE	---	---	.00858/.0343		
PERFORMANCE						
LOAD	HP	AMPERES	RPM	% POWER FACTOR	% EFFICIENCY	
NO LOAD	0	30.4	3600	7.45	0	
1/4	31.3	51.0	3593	62.3	92.1	
2/4	62.5	76.5	3585	80.7	94.9	
3/4	93.8	106	3578	87.1	95.5	
4/4	125	137	3570	89.3	95.4	
5/4	156	171	3562	89.9	95.0	
SPEED TORQUE						
	RPM	TORQUE % FULL LOAD	TORQUE LB.-FT.	AMPERES		
LOCKED ROTOR	0	125	229	873		
PULL UP	288	102	187	804		
BREAKDOWN	3461	277	509	456		
FULL LOAD	3570	100	184	137		
AMPERES SHOWN FOR 460. VOLT CONNECTION. IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE						
REMARKS: CALCULATED DATA XE MOTOR PREMIUM EFF. MOTOR 95% GUARANTEED MIN. EFF. 94.1%						
BALDOR A MEMBER OF THE ABB GROUP DR. BY C.E. JAMISON CK. BY J.P. TSAO APP. BY J.P. TSAO DATE 08/10/11 A-C MOTOR PERFORMANCE DATA A44WG3722-R001 ISSUE DATE 02/15/13						

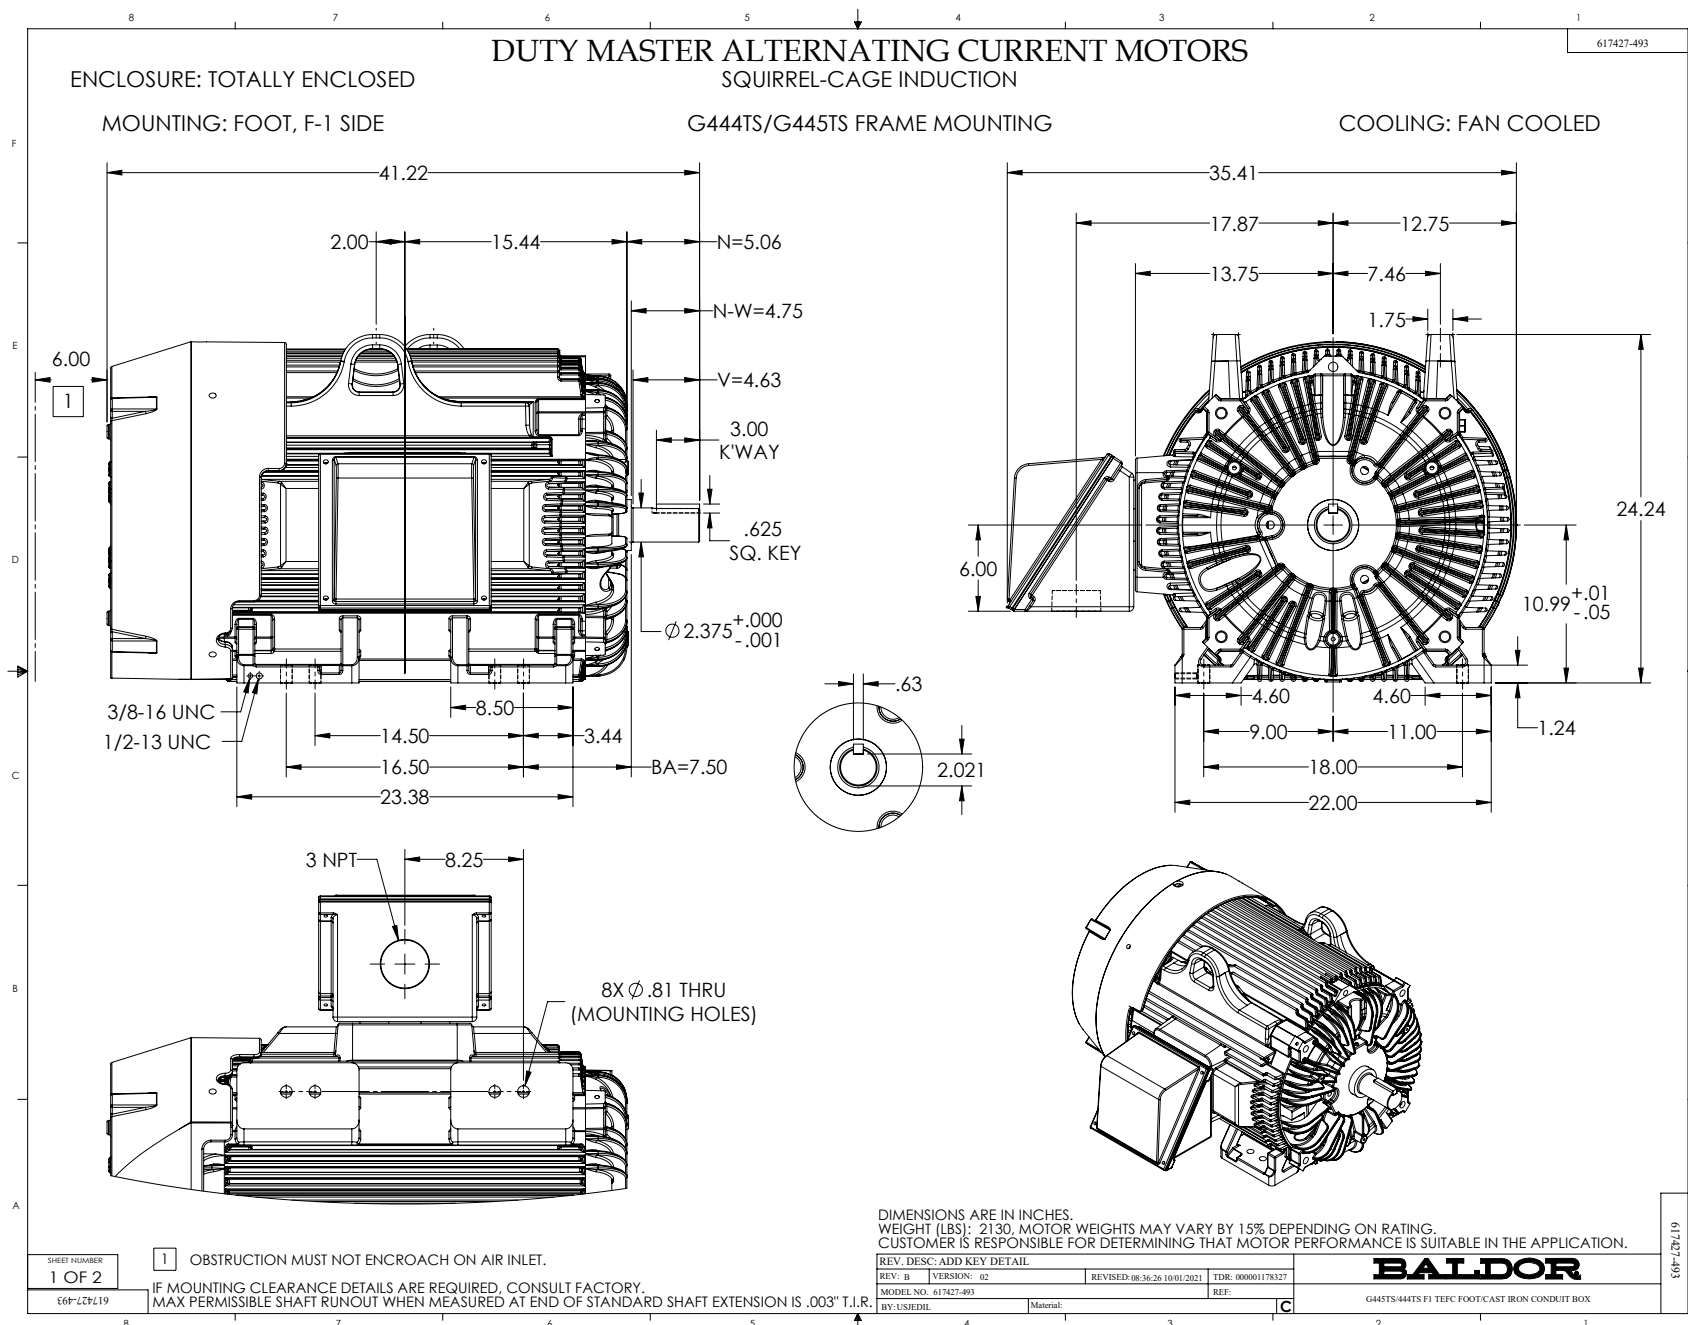

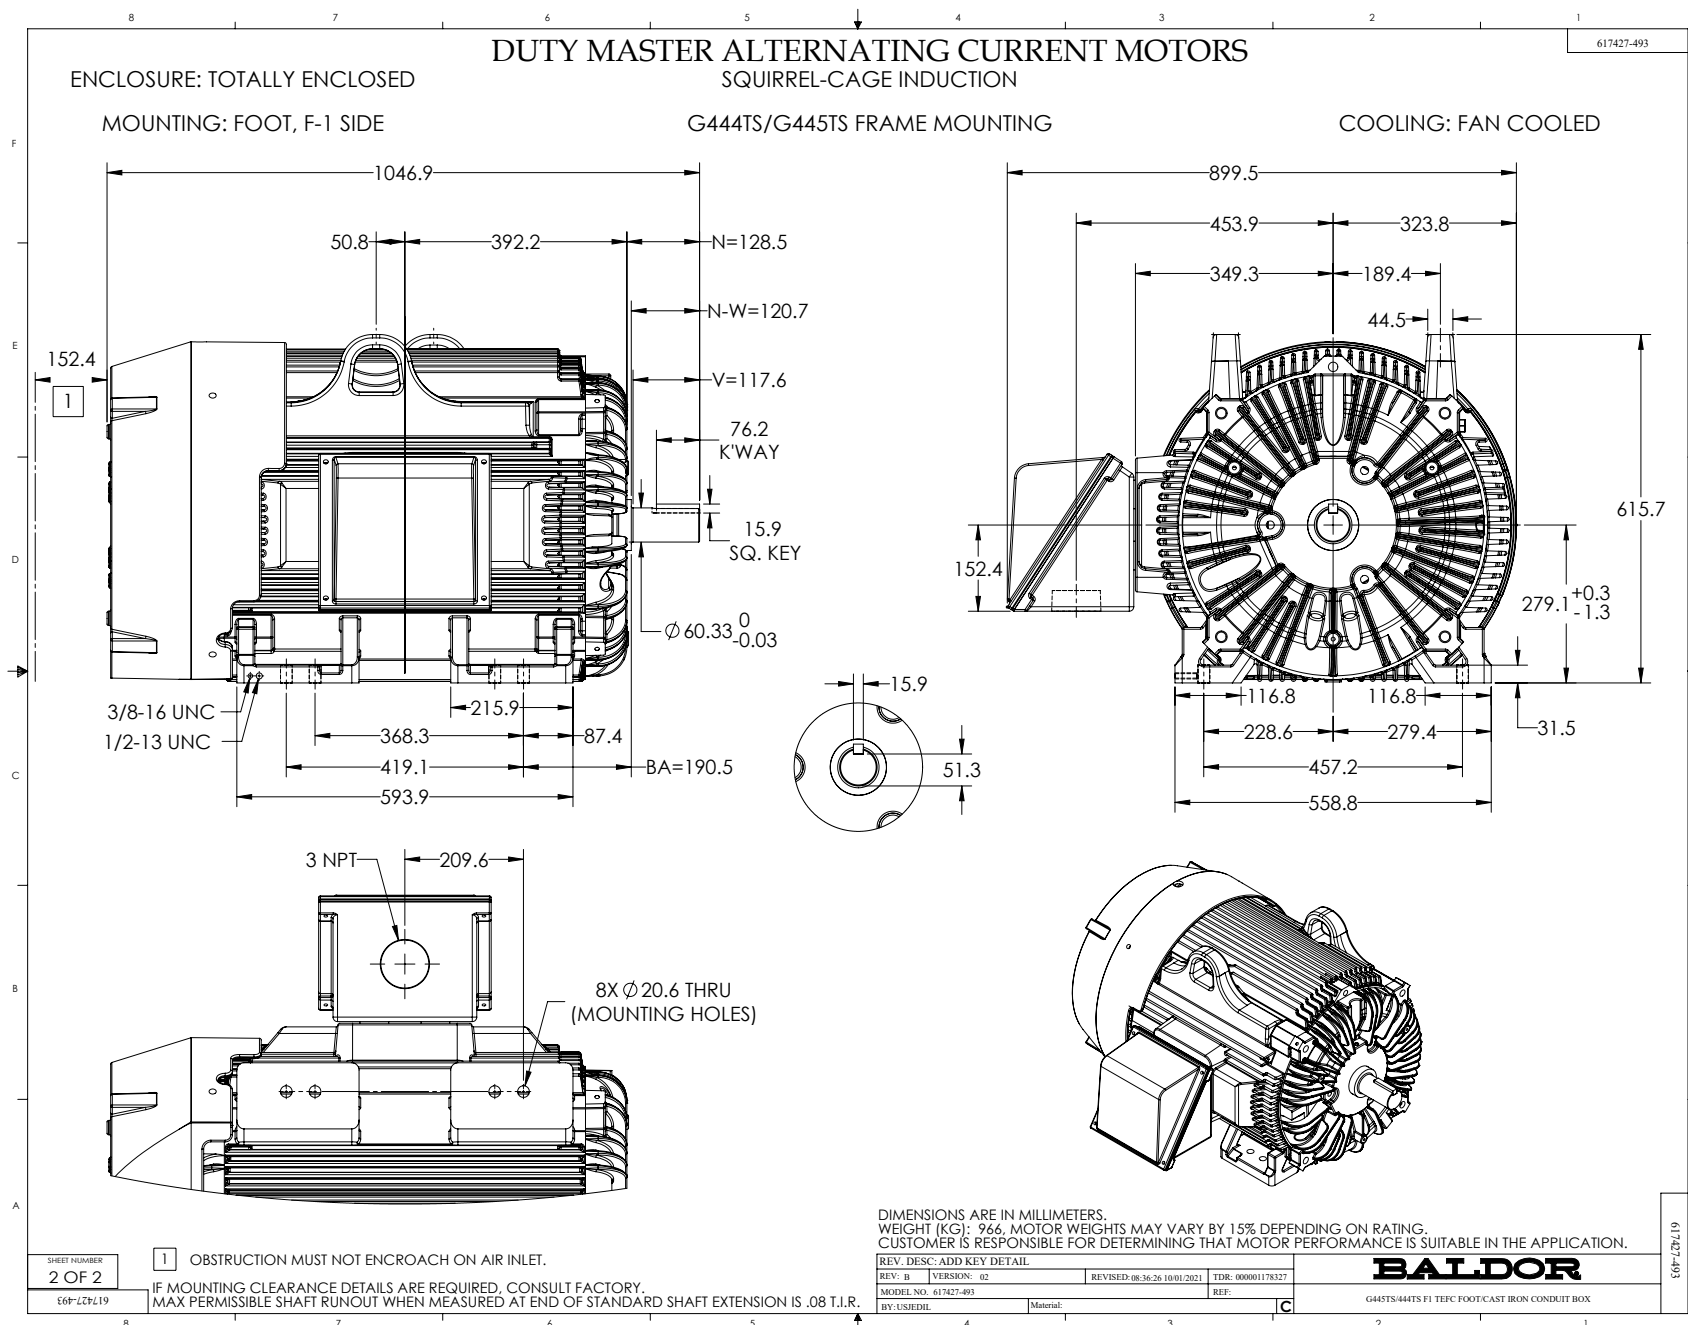

416820-002

A-C MOTOR
CONNECTION DIAGRAM
STANDARD 9 LEAD DELTA-CONNECTED

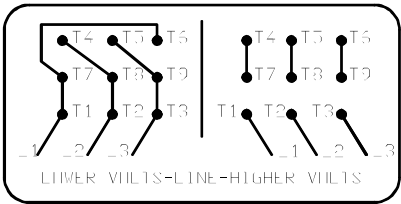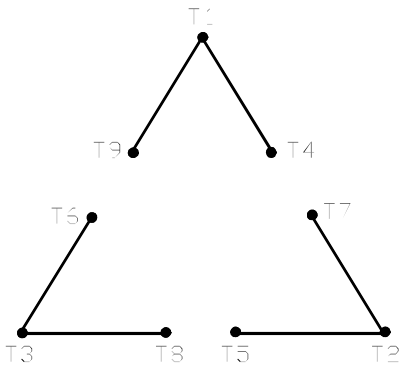

(N.P. 1575-B)

REV. DESC: FONT CHANGE FOR PDF SEARCHABLE		
REV. LTR: A	VERSION: 01	TDR: 000001009382
FILE: \MGA\00000\661	REVISED: 02:46:19 02/13/2020	BY: MGHMTT
MTL: —		

BALDOR - RELIANCE®

CONN DIAG — STANDARD 9 LEAD, DELTA-CONNECTED
SH 1 of 1

416820-002