



Customer information packet

ECP44302T-4

300HP, 3570RPM, 3PH, 60HZ, 449TS, A44128M, TEF

Class - CLI GP A,B,C,D

Division - Division II

Specifications

Enclosure	TEFC
Frame	449TS
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CL I GP A,B,C,D
Haz Area Division	Division II
Motor Letter Type	Three Phase
Output @ Frequency	300.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	CCSAUSEEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Constant Torque Speed Range	30-60
Current @ Voltage	318.000 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	96.2 %
Enclosure Modification	Severe Duty Features
Feedback Device	NO FEEDBACK
Haz Area Temp Code	T2C
Heater Indicator	No Heater
High Voltage Full Load Amps	318.0 a
Insulation Class	F
Inverter Code	Not Inverter
KVA Code	G
Lifting Lugs	No Lifting Lugs
Motor Lead Quantity/Wire Size	6 @ 2/0 AWG


Part detail


Revision	V
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	A44WG1242
Layout	617427-006
Eff. date	10-24-2024
CD Diagram	416820-036
Poles	02
Leads	3#2/0 (02 per group)
Proprietary	False
Created date	08-16-2012

Motor Standards	NEMA
Motor Type	A44128M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	49.71 IN
Power Factor	91
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Service Factor	1.15
Shaft Diameter	2.375 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	3570 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None

Nameplate


NP3238																	
CAT NO	ECP44302T-4			SPEC NO.		P44G3953											
HP	300	AMPS	318		VOLTS		460		DESIGN	B							
FRAME	449TS	RPM	3570	HZ	60	AMB	40	SF	1.15								
D.E. BRG.DATA	6313		O.D.E. BRG.DATA			6313		PH	3					DUTY	CONT	INSUL.CLASS	F
D.E. BRG.	65BC03J30X			TYPE	P	ENCL	TEFC	CODE	G								
O.D.E. BRG.	65BC03J30X			POWER FACTOR			91	NEMA NOM EFFICIENCY						96.2			
3/4 LOAD EFF.	96.5	MAX CORR KVAR			30.0		GUARANTEED EFFICIENCY							95.8			
TEMP CODE	T2C	TEMP =		230													
CHP HZ	60-75	CT HZ	30-60		VT HZ	0-60											
INVERTER-TEMP-CODE	T2C																
SER.NO.				MOTOR WEIGHT													

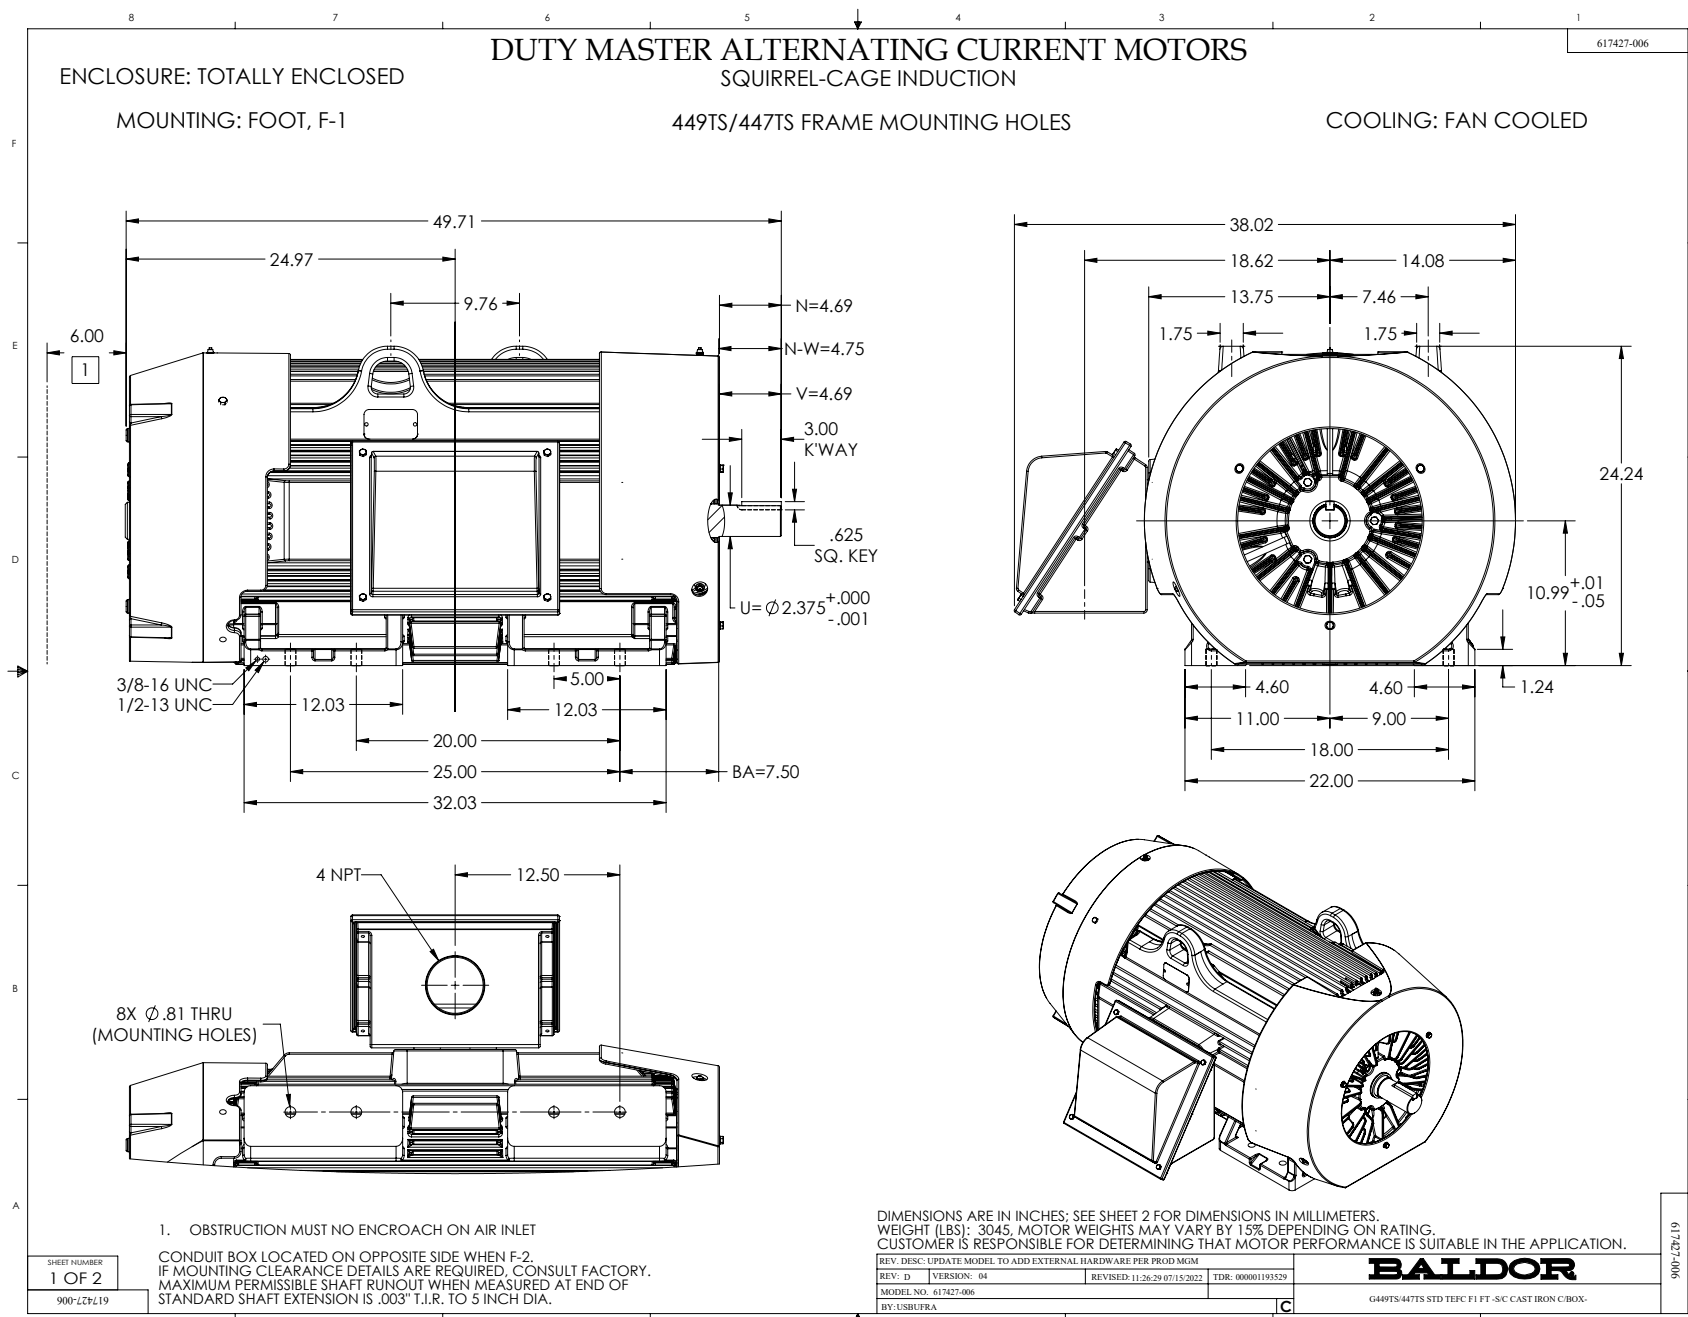

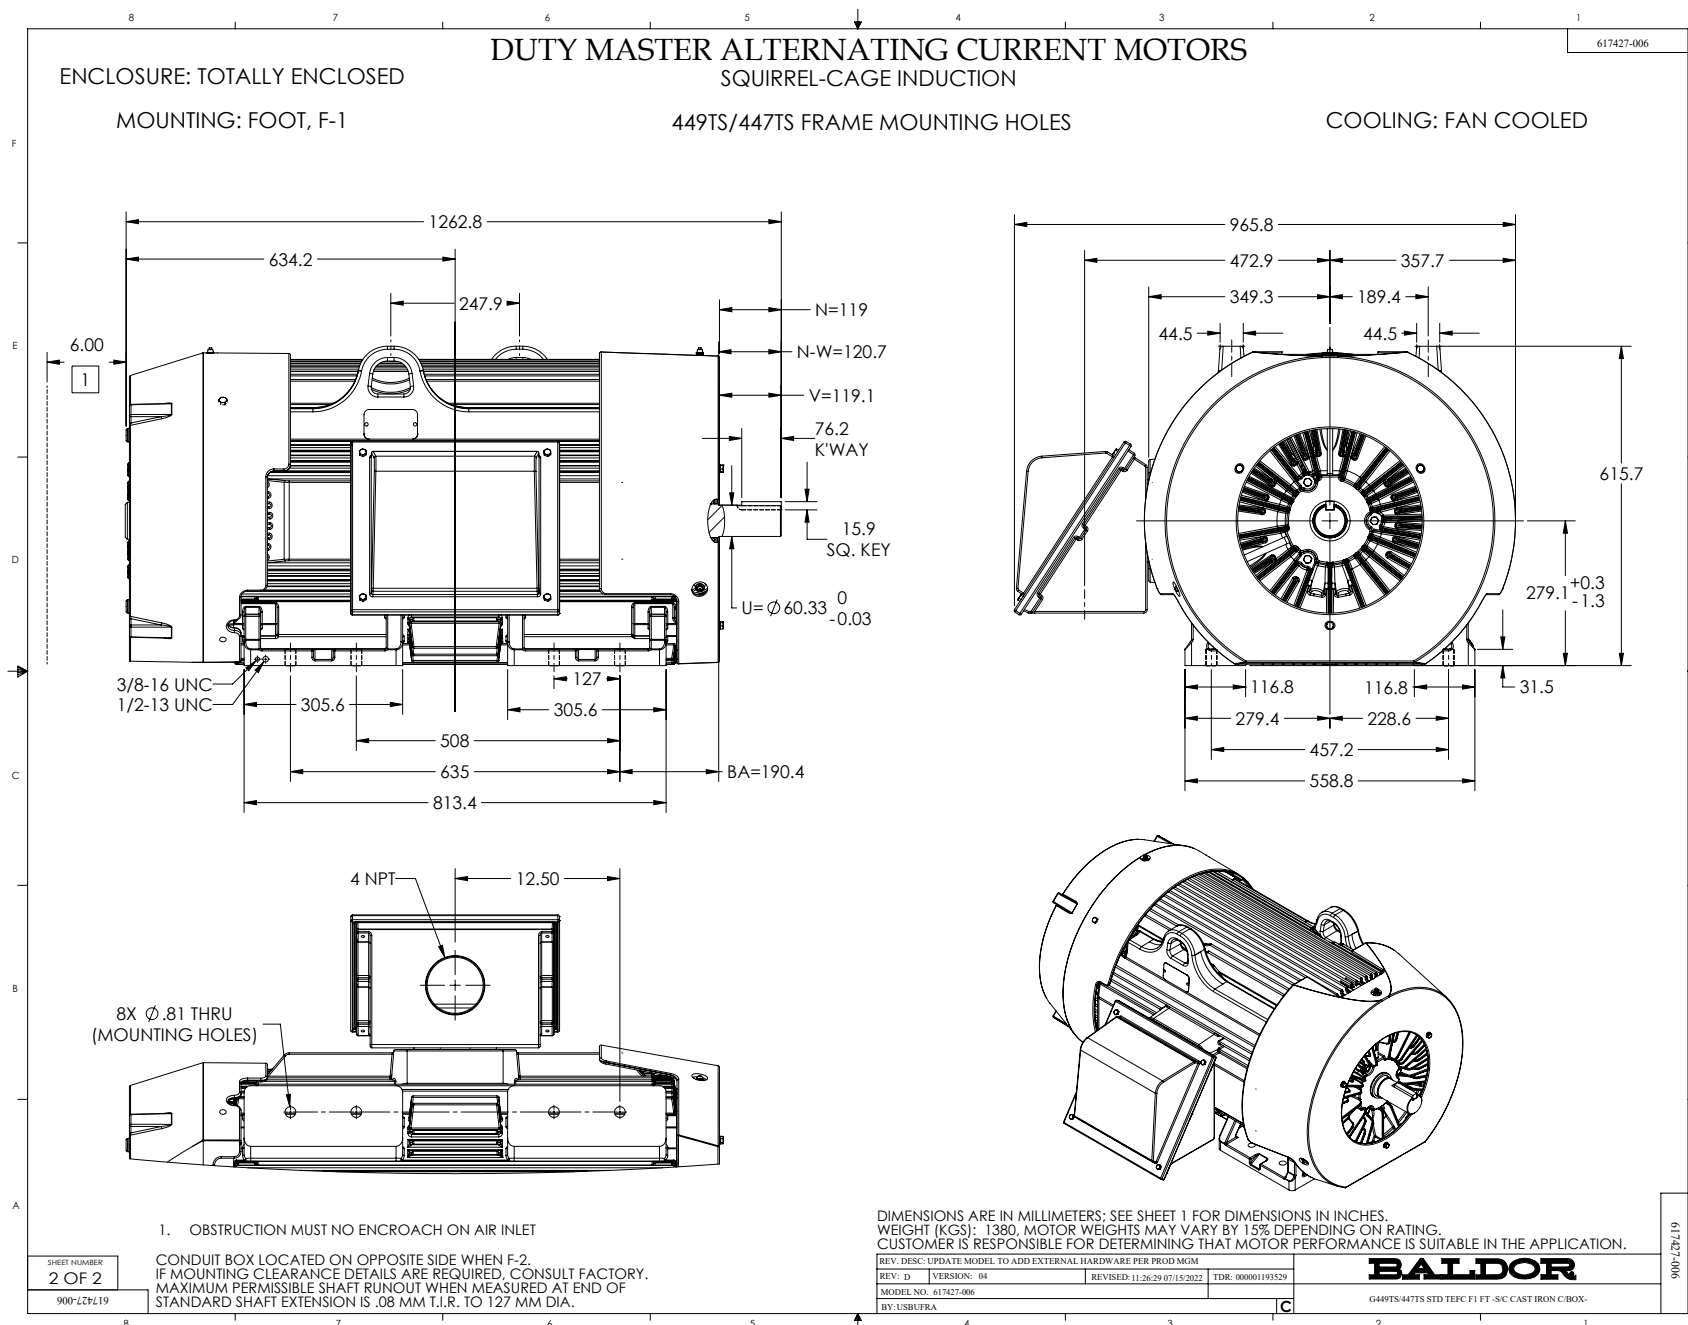

416820-036

A-C MOTOR
CONNECTION DIAGRAM
STANDARD 3 LEAD CONNECTED

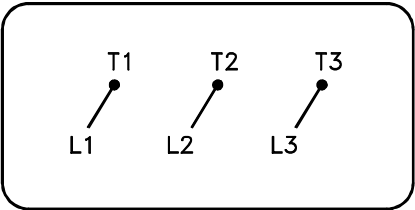

(N.P. 1575-BA)

416820-036

REV. DESC: LOADED TO BUS, C/R 335225		
REV. LTR: -	VERSION: 00	TDR: 000000538207
FILE: \MGA\00000\682		REVISED: 11: 54: 06 04/30/2010
MTL: -		BY: RAGRA

BALDOR

CONN DIAG - STANDARD 3 LEAD
SH 1 of 1