



Customer information packet

ECP84117T-4

30HP, 1180RPM, 3PH, 60HZ, 326T, TEFC, F1

Class - CLI GP A,B,C,D

Division - Division II

Specifications

Enclosure	TEFC
Frame	326T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CL I GP A,B,C,D
Haz Area Division	Division II
Motor Letter Type	Three Phase
Output @ Frequency	30.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	CCSA US CSA EEV NEMA PREMIUM NEMA_PREMIUM UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	1
Current @ Voltage	38.000 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	93.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Enclosure Modification	841
Feedback Device	NO FEEDBACK
Haz Area Temp Code	T3

Part detail

Revision	K
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	12WGZ195
Layout	12LYG135
Eff. date	11-03-2025
CD Diagram	CD0006
Poles	06
Leads	3#8
Proprietary	False
Created date	12-11-2018

Heater Indicator	No Heater
High Voltage Full Load Amps	38.0 a
Insulation Class	F
Inverter Code	Inverter Duty
IP Rating	IP56
KVA Code	G
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	1800 rpm
Motor Lead Termination	Ring Terminals
Motor Standards	NEMA
Motor Type	1268M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	30.74 IN
Power Factor	80
Product Family	Chem Process S/P 32-8 IEEE 841
Pulley Face Code	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	2.125 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Speed	1180 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP4332

STK.NO.	ECP84117T-4				P/N		ENCLOSURE				TEFC			
SPEC.	12-0000-0362			CC	010A	FRAME	326T	S/N						
HP	30			CLASS	F	HZ	60	ODE BRG	6312	DE BRG	6312			
RPM	1180	RPM MAX	1800	PH	3	DES	B	D.E. BRG.	60BC03X30X					
VOLT	460			KVA-CODE	G		O.D.E. BRG.		60BC03X30X					
AMP	38			MOTOR WEIGHT			637	GREASE	POLYREX EM					
RATING	40C AMB-CONT				MAX. KVAR		9.9	BLANK						
NEMA-NOM-EFF	93	# OF ROTOR BARS			42	SER.F.	1.15	IP	56					
G.MIN.EFF	91.7	# OF STATOR SLOTS			54	PF	80	INV.TYPE	PWM					
TEMP CODE	T3	INVERTER-TEMP-CODE				200								
TEMP =	200	C HP FR	60	C HP TO	90									
CT HZ FROM	1	CT HZ TO	60											
HTR-VOLTS		HTR-AMPS		HTR-WATTS			MAX. SPACE HEATER TEMP.				VT HZ FROM	O	VT HZ TO	60

AC Induction Motor Performance Data

Record # 93177

Typical performance - not guaranteed values

Winding: 12WGZ195-R001				Type: 1268M		Enclosure: TEFC		
Nameplate Data				460 V, 60 Hz: Single Voltage Motor				
Rated Output (HP)		30		Full Load Torque		133.6 LB-FT		
Volts		460		Start Configuration		direct on line		
Full Load Amps		38		Breakdown Torque		343 LB-FT		
R.P.M.		1180		Pull-up Torque		154 LB-FT		
Hz	60	Phase	3	Locked-rotor Torque		189 LB-FT		
NEMA Design Code		B	KVA Code	G	Starting Current		217 A	
Service Factor (S.F.)		1.15		No-load Current		15 A		
NEMA Nom. Eff.		93	Power Factor	80	Line-line Res. @ 25°C		0.24434 Ω	
Rating - Duty		40C		AMB-CONT		Temp. Rise @ Rated Load		55°C
S.F. Amps						Temp. Rise @ S.F. Load		68°C
						Locked-rotor Power Factor		29.1

Load Characteristics 460 V, 60 Hz, 30 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	45	67	76	80	81	81	81
Efficiency	90.6	93.5	93.8	93	92.4	91.1	92.8
Speed	1195.5	1190.7	1185.8	1180.5	1174.1	1166.3	1177
Line amperes	17.2	22.5	29.5	37.5	46.6	57	43


ABB Motors and Mechanical Inc.


WINDING # 12WGZ195

Typical performance - not guaranteed values.

30 HP 3 PH 60 HZ 1180 RPM 460 V 1268M



TORQUES (LB-FT): PO=343 PU=154 LR=189 LRA=217

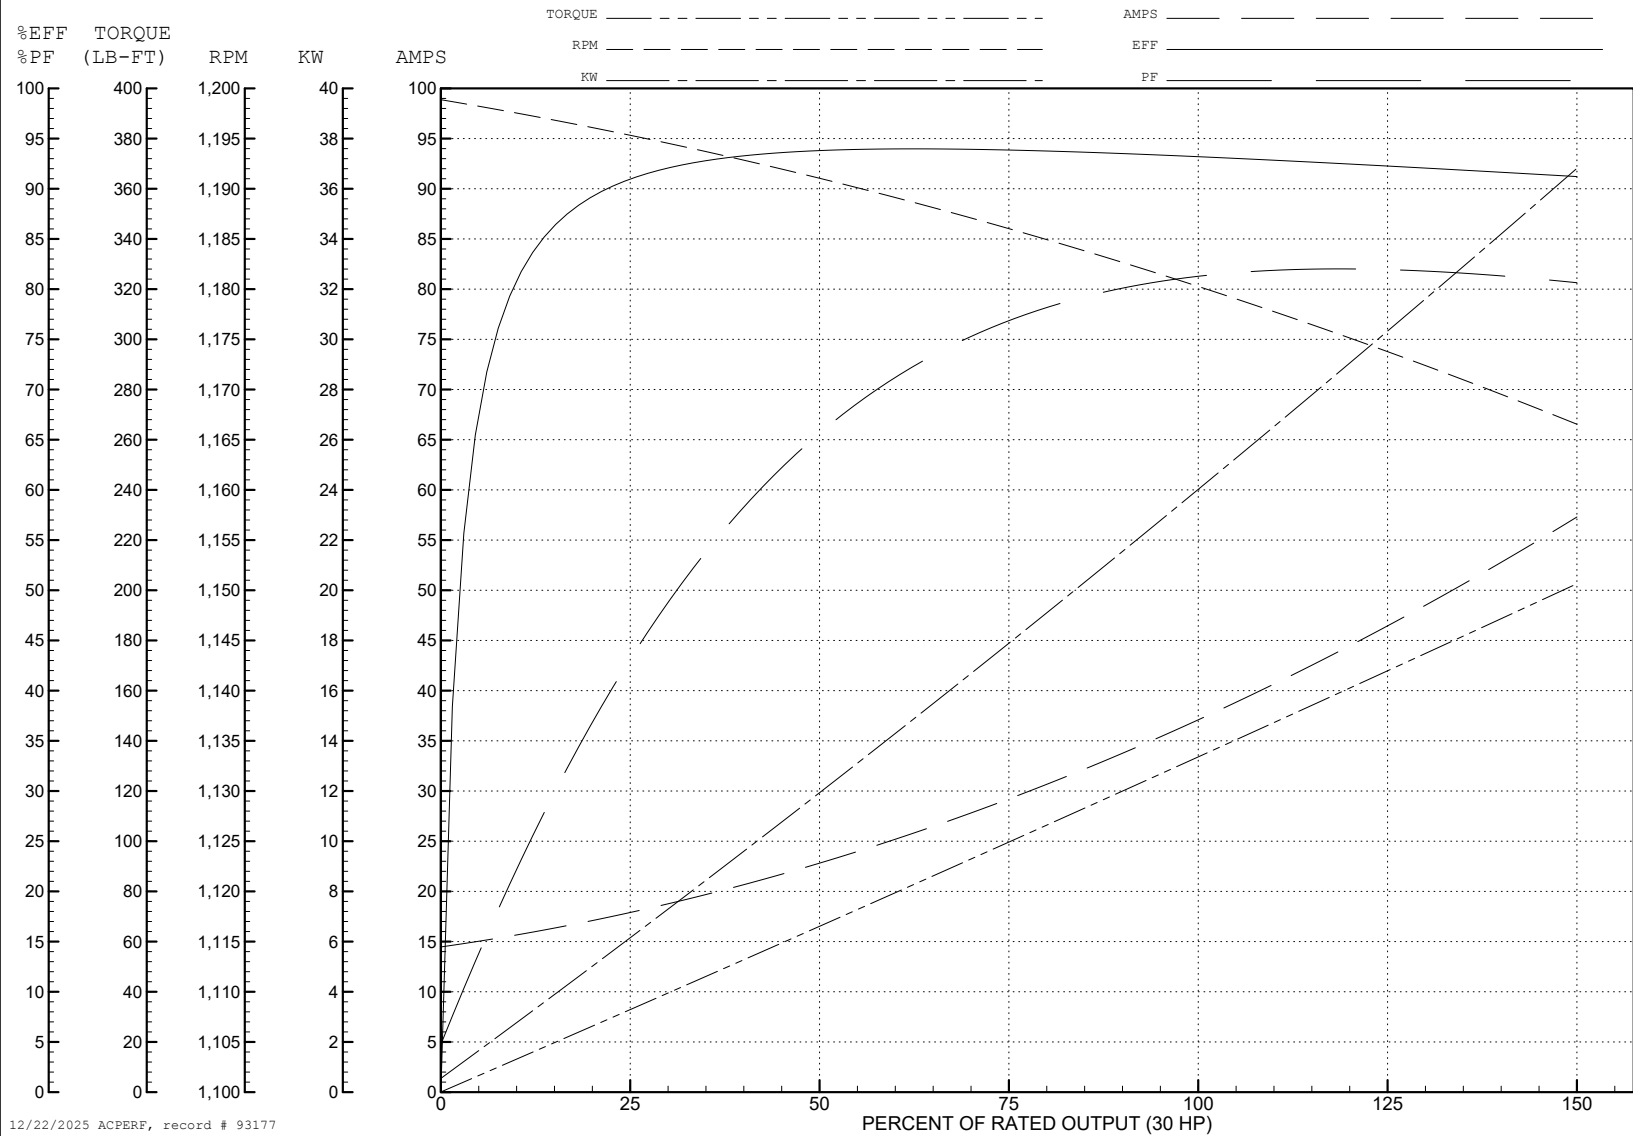

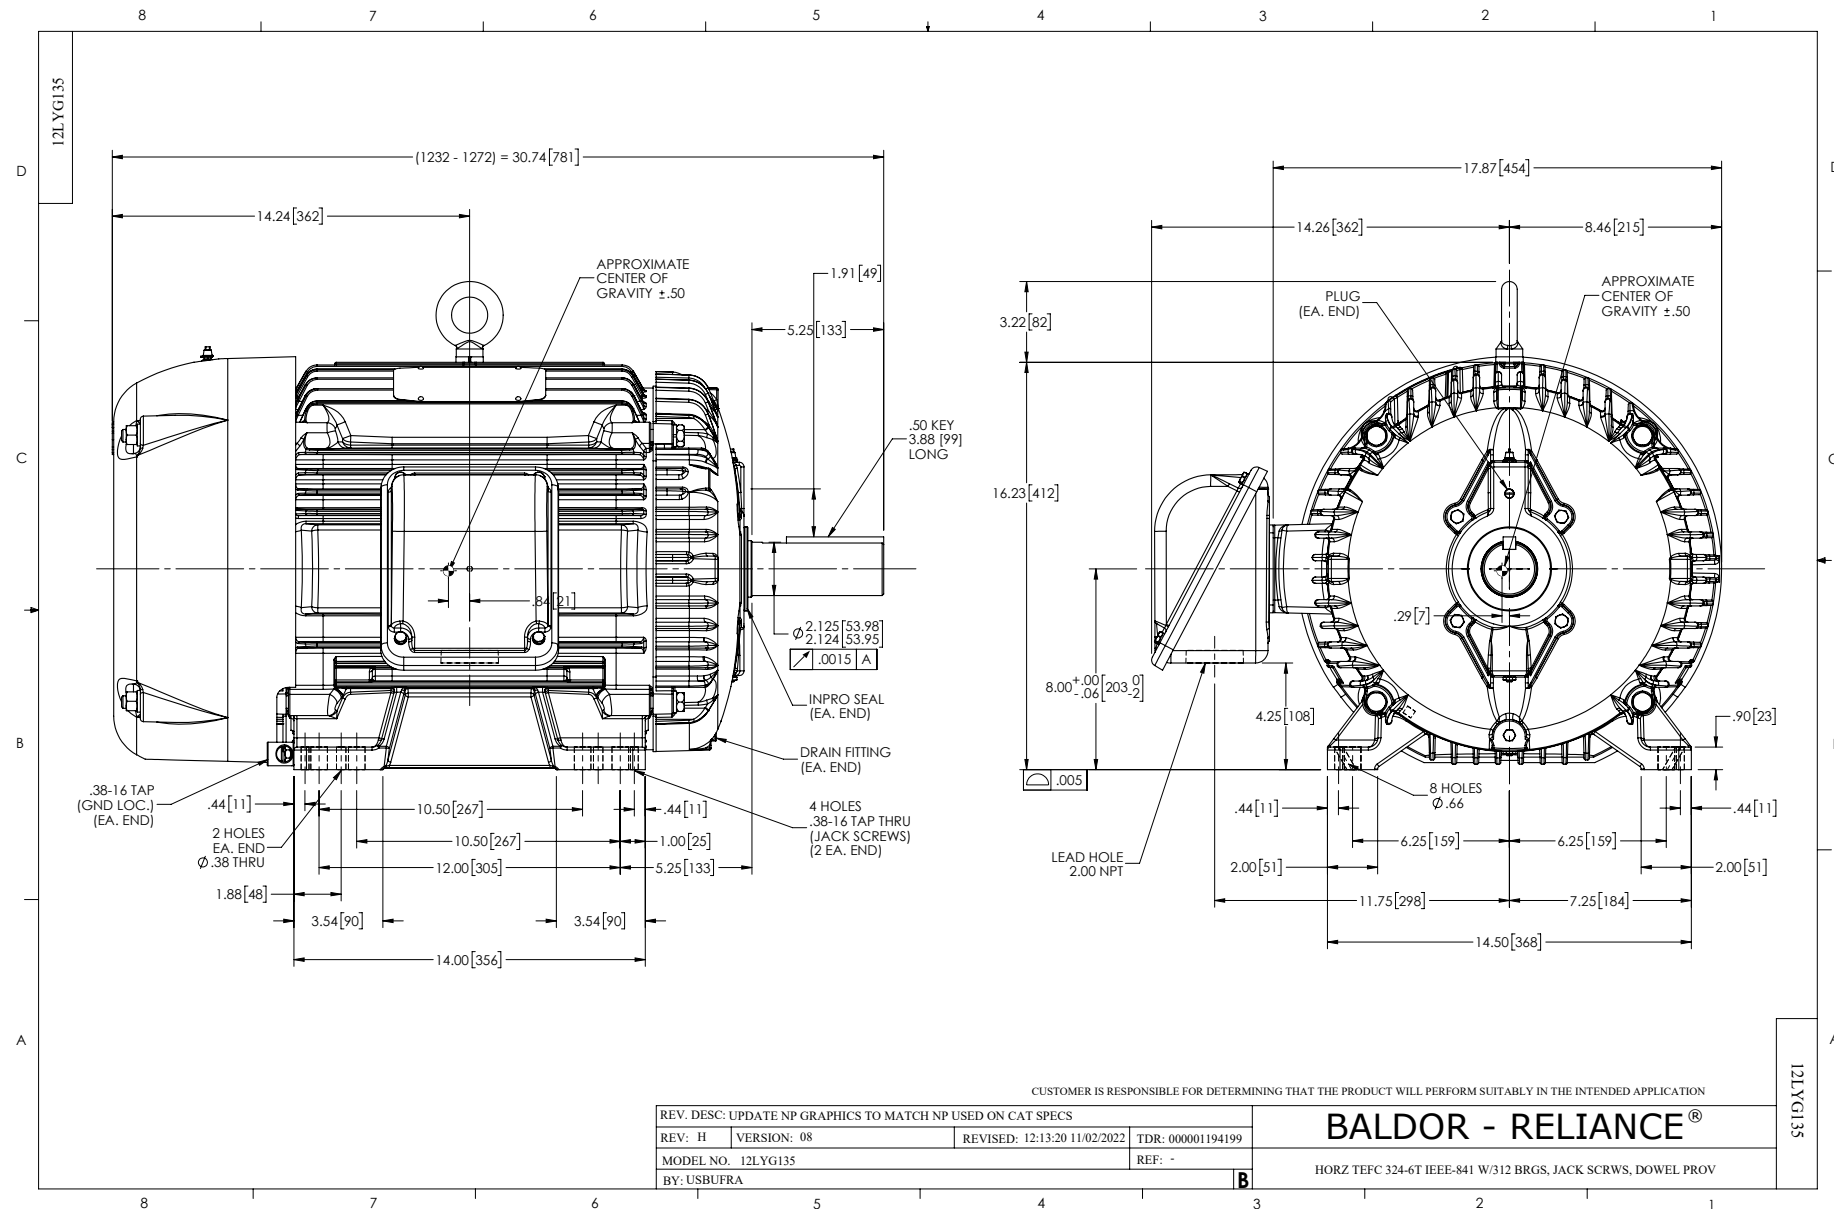


CD0006

TYPICAL WYE-CONNECTED MOTOR

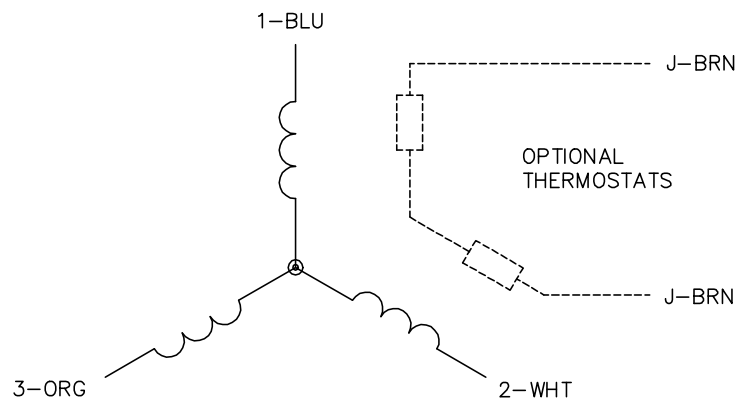

TYPICAL DELTA-CONNECTED MOTOR

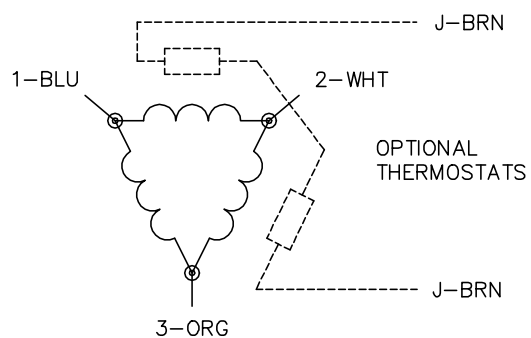

NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007

REV. LTR: E

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\141

REVISED: 10:24:49 02/19/2019

BY: ENBRIRO

MTL: —



BALDOR - RELIANCE®

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1